



Using the fidelity and other metrics to measure gate performance

05.04.2018 | DENNIS WILLSCH

Willsch *et al.*, Phys. Rev. A **96**, 062302 (2017)

What is the fidelity?

◆ Measure for gate performance

◆ Idea: Average performance over random states

$$F_{\text{avg}} = \int d|\psi\rangle \langle\psi| \mathcal{G}_{ac}(\mathcal{G}_{id}^{-1}(|\psi\rangle\langle\psi|)) |\psi\rangle \quad \text{Nielsen, Phys. Lett. A } \mathbf{303}, 249 \text{ (2002)}$$


◆ Experiment: Randomized Benchmarking

Emerson *et al.*, J. Opt. B **7**, S347 (2005)

Magesan *et al.*, Phys. Rev. A **85**, 042311 (2012)

- Fit exponential decay
- Produces a single number
- Scales well to many qubits

◆ What is the problem?

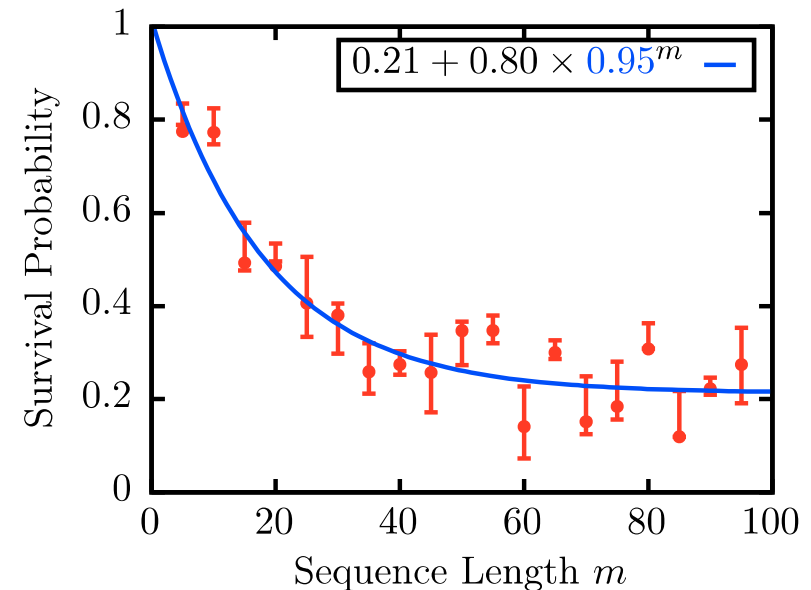

Problems with RB and the fidelity

◆ RB does not measure the fidelity

- Tiny error in frequency: $F_{\text{avg}} = 0.999 \Leftrightarrow \text{RB: } 0.99999$
Proctor *et al.*, Phys. Rev. Lett. **119**, 130502 (2017)

◆ Fidelity does not give the error rate for fault-tolerance

- ✗ IBM: “fidelity above 0.995 suffices” Chow *et al.*, Phys. Rev. Lett. **109**, 060501 (2012)

- ✗ Google: “fault-tolerance threshold passed” Barends *et al.*, Nature **508**, 500 (2014)

- ➔ Required for two-qubit gate: $F_{\text{avg}} > 0.999995$
Sanders *et al.*, New J. Phys. **1**, 012002 (2016)

◆ Are other metrics better?

◆ Can they actually predict gate performance?

Other gate metrics

$$\mathcal{G}_{ac}(|\psi\rangle\langle\psi|) = M |\psi\rangle\langle\psi| M^\dagger$$
$$\mathcal{G}_{id}(|\psi\rangle\langle\psi|) = U |\psi\rangle\langle\psi| U^\dagger$$

Average Gate Fidelity “statistical average”

$$F_{\text{avg}} = \int d|\psi\rangle \langle\psi| \mathcal{G}_{ac}(\mathcal{G}_{id}^{-1}(|\psi\rangle\langle\psi|)) |\psi\rangle$$

Nielsen, Phys. Lett. A **303**, 249 (2002)

Diamond Norm “worst-case error”

$$\eta_{\diamond} = \frac{1}{2} \left\| \mathcal{G}_{ac} \circ \mathcal{G}_{id}^{-1} - \mathbb{1} \right\|_{\diamond}$$

Kitaev, Russian Mathematical Surveys **52**, 1191 (1997)

Unitarity “quantifies leakage”


$$u = \frac{d}{d-1} \int d|\psi\rangle \text{Tr} [\mathcal{G}'_{ac}(|\psi\rangle\langle\psi|)^\dagger \mathcal{G}'_{ac}(|\psi\rangle\langle\psi|)]$$

Wallman et al., New J. Phys. **17**, 113020 (2015)

Simulation of the hardware

Hardware: IBMQX

IBM Quantum Experience

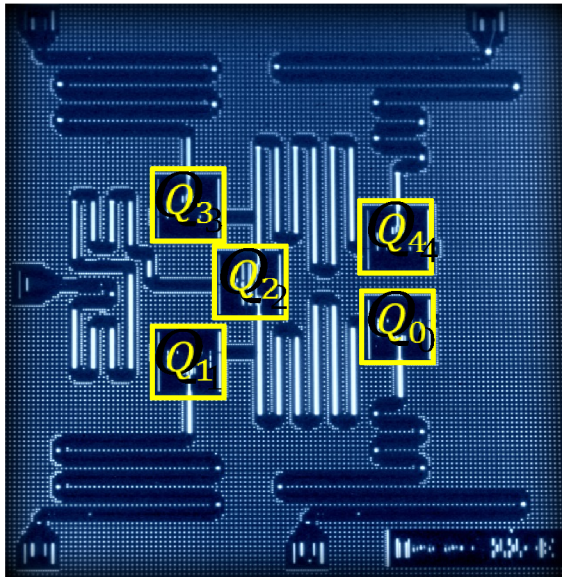

Simulation: TDSE


Time-dependent
Schrödinger Equation

$$i\frac{\partial}{\partial t} |\Psi(t)\rangle = H(t) |\Psi(t)\rangle$$


State of the
qubits

Simulation of the hardware


How to run a quantum circuit?

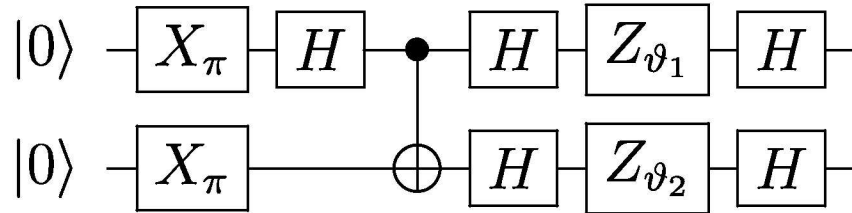

Each gate $\rightarrow$ Voltage pulse

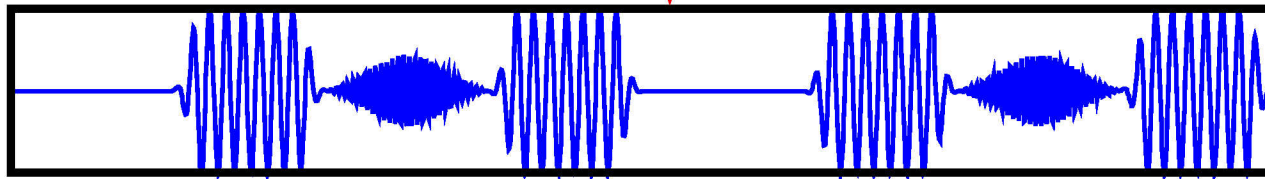

$$H_{\text{CPB}} = \sum_{i=1}^{N_{\text{Tr}}} \left[E_{Ci} (\hat{n}_i - n_{gi}(t))^2 - E_{Ji} \cos \hat{\varphi}_i \right]$$

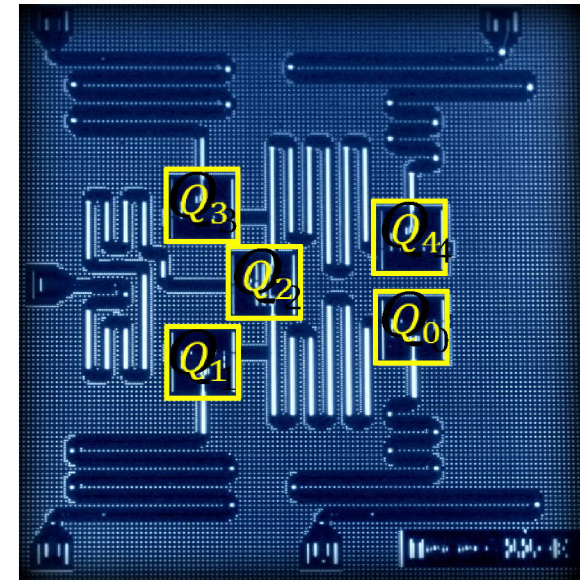

Simulation of the hardware


Single-qubit gates:

Gaussian pulse



Two-qubit gates:

Cross-resonance pulse

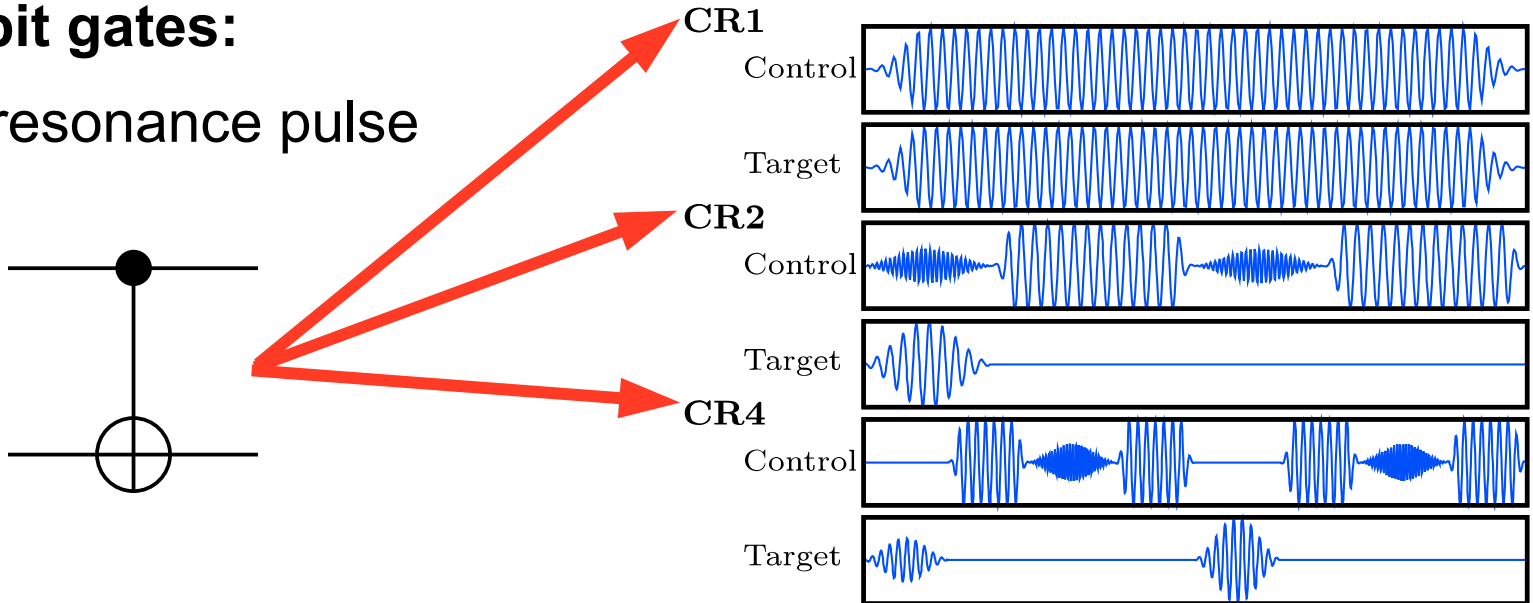

Pulses are optimized to be as good as theoretically possible!

Results: Fidelity

Gate	F_{avg}
$X_{\pi/2}^1$	0.9946
$X_{\pi/2}^2$	0.9942
X_{π}^1	0.9949
X_{π}^2	0.9943
CR2 ₁₂	0.9943
CR2 ₂₁	0.9947




**Fidelity is
always the same**

Results: Fidelity


Gate	F_{avg}
$X_{\pi/2}^1$	0.9946
$X_{\pi/2}^2$	0.9942
X_{π}^1	0.9949
X_{π}^2	0.9943
CR2₁₂	0.9943
CR2₂₁	0.9947

**Fidelity is
always the same**


(a) X simulation

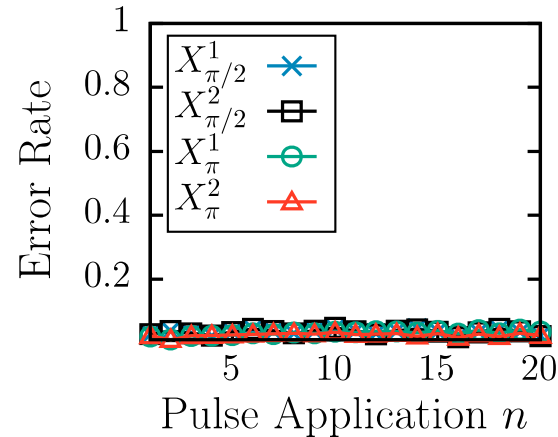

(c) CR2 simulation

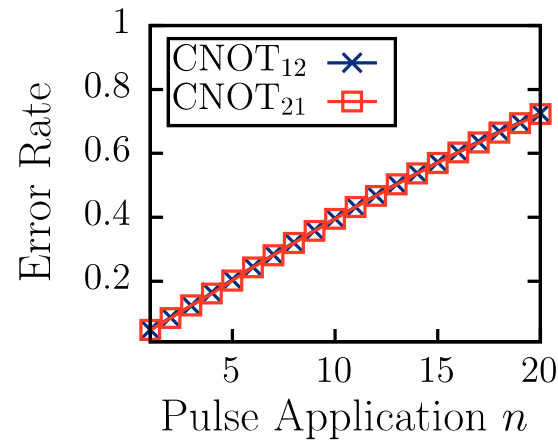

(c) CR2 simulation

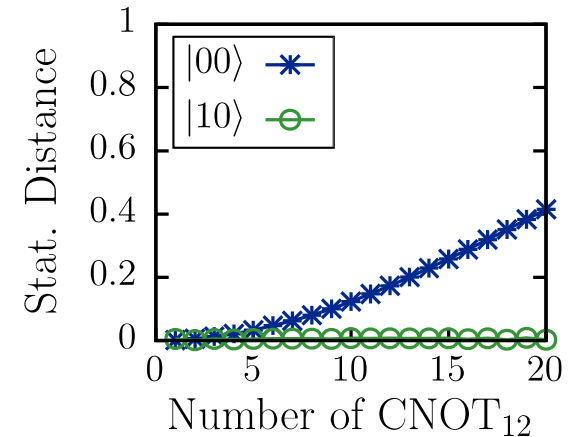


Results: Fidelity


Gate	F_{avg}
$X_{\pi/2}^1$	0.9946
$X_{\pi/2}^2$	0.9942
X_{π}^1	0.9949
X_{π}^2	0.9943
CR2₁₂	0.9943
CR2₂₁	0.9947

**Fidelity is
always the same**

(a) X simulation

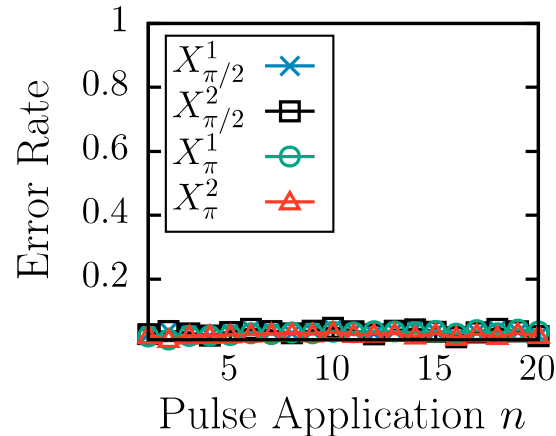


(c) CR2 simulation

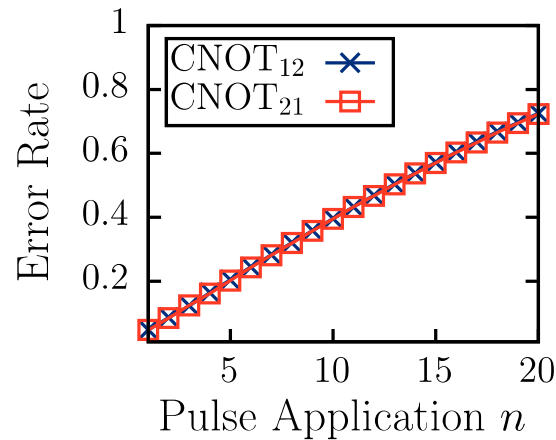


Experiment

(a) IBMQX (using CR2)

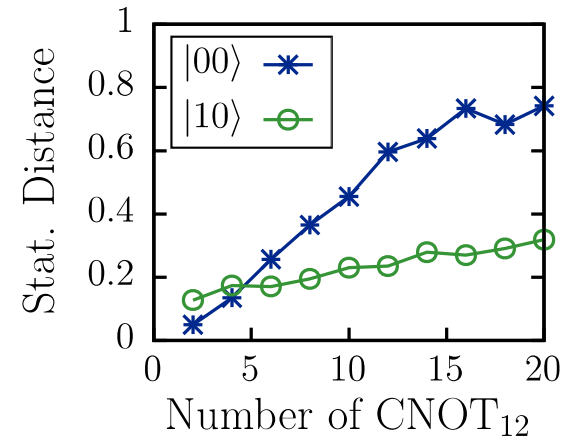


(c) CR2 simulation

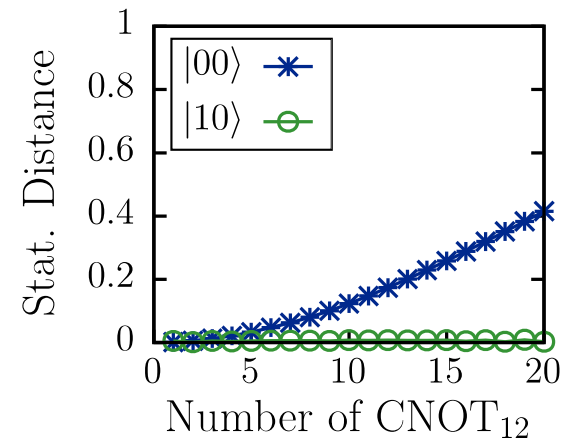


Results: Other gates and metrics

	Gate	F_{avg}	$\eta_{\diamond}$	u
	$X_{\pi/2}^1$	0.9946	0.027	0.990
	$X_{\pi/2}^2$	0.9942	0.028	0.989
	X_{π}^1	0.9949	0.020	0.990
	X_{π}^2	0.9943	0.023	0.989
3 →	CR1₁₂	0.9842	0.029	0.969
1 →	CR1₂₁	0.9951	0.033	0.991
	CR2₁₂	0.9943	0.048	0.991
	CR2₂₁	0.9947	0.048	0.992
2 →	CR4₁₂	0.9934	0.049	0.989
	CR4₂₁	0.9946	0.044	0.991


(a) X simulation

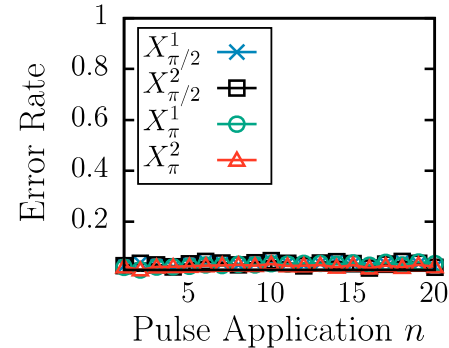


(b) CR1 simulation

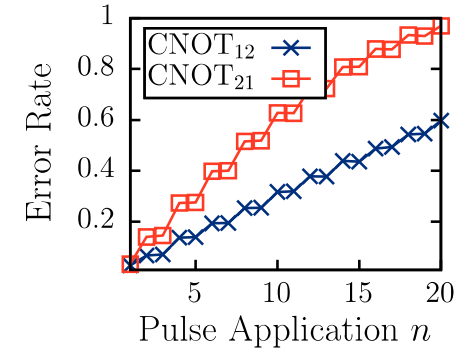

(c) CR2 simulation

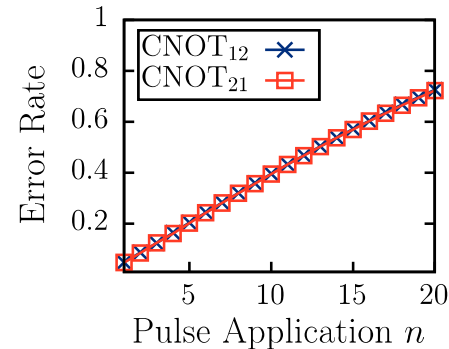

(d) CR4 simulation

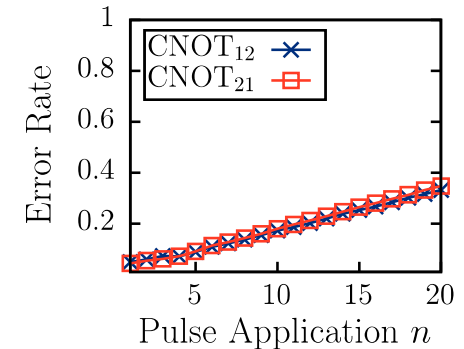

- 1) Best fidelity **BUT** worst performance
- 2) Worst diamond norm **BUT** better performance
- 3) Unitarity: helps theoretically **BUT** not practically


Conclusions

- ✓ RB is a stable, scalable procedure for an initial assessment
- ✗ RB does not measure the fidelity Proctor *et al.*, Phys. Rev. Lett. **119**, 130502 (2017)
- ✗ RB conceals systematic errors (→randomization)
 - ➔ Don't trust a single, statistical number
- ✗ Fidelity is not sufficient for fault-tolerance Sanders *et al.*, New J. Phys. **1**, 012002 (2016)
- ✗ None of the gate metrics can reliably predict gate performance Willsch *et al.*, Phys. Rev. A **96**, 062302 (2017)
 - for repeated applications
 - for use in a quantum algorithm
- ➔ Repeat gate pulses
- ➔ Run specific (identity) circuits for benchmarking Michielsen *et al.*, Comp. Phys. Comm. **220**, 44 (2017)

**THANK YOU
FOR YOUR ATTENTION**

Why can't RB measure the fidelity?


Proctor *et al.*, Phys. Rev. Lett. **119**, 130502 (2017)

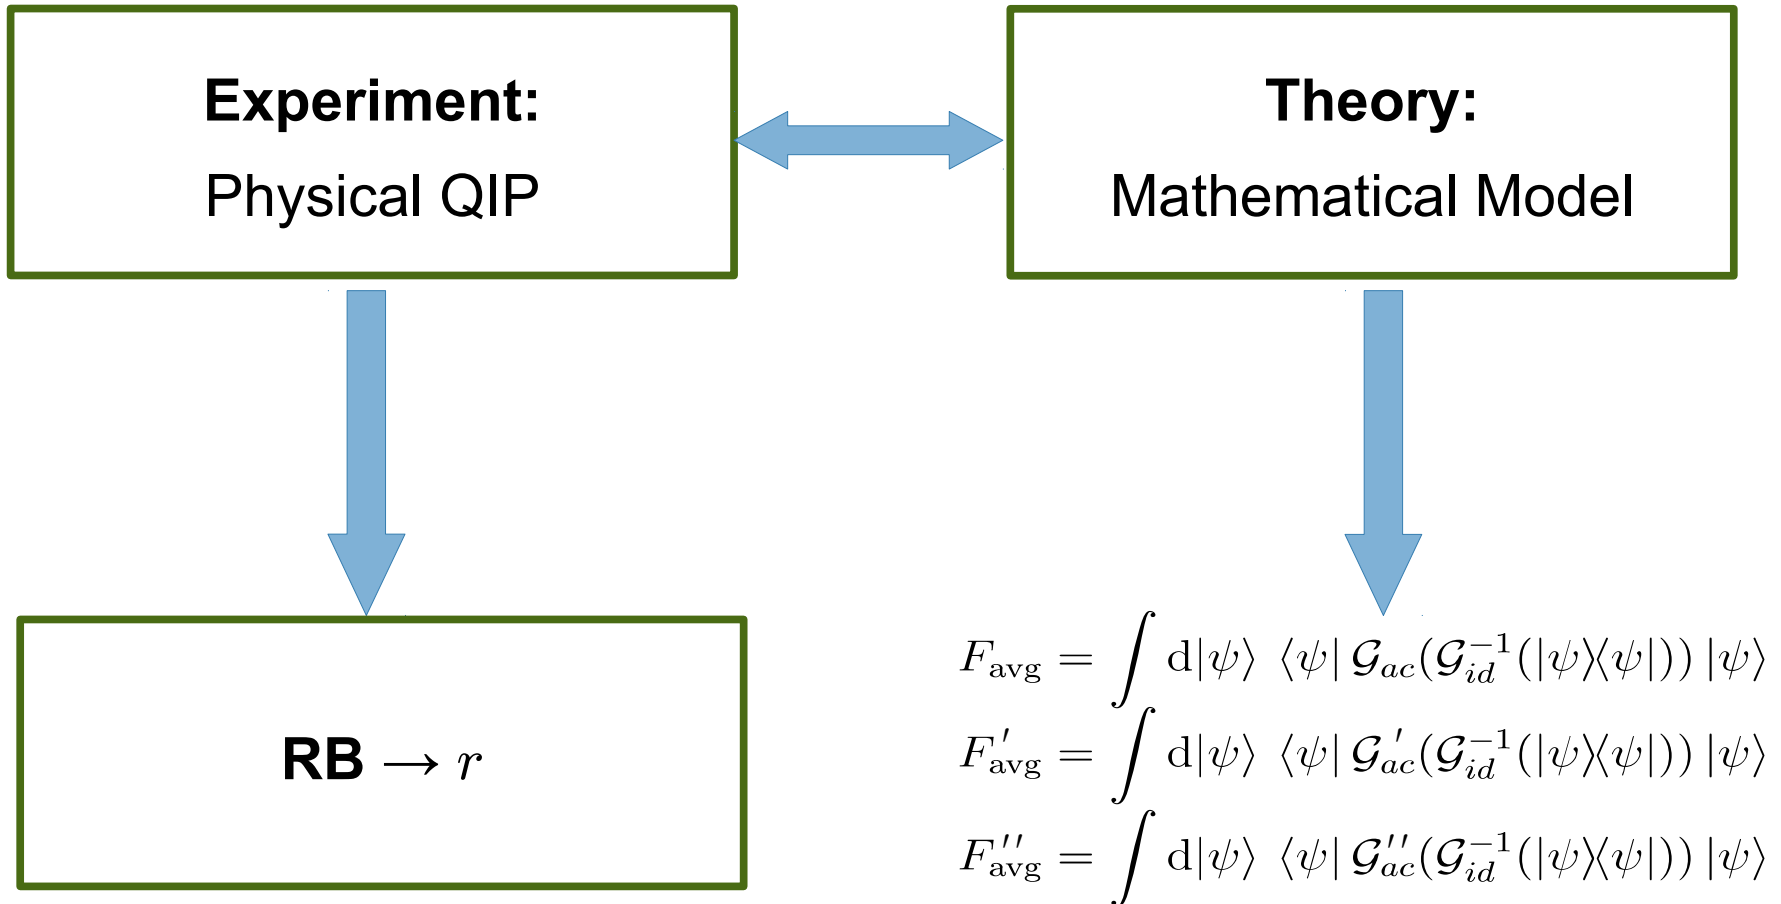

Optimization of gate pulses

Willsch *et al.*, Phys. Rev. A **96**, 062302 (2017)


- ◆ Many parameters → multidimensional optimization

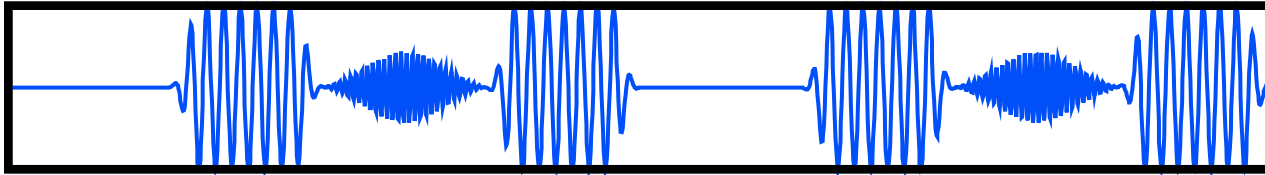


- ◆ With gradients: FR, PR, DFP / BFGS (quasi-Newton)
- ◆ Gradient-free: Nelder-Mead (downhill simplex), Powell's
- ◆ Machine learning → neural networks
- ◆ ... many other complex ideas
- ✓ Can improve the fidelity a little bit
- ✗ Does not necessarily improve the gates in real applications!
- ➔ Our observation: Best performance obtained by sticking to the model and fine-tune parameters with Nelder-Mead

Repeated CNOT Gates


(a) IBMQX (using CR2)

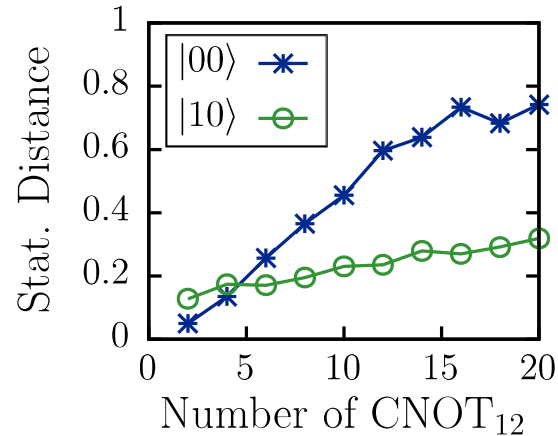


(b) CR1 simulation

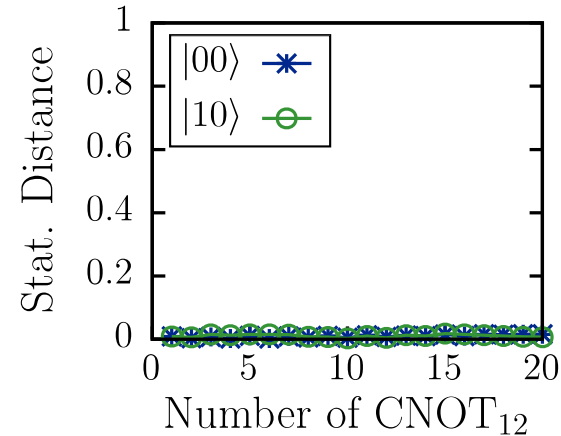


(c) CR2 simulation

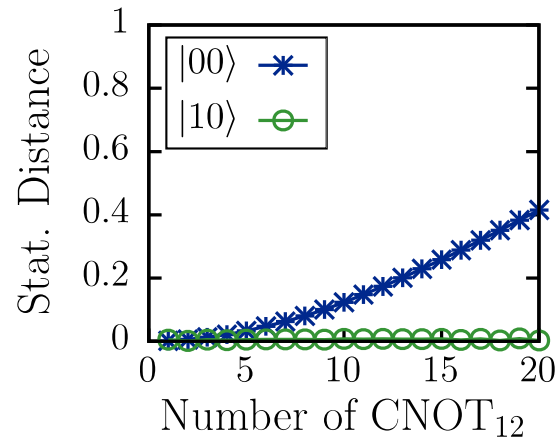

(d) CR4 simulation

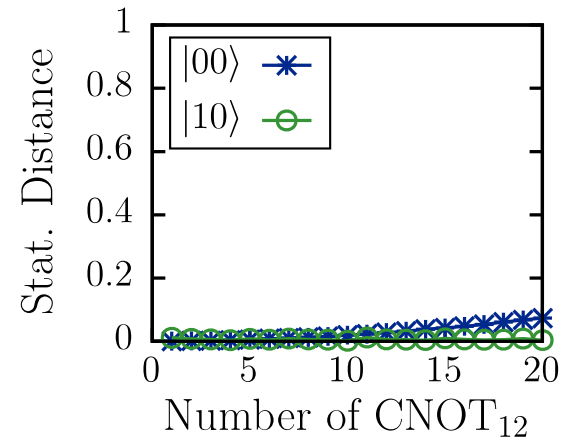

CNOT in QFT

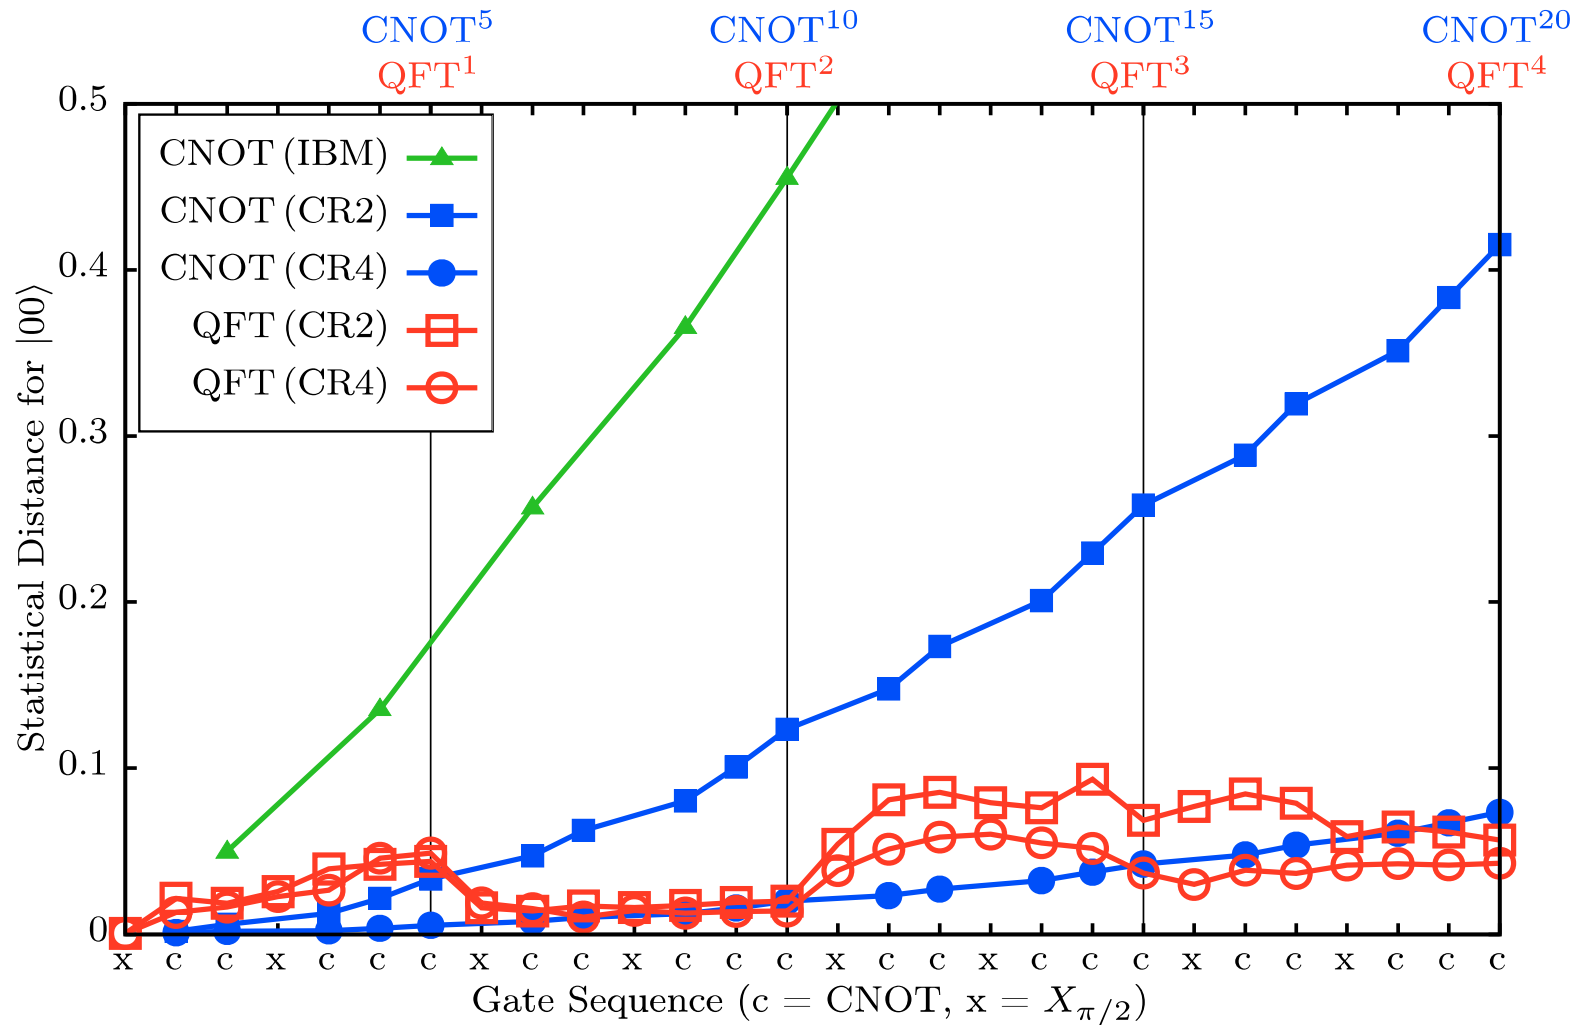

Simulation of the Hardware

Hardware → Hamiltonian


$$H = H_{\text{CPB}} + H_{\text{Res}} + H_{\text{CC}}$$

Qubits: Transmons

$$H_{\text{CPB}} = \sum_{i=1}^{N_{\text{Tr}}} \left[E_{Ci} (\hat{n}_i - n_{gi}(t))^2 - E_{Ji} \cos \hat{\varphi}_i \right]$$

Coupling: Resonators

$$H_{\text{Res}} = \omega_r \hat{a}^\dagger \hat{a} + \sum_{i=1}^{N_{\text{Tr}}} g_i \hat{n}_i (\hat{a} + \hat{a}^\dagger)$$

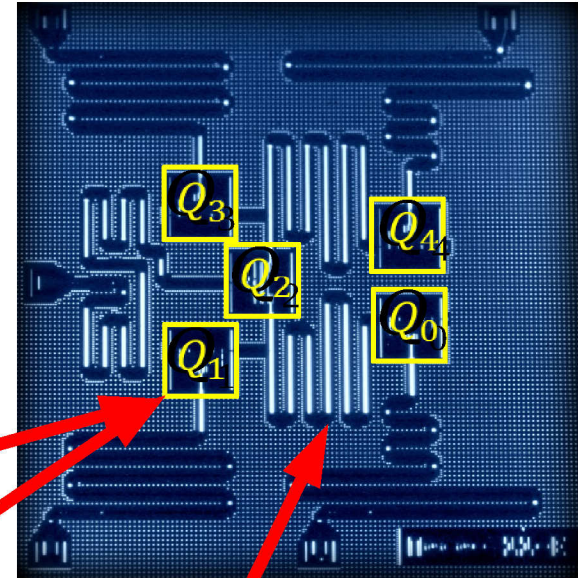

IBMQX Transmon System

$$H = H_{\text{CPB}} + H_{\text{Res}} + H_{\text{CC}}$$

$$H_{\text{CPB}} = \sum_{i=1}^{N_{\text{Tr}}} \left[E_{Ci} (\hat{n}_i - n_{gi}(t))^2 - E_{Ji} \cos \hat{\varphi}_i \right]$$

$$H_{\text{Res}} = \omega_r \hat{a}^\dagger \hat{a} + \sum_{i=1}^{N_{\text{Tr}}} g_i \hat{n}_i (\hat{a} + \hat{a}^\dagger)$$

$$H_{\text{CC}} = \sum_{1 \leq i < j \leq N_{\text{Tr}}} E_{Ci,Cj} \hat{n}_i \hat{n}_j$$

Transmon	$E_{Ci}/2\pi$	$E_{Ji}/2\pi$	$\omega_i/2\pi$	$\omega_r/2\pi$	$g_i/2\pi$
1	1.204	13.349	5.350	7	0.07
2	1.204	12.292	5.120	7	0.07

