

Review

<https://doi.org/10.48130/een-0025-0015>

Techno-economic and life-cycle assessments of biomass thermochemical conversion into gaseous fuels

Muhammad Saddam Hussain^{1,2}, Meng Shi³, Shiyu Zhang^{1,2}, Yeshui Zhang⁴, Xuan Bie^{1,2}, Qinghai Li^{1,2}, Yanguo Zhang^{1,2}, Sebastian Lubjuhn⁵, Sandra Venghaus^{5,6*} and Hui Zhou^{1,2*}

Received: 20 August 2025

Revised: 26 October 2025

Accepted: 9 December 2025

Published online: 31 December 2025

Abstract


This review provides a comprehensive analysis of techno-economic and life-cycle assessments (TEA and LCA) for biomass thermochemical conversion processes that yield gaseous fuels such as syngas, hydrogen, and methane. The study analyzes core issues, including the influence of feedstock diversity, technological maturity, major cost factors, carbon reduction potential, and environmental outcomes of thermochemical conversion approaches. Research was systematically gathered with an emphasis on works that integrate TEA and LCA for comparative evaluation. An analysis of the production processes shows that both the characteristics of biomass feedstocks and local supply chain logistics critically affect process efficiency and cost-effectiveness. Persistent challenges include catalyst degradation and the integration of carbon capture and storage, which significantly impact technical feasibility and costs. LCA demonstrates that, when paired with effective carbon capture, several conversion pathways can result in net negative greenhouse gas emissions, although modeling and data uncertainties remain. The review highlights the promise of modular, locally adapted biorefineries underpinned by strong policy support, calling for methodological standardization and technological innovation to drive progress toward decarbonized fuel production.

Keywords: Biomass, Thermochemical conversion, Techno-economic analysis, Life-cycle analysis, Gaseous fuels

Highlights

- Bridges TEA and LCA to map biomass-to-gas climate and cost trade-offs.
- Shows biomass hydrogen and methane can outgreen fossil fuels with smart design.
- Links carbon pricing and tech readiness levels to real project bankability.
- Surfaces social, regional and food–fuel tensions in scaling gaseous biofuels.

Graphical abstract

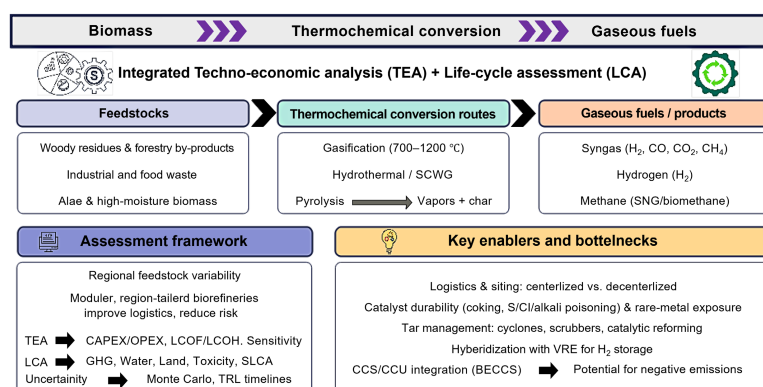

* Correspondence: Sandra Venghaus (venghaus@soecon.rwth-aachen.de); Hui Zhou (huizhou@tsinghua.edu.cn)

Full list of author information is available at the end of the article.

Introduction

Energy production and consumption play a crucial role in the world's scientific, economic, and social environment that humanity has constructed throughout time^[1]. The contemporary economy is primarily propelled by energy, with a worldwide energy demand of roughly 13,973 million tons of oil equivalent (Mtoe). By 2019, 85% of global energy demand was met by fossil fuels^[2]. In recent decades, the growing demand for fossil fuels, urbanization, and modernization have led to a significant increase in the emissions of greenhouse gases (GHG). The atmospheric carbon dioxide (CO₂) concentration increased from approximately 280 ppm before the Industrial Revolution to approximately 418.9 ppm in 2023^[3]. The atmospheric CO₂ concentration is projected to reach around 570 ppm by the end of this century^[4].

Consequently, there has been an estimated rise in the global mean temperature of 0.85 °C since the 18th Century^[5]. In an effort to ameliorate the potentially disastrous effects of global warming, the Intergovernmental Panel on Climate Change (IPCC) has recommended limiting temperature increases to 2 °C, with a preferable target of 1.5 °C by the end of the current century^[6]. The task of reducing CO₂ emissions is a challenging and enduring endeavour. As recommended in the fifth edition of the IPCC, a comprehensive transformation of worldwide energy supply systems, lifestyles, and dietary requirements is necessary. The depletion of fossil fuels is also a serious concern^[7]. It is imperative to persist in commercializing low-carbon and carbon-neutral resources for chemicals, energy, materials, and technologies to facilitate the adoption of low-carbon pathways. The 2016 Paris Agreement underscores the need for a phased reduction in fossil fuel dependency, targeting a 50% reduction in CO₂ emissions through the increased integration of renewable energy sources^[8]. Biomass has emerged as a promising feedstock in this transition due to its carbon neutrality. It has been reported that 80%–90% GHG emissions can be reduced by replacing fossil fuels with biomass^[9]. The shift from a carbon economy of fossil fuel-dependent to a bio-based fuel is anticipated to undergo a gradual and ongoing transformation in the next few decades, with a consequential impact on all processing industries^[10].

In the future, a bio-based alternative is expected to supplant the petrochemical product tree. The transition in raw materials should be perceived as an opportunity to restructure the industrial chain by utilizing renewable raw feedstocks to create novel products rather than as a potential hazard^[10]. The utilization of bio-based carbon in biomass processes is characterized by its sustainability and renewability, resulting in a near carbon-neutral outcome. The implementation of suitable residue management strategies can result in a carbon-negative process. The emergence of bio-based fuels can be attributed to the availability of resources, advances in science and technology, and favourable policies.

Unlike other renewable energy sources such as wind, solar, geothermal, or hydropower, biomass is unique in its capacity to store carbon-based chemical energy. It serves as a readily available resource for biofuel production, aligning with global policy efforts to decarbonize the transportation sector. Initially, biofuel policies focused on first-generation biofuels derived from food crops such as corn, sugarcane, and canola. However, concerns over indirect land-use change (iLUC), GHG emissions, and food security have prompted a shift toward second- and third-generation biofuels, derived from non-food biomass sources such as agricultural residues, algae, and woody biomass^[11]. Advanced synthetic biofuels offer the advantage of higher energy yields while preventing negative ecological and socio-economic side-effects such as high GHG emissions

through indirect land-use change (iLUC)^[11], or the competition manifested in the food-vs-fuel debate.

Recent policy frameworks, such as the European Union's Renewable Energy Directive (2018/2001), impose strict limitations on biofuels with a high iLUC risk^[12]. Similarly, the ReFuelEU Aviation initiative, as part of the EU Fit for 55 Package, promotes second- and third-generation biofuels as sustainable alternatives for decarbonizing the aviation sector^[13]. Globally, governments are implementing policies to accelerate the adoption of advanced biofuels. The U.S. Renewable Fuel Standard (RFS) mandates annual volume targets for four fuel categories: (a) cellulosic biofuel, (b) biomass-based diesel, (c) advanced biofuel, and (d) renewable fuel^[14]. China has also implemented and supported renewable energy production, such as solar, wind, and biomass, including gasification, liquefaction, and direct combustion^[15]. In 2023, the global power production was sourced 26% from coal, 32% from petroleum, 23% from natural gas, and 14% from renewables^[16]. These data underscore the urgent need to scale up bio-based energy solutions to achieve a sustainable energy transition.

As the global energy landscape evolves, the demand for renewable and low-carbon fuels is projected to rise substantially. With continuous advancements in technology and policy frameworks, second-generation biofuels are gaining momentum as a promising pathway toward sustainable and environmentally friendly energy solutions. However, accurately assessing their feasibility and advantages over conventional fossil fuels requires scientifically rigorous and data-driven methodologies^[17]. Life-cycle assessment (LCA) and techno-economic analysis (TEA) play a crucial role in evaluating novel biofuel technologies by systematically analyzing their socio-economic, environmental, and technical feasibility^[18]. LCA focuses on quantifying environmental aspects such as GHG emissions, energy consumption, and resource utilization, while TEA assesses economic viability by estimating production costs, investment requirements, and market competitiveness.

A key focus of these assessments lies in the production phase, where LCA and TEA aid in optimizing design parameters and estimating the market price of value-added biofuel products. Before large-scale investment in emerging biofuel technologies, funding agencies and policymakers require a thorough evaluation of both environmental performance and economic feasibility. This is particularly critical for thermochemical conversion processes, which must demonstrate commercial viability before widespread adoption. When conducting LCA for biomass thermochemical conversion processes, explicitly addressing uncertainties is critical for ensuring robust and reliable results^[19]. Three primary types of uncertainty commonly considered are parameter uncertainty, model uncertainty, and scenario uncertainty. Integrating systematic uncertainty and sensitivity analysis through methods like Monte Carlo simulations provides transparency and enhances the credibility and applicability of LCA findings. This approach supports informed decision-making by clearly communicating the potential variability and limitations inherent in LCA studies^[20].

Biomass, as a renewable feedstock, is broadly categorized into lignocellulosic sources such as wood, straw, and grass, and non-lignocellulosic sources like sludge, algae, and oil^[21]. Compared to coal, as listed in Table 1, biomass typically has higher moisture content, increased volatile matter, elevated oxygen content calculated by the difference from ultimate analysis results, and lower carbon content, all of which influence the choice of conversion pathways^[22–26]. Several methods transform biomass into fuels or chemicals, including thermochemical pathways^[27] (i.e., combustion, pyrolysis, gasification, and hydrothermal treatment) and

Table 1 Proximate and ultimate analysis of various types of biomass^[22–26]

Biomass	Proximate analysis (% , as received basis)			Ultimate analysis (% , dry ash-free basis)				
	Ash	Moisture	Organic fraction	C	H	N	S	O
Wood	1.8	19.8	78.4	50.8	6.1	0.3	0.1	42.7
Legume straw	9.8	1.6	73.7	43.3	5.6	0.6	0.1	50.4
Apricot stone	8.5	0.2	75.1	44.4	5.7	0.4	0.0	49.5
Hornbeam shell	9.5	2.3	78.8	41.8	5.4	0.60	0.0	52.3
Hornbeam sawdust	0.5	8.8	78.1	45.2	6.6	0.0	0.0	48.2
Rice husk	12.9	1.1	70.5	42.0	5.4	0.4	0.0	39.3
Straw	6.4	12.7	80.9	48.9	5.9	0.8	0.2	43.9
Safflower	2.2	5.7	80.8	60.5	9.8	3.1	0.0	27.4
Sludge	25.7	32.5	41.8	50.2	7.1	5.6	1.8	34.9
Manure	17.2	43.6	39.2	50.2	6.5	6.5	0.9	34.6
Vegetable oils	0.0	0.0	100.0	75.4	11.7	0.0	12.9	0.0

biochemical pathways (i.e., anaerobic digestion and fermentation)^[28]. Thermochemical conversion processes operate at higher temperatures, allowing for shorter reaction times and nearly complete degradation of biomass components^[28]. Some of these processes require catalysts, particularly in tar cracking and reforming, to improve efficiency. The primary products of thermochemical conversion include gaseous fuels such as syngas from gasification and hydrothermal gasification, and liquid biofuels such as bio-oil from pyrolysis and hydrothermal liquefaction, both of which require upgrading to meet fuel standards.


Biochemical conversion, including anaerobic digestion and fermentation, primarily produces liquid biofuels and biogas, which can also undergo refinement to obtain high-value biofuels. While both thermochemical and biochemical conversion technologies share similarities with traditional oil refinery processes, further research and development of H₂-rich processes, such as water gas shift (WGS) reaction, are necessary to improve their economic competitiveness against fossil fuels^[29]. As biofuels are increasingly recognized as viable alternatives to fossil-based energy^[30], optimizing their production processes and enhancing their commercial feasibility will be critical to accelerating their adoption. The thermochemical conversion pathways involved in biomass-to-biofuel transformation are illustrated in Fig. 1.

The performance and economics of biomass thermochemical conversion are strongly influenced by the inherent variability of feedstocks, especially in tropical and arid regions. Biomass sourced from tropical climates such as sugarcane bagasse, oil palm residues, and fast-growing grasses typically exhibits very high moisture content, often exceeding 50% by weight, as well as significant

variability in ash content and mineral composition^[21]. High moisture content imposes substantial additional energy demands for drying prior to gasification or pyrolysis, directly increasing operating costs and reducing net system efficiency. In many cases, the parasitic load for drying tropical biomass can represent 15%–30% of total process energy, potentially undermining the overall energy balance if waste heat or low-grade renewable energy is not available^[21]. Regional feedstock characteristics thus have direct techno-economic implications, affecting energy yield, process design, capital expenditure (e.g., for robust handling and cleaning equipment), and supply chain configuration. Integrating robust LCA and TEA frameworks with local feedstock assessment is essential for accurately predicting system performance and economic feasibility in both tropical and arid environments.

TEA is a widely used methodology for assessing the financial viability of emerging technologies, while LCA evaluates their environmental impact. These evaluations are typically conducted using specialized software (e.g., Aspen, OpenLCA, and SimaPro) that simulates the environmental consequences of a process based on key input parameters, including process variables, energy consumption, and material flows. While numerous studies have focused on the production of liquid biofuels, fewer have examined the socio-economic and environmental implications of biomass thermochemical conversion into gaseous biofuels.

This review specifically investigates the thermochemical conversion of various biomass feedstocks into gaseous biofuels, namely: (a) bio-based hydrogen, (b) bio-based methane, and (c) bio-based syngas. It provides a comprehensive analysis of the technical and economic feasibility of these processes alongside their

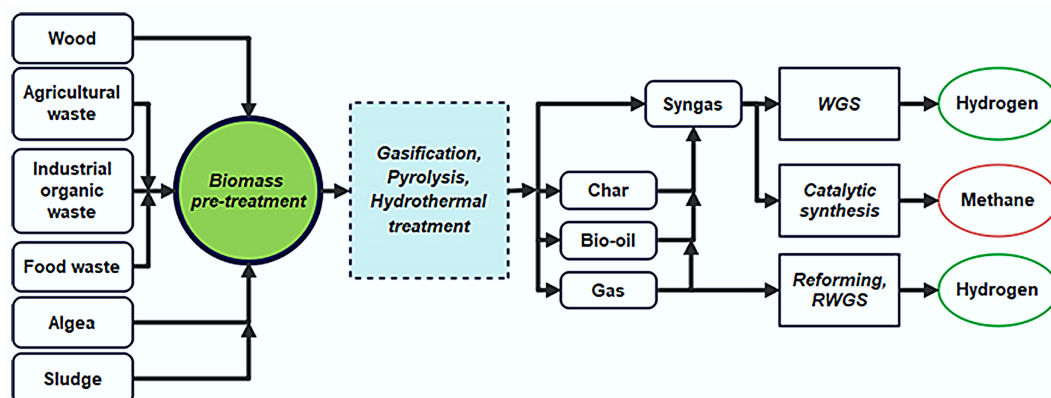**Fig. 1** Schematic flowchart for thermochemical conversion of biomass into syngas, bio-oil, and char.

environmental implications. By integrating TEA and LCA, this study aims to identify research gaps for guiding future research and tackling challenges in developing technologies for producing gaseous fuels by thermochemical conversion from biomass.

Several review articles on biomass thermochemical conversion processes have recently been published. Adeniyi et al.^[31] evaluated biochar derived from leaves, discussing different thermochemical conversion techniques and key properties influencing its environmental uses (feedstock characterization). Ighalo^[32] examined thermochemical methods for transforming bio-wastes into eco-friendly sorbents, focusing on their water decontamination capabilities (environmental sustainability). Jha et al.^[33] reviewed various biomass resources and corresponding thermochemical technologies, highlighting their efficiency and selectivity toward specific products (biomass resource overview). Muh et al.^[34] systematically analyzed thermochemical conversion processes for producing fuels and valuable chemicals from biomass, emphasizing optimization strategies for improving yields (process and technology assessment). Lee et al.^[35] summarized the latest catalytic advancements in thermochemical biomass conversion, specifically addressing enhancements in biofuel production efficiency (catalyst development and TEA). Das et al. reviewed different biomass thermochemical conversion methods and compared product yield and quality^[36]. The various processes produce different amounts of products. Lewandowski et al. presented the thermochemical conversion model as a function of biomass temperature, pressure, and heating rate. The author articulated that combustion emissions can be compensated for by high-temperature gasification of biomass using steam^[37]. While several existing articles focus primarily on the technological aspects, they often overlook the importance of TEA and LCA. This review addresses that shortcoming by thoroughly analyzing thermochemical routes for producing syngas, H₂, and methane from biomass, with a particular focus on their environmental impacts and economic performance.

Recent review articles have primarily emphasized individual aspects, such as technological advancements^[35,36], specific gaseous fuel production pathways^[38], or general biomass-to-energy processes^[39,40]. For example, Das et al. extensively reviewed advancements in algal biomass conversion without comprehensive economic or life-cycle perspectives, and Lee et al. addressed

catalytic thermochemical conversions but did not include detailed economic and sustainability evaluations^[35,36]. Arregi et al.^[38] primarily focused on H₂ production technologies, with limited coverage of socioeconomic impacts and regional variability of biomass feedstocks.

Patel et al.^[39] conducted an integrated review of lignocellulosic biomass conversion pathways, but the work did not incorporate detailed socioeconomic and technology readiness level (TRL) analyses. Similarly, Kumar & Vyas^[40] reviewed various gasification methods, emphasizing technological progress without extensively addressing detailed techno-economic scenarios, lifecycle impacts, or socioeconomic implications. Recent reviews by Ignat et al.^[41] and Kaloudas et al.^[21] provided insights into land-use conflicts and socio-environmental challenges but lacked comprehensive techno-economic modeling and LCA integration. A comparison has been made with the recent review papers, as given in Table 2. Table 2 benchmarks prior reviews across six lenses: gaseous fuels, integrated TEA, integrated LCA, TRL, socioeconomic, and regional feedstocks, and added a final column (key limitations) to make gaps explicit.

This review fills these gaps by presenting an extensive comparative analysis that includes:

- Robust integration of TEA and LCA methodologies across multiple gaseous biofuel production routes.
- Detailed analyses of economic scenarios under varying carbon pricing schemes.
- Comprehensive assessment of TRLs and commercialization prospects for biomass-to-gas technologies.
- In-depth exploration of socioeconomic implications, including labor conditions, community impacts, and food-vs-fuel debates.
- Consideration of regional variability, specifically addressing moisture and ash content impacts in tropical and arid zones.

This review goes beyond prior summaries by providing a decision-oriented synthesis that jointly treats TEA, LCA, TRL, socioeconomic, and regional feedstock constraints for thermochemical routes to syngas, H₂, and CH₄. This holistic approach not only helps inform better decision-making but also emphasizes the significance of these innovations in supporting the global energy transition. Incorporating TEA and LCA into biomass biofuel production processes provides a clear path toward more sustainable energy

Table 2 Comparative summary with recent review papers relevant to biomass thermochemical conversion

Review study	Gaseous fuels	Integrated TEA	Integrated LCA	TRL analysis	Socioeconomic analysis	Regional feedstock consideration	Key limitations
Das et al. ^[36]	Syngas	Partial	No	No	No	No	No integrated TEA + LCA; no TRL/socioeconomics.
Lee et al. ^[35]	Syngas	No	No	No	No	No	Lacks TEA/LCA synthesis and deployment context.
Arregi et al. ^[38]	Hydrogen	Partial	Partial	Limited	No	No	Partial TEA/LCA with pre-2020 datasets; limited TRL mapping; excludes SNG.
Patel et al. ^[39]	Syngas, hydrogen	Partial	Yes	No	No	Limited	Mixed system boundaries; no TRL analysis, no regional feedstock economics.
Kumar et al. ^[40]	Syngas	Partial	Partial	No	No	No	Absent TRL and socioeconomic lenses.
Ignat et al. ^[41]	Bioenergy (general)	No	Yes	No	Yes	Yes	Not a thermochemical-process review; no TEA.
Kaloudas et al. ^[21]	Bioenergy (general)	No	Partial	No	Partial	Yes	Limited LCA depth and no TEA integration.
This review	Syngas, hydrogen, methane	Yes	Yes	Comprehensive	Yes	Comprehensive	Thermochemical-to-gas focus with harmonized TEA/LCA, integrated TRL and socioeconomic/regional lenses.

solutions. A comprehensive study illustrating the relationship between biomass-based gaseous fuels and the energy transition can further enhance the understanding of these complex dynamics. Such a study can serve as a tool to communicate the importance of these biofuels in reducing carbon emissions and enhancing energy security, aligning with global sustainability objectives.

Preliminary considerations related to biomass supply chain and their sustainability

Expanding biomass supply chains can significantly influence socio-economic dynamics and alter land-use patterns, particularly when transitioning agricultural lands from food production to bioenergy crops. One critical concern is the well-documented food-vs-fuel debate, which arises when fertile land traditionally used for cultivating food crops is redirected toward biomass production for energy purposes. Recent studies have raised substantial concerns about potential negative implications for food availability, food prices, and nutritional security, especially in vulnerable regions already facing food shortages^[42]. This competition can exacerbate food insecurity by driving up prices and limiting access to essential crops, underscoring the importance of strategic planning to balance bioenergy development with food security objectives.

Moreover, biomass energy supply chains can influence local and regional labor markets. Bioenergy projects have the potential to create numerous employment opportunities in agriculture, harvesting, transport logistics, processing, and distribution. However, these opportunities are frequently seasonal, characterized by low wages and often precarious working conditions, unless supported by robust labor standards and protective regulations. Recent analyses emphasize that meaningful socioeconomic benefits from biomass production require policy frameworks to secure fair labor conditions, adequate income, and improved livelihoods, particularly in rural and economically disadvantaged areas^[43].

Land-use changes driven by biomass expansion pose additional sustainability risks. Converting forests, grasslands, and other ecosystems into energy crop plantations can have profound ecological impacts, including biodiversity loss, soil erosion, nutrient depletion, and altered water cycles. Recent literature emphasizes that intensive biomass cultivation without proper safeguards may lead to deforestation and habitat destruction, undermining long-term ecological and climate benefits^[44]. Sustainable land-use strategies such as agroforestry, integrated crop–livestock systems, and the use of marginal or degraded lands are recommended to mitigate these impacts. Policymakers and industry stakeholders are increasingly encouraged to adopt holistic, landscape-level planning and sustainability certification schemes that balance bioenergy production with ecosystem conservation and food production objectives.

Incorporating comprehensive socioeconomic and environmental assessments within biomass supply chain planning and development is thus crucial. Such assessments ensure balanced trade-offs, promote sustainable agricultural practices, safeguard community livelihoods, and ultimately support equitable and environmentally sustainable bioenergy transitions.

Cross-study differences in functional unit (e.g., per MJ-LHV vs per Nm³-CH₄), system boundary (gate-to-gate vs cradle-to-grave; treatment of biogenic CO₂, land-use change), co-product handling (allocation vs system expansion), LCIA method (e.g., ReCiPe2016 vs TRACI 2.1), and data/temporal representativeness (electricity mixes, background databases) can shift absolute and relative results, limiting comparability and threatening both internal (method

consistency) and external (transferability) validity^[45]. To mitigate this, the approach: (i) tag each study's functional unit (FU), boundary, LCIA method, and data year; (ii) normalize TEA figures to a common currency year and finance/scale assumptions by referencing established frameworks (Zimmermann TEA/LCA guideline; DOE H2A; NREL TEA practice); and (iii) report ranges with explicit method notes where harmonization is not possible^[46]. Prior harmonization efforts show that aligning such assumptions materially reduces unexplained variance, enhancing the decision usefulness of synthesized results.

Syngas production from biomass

The market for syngas as an intermediate in the chemical industry is anticipated to increase as a precursor to bulk chemicals, including methanol and biofuels from the Fischer–Tropsch process^[47]. Biomass-derived syngas is primarily obtained through gasification. This process involves subjecting biomass to high temperatures (typically 700–1,200 °C) under limited oxygen or air conditions. Gasifying high-carbon-content solids like biomass produces synthesis gas, mainly composed of H₂, CO, CO₂, CH₄, water vapor, N₂, and undesirable tars as impurities^[48]. High-quality syngas is characterized by a low tar content, a high H₂ content, and a low nitrogen concentration.

Various biomass feedstocks, including wood, agricultural residues, municipal solid waste (MSW), and energy crops like switchgrass or miscanthus, can be utilized for syngas production. Before gasification, biomass is typically dried and ground into small particles. The syngas production capacities of different feedstocks are illustrated in Fig. 2^[7]. As shown, coal exhibits the highest syngas production capacity, exceeding 35,000 MWh, whereas petcoke and biomass/waste yield the lowest amounts.

Inside the gasifier, biomass undergoes a series of chemical reactions to produce syngas. Biomass-derived syngas offers significant advantages over fossil fuel-based methods, including reduced reliance on non-renewable resources and lower GHG emissions. It plays a crucial role in power generation through gas turbines, fuel cells, and steam turbines. Additionally, syngas serves as a key feedstock for producing H₂ and various chemicals, such as urea, ammonia, methanol, dimethyl ether, and Fischer–Tropsch diesel, reinforcing its economic importance^[49]. Beyond energy production, utilizing biomass feedstocks supports local agriculture and forestry industries, fostering economic growth within communities. The

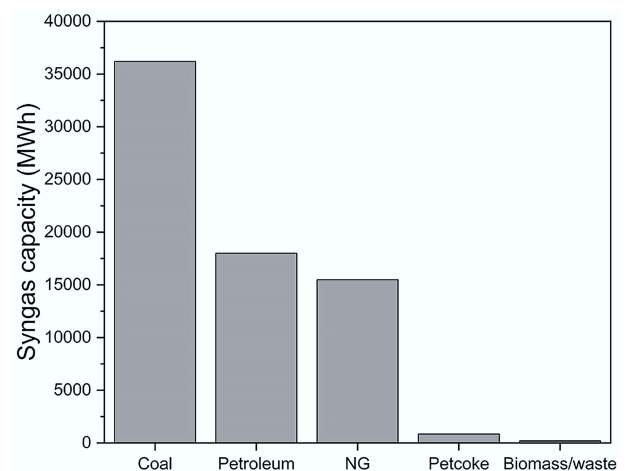


Fig. 2 Syngas production capacities of various feedstocks. Redraw based on the data from Ahmad et al. ^[7].

quality and yield of syngas are critical in determining its practical applications. Several factors influence its composition, including gasifier type, operating conditions, pressure, space velocity, gasifying agents, feedstock properties, particle size, and catalyst efficiency^[48]. Optimizing these parameters is essential for producing high-quality syngas with minimal contaminants, such as tar and nitrogen, while maximizing H₂ content. Advances in gasification technologies continue to enhance efficiency, solidifying syngas as a cornerstone of sustainable energy and chemical production.

Techno-economic analysis of bio-based syngas

The TEA of syngas, bio-based H₂, and bio-based methane production from biomass typically involves the following steps, as listed in Table 3.

The successful commercialization of biomass thermochemical conversion technologies is heavily influenced by their current TRLs, which provide a standardized scale to gauge technological maturity. These levels range from TRL 1 (basic research) to TRL 9 (fully commercial systems). For biomass-based gaseous fuel systems, most technologies operate within the TRL 3–8 range, with only a few reaching sustained commercial viability, as listed in Table 4.

The configuration of biomass conversion systems, whether centralized or decentralized, plays a critical role in the economic and environmental performance of biofuel production. Logistics—including feedstock collection, transportation, storage, and pre-processing—account for a substantial share of both the cost and emissions associated with biomass-based systems^[57]. Therefore, the system layout significantly influences the feasibility of thermochemical conversion technologies and applies broadly to all biomass-to-gas systems.

In recent years, numerous studies have focused on developing advanced technologies to enhance the utilization of renewable energy sources in response to climate change and the corresponding policies aimed at its mitigation. Biomass gasification is a promising pathway for producing energy, chemicals, and H₂, offering a sustainable alternative to fossil-fuel-based processes. However, evaluating the TEA of these systems is critical, as multiple factors influence economic viability and energy efficiency. These factors include biomass quality, feedstock transportation, process efficiency, operational costs, and market conditions^[58].

Colantoni et al. conducted a financial feasibility analysis of biomass-based combined heat and power (CHP) systems at three different scales: 100 kWth, 1 MWth, and 10 MWth. This study used a bubbling fluidized bed reactor, and the feedstock comprised various biomass types. Indicators such as Net Present Value (NPV), Internal Rate of Return (IRR), and Pay Back Period (PBP) were utilized in an economic feasibility analysis. The sensitivity of NPV was also compared through a risk analysis using the Monte Carlo Simulation. It was found that the most influential economic model parameters for sensitivity analysis were the biomass cost, the amount of synthesis gas, and the price of electricity sold. The probability of a system having a positive NPV ranged from 66% to 90%, and it increased with the size of the system. It has been established that using regionally procured biomass as a raw material and acquiring an energy green certificate from the resultant syngas would qualify the undertaking as a triumph^[59].

Catalyst deactivation is a critical challenge in biomass thermochemical conversion, directly affecting system performance and economics. Common mechanisms include coke deposition, sintering, and poisoning from sulfur, chlorine, or alkali metals in

Table 3 A summary of parameters need to be considered for conducting techno-economic analysis of syngas, bio-based H₂, and bio-based methane production from biomass

Step	Syngas	Bio-based hydrogen	Bio-based methane	Comparison	Ref.
Biomass feedstock characterization	Moisture content, ash content, and heating value	Moisture content, ash content, and heating value	Moisture content, ash content, and heating value	Similar	[50–52]
Process design	Gasification: Feedstock properties and the desired syngas composition, gasifier type, operating conditions, and gas cleaning methods	Gasification process design: feedstock properties, gasifier type, operating conditions, gas cleaning, H ₂ separation	Drying, pyrolysis, and gasification: feedstock properties, gasifier type, operating conditions, gas cleaning	Key difference: drying for methane; H ₂ separation for H ₂	[50]
Product gas composition analysis	Analyzed to determine its suitability for downstream applications	Analyzed for H ₂ purity and downstream applications	Analyzed for downstream applications	Similar, with H ₂ requiring additional purity analysis	[50]
Capital cost estimation	Based on the process design, equipment specifications, and installation costs	Based on process design, equipment, H ₂ separation unit, installation costs	Based on process design, equipment, installation costs	Similar, with H ₂ including additional costs for H ₂ separation	[50]
Operating cost estimation	Feedstock costs, energy costs, and maintenance costs	Feedstock, energy, H ₂ separation, maintenance costs	Feedstock, energy, maintenance costs	Similar, with H ₂ including H ₂ separation costs	[50]
Revenue estimation	From the sale of the syngas or downstream products	From bio-based H ₂ or downstream product sales	From bio-based methane or downstream product sales	Similar	[50]
Sensitivity analysis	Evaluate the impact of changes in key parameters, such as feedstock prices and product prices, on the economic viability of the process.	Evaluates impact of feedstock and product price changes on viability	Evaluates impact of feedstock and product price changes on viability	Similar	[50]

Table 4 Technology readiness levels (TRL) of the technologies for producing biomass-based gaseous fuels

Technology	Fuel type	Current TRL	Key barrier	Estimated commercialization timeline	Ref.
Bubbling fluidized bed gasifier	Syngas	7–8	Tar control, catalyst degradation	3–5 years	[53]
Steam reforming of bio-oil	H ₂	5–6	Catalyst cost, scalability	5–8 years	[38]
Sorption-enhanced gasification	H ₂	4–5	Process integration, CO ₂ handling	8–10 years	[54]
Supercritical water gasification (SCWG)	Syngas/H ₂	4–5	High pressure equipment cost, limited demo data	8–12 years	[55]
Biomass methanation	Methane	6–7	Ni-based catalyst deactivation, cost estimating	5–7 years	[56]

feedstocks. Nickel-based catalysts, widely used for reforming and methanation, are particularly susceptible to carbon deposition, requiring regular regeneration and impacting operating costs^[60]. Additionally, the reliance on rare or precious metals such as cobalt, rhodium, or ruthenium in advanced catalyst systems raises concerns about resource availability, supply chain risks, and increased capital expenditures^[61]. Research is thus focusing on developing robust, earth-abundant alternatives and strategies to prolong catalyst life, such as doped supports and periodic oxidative regeneration. Comprehensive TEA should incorporate catalyst replacement intervals, regeneration costs, and market volatility of rare metals to accurately assess process sustainability.

Sarafraz et al.^[62] investigated the economic feasibility of a chemical looping gasification system using liquid indium as an oxygen carrier for syngas production. A TEA was conducted to evaluate cost-effectiveness and levelized energy costs under different pricing scenarios based on real-world market indices. The study analyzed a system capable of processing 110 t/d of carbon feedstock, optimizing process parameters to achieve a syngas quality score of approximately 0.5. The cost breakdown for the chemical looping gasification process with liquid metal oxide carriers (CLG-LMOC) is presented in Fig. 3^[62]. It was determined that liquid metal handling represented a significant cost component, accounting for 49% of total equipment cost. Furthermore, fuel costs comprised 57.51% of the total annual cost, while equipment operation accounted for 40%.

The cost breakdown shown in Fig. 3 is derived from a specific case study by Sarafraz et al.^[62], which analyzed a chemical looping gasification system using a liquid medium as an oxygen carrier. It reflects the economic conditions, market indices, and operational factors particular to the studied region. Although the distribution of cost components, such as liquid metal handling (49%) and reactor operations (18%) offers valuable insights, it may not be universally applicable to regions with differing market conditions or feedstock prices. Variables like local energy costs, labor expenses, raw material availability, and regional regulations can significantly affect the cost structure. Therefore, while this breakdown is informative, it should not be broadly generalized without considering local contexts.

These findings underscore the importance of optimizing process conditions and reducing high-cost elements to improve the economic feasibility of biomass gasification. Integrating advanced gasification techniques and policy incentives, such as carbon credits and renewable energy subsidies, could further enhance the viability of biomass-based syngas production systems.

The supercritical water gasification (SCWG) method has received much attention in recent years due to its high energy conversion efficiency and environmental benefits. Meanwhile, the SCWG does not require a separate drying stage, saving cost and space. Additional economic evaluation is necessary to encourage the widespread development and commercialization of SCWG. In 1999, Amos refined the syngas produced at the starch waste SCWG plant using a complex membrane purification device^[63]. The economic assessment found that the membrane unit accounted for over 35% of the total equipment cost. Table 5 provides an economic assessment of syngas production via SCWG.

Brandenberger et al. investigated the production of synthetic natural gas (SNG) via microalgal SCWG^[55]. Their findings indicated that feed concentration was the most influential factor affecting SNG production costs. Under optimistic hypothetical conditions, where the SCWG plant had a microalgae treatment capacity of 86,500 t/d, the estimated cost range for SNG was US\$79–US\$129 /GJ. However, despite these advancements, the cost of SNG remains higher than that of conventional natural gas, limiting its current economic feasibility^[64].

Several gasification technologies are employed for syngas production from biomass, but only the double fluidized bed (DFB) steam gasification technology has reached commercial-scale operation. Although extensive research and demonstration projects have been conducted, no full-scale commercial plants are currently operational. Numerous demonstration projects are in progress or in the planning phase, including GoBiGas, BioTfuel, Stracel BTL, Ajos BTL, Woodspirit, Enerkem's ethanol demonstration plant, and the TIGAS project^[65]. These projects utilize different gasification technologies to produce various products, including liquid and gaseous fuels such as BioSNG and H₂.

Plasma gasification exhibits considerable promise for syngas production from biomass. Ramos & Rouboa^[50] reported a net energy output of 816 kWh/t of biomass, with conversion efficiencies ranging from 20% to 45%, substantially higher than the 2.7% efficiency of conventional gasification^[66]. Additionally, the technology achieves a mass reduction rate of 90 wt.% and generates an annual revenue of approximately US\$3.2 million, demonstrating its economic feasibility for syngas production^[66].

One of the key advantages of these gasification technologies is their high conversion efficiency, which can reach up to 70%^[65]. However, challenges remain, particularly regarding H₂ production, which requires further infrastructure development. While the

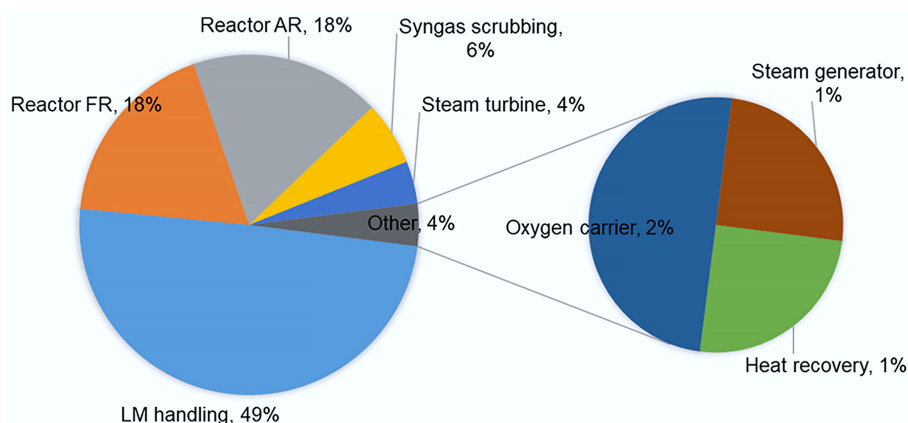


Fig. 3 Price breakdown for syngas production by chemical looping gasification process with liquid metal oxide carriers (CLG-LMOC). Redraw based on the data from Sarafraz & Christo^[63].

Table 5 Economic analysis of various SCWG processes for syngas production

Year	Category	Targeted product	Indicator	Feedstock	Capacity	Result	Ref.
2011	Fixed capital investment: US\$53.4 million ; US\$TCI: 64.06 million	CH ₄ and H ₂	Annual net income	Waste sludge	481 kg/h H ₂	Annual profit will be highest at US\$3.78 /kg H ₂ selling price	[67]
2012	Construction cost: US\$16,169 /ha; Labor cost: US\$30,787 /ha/yr; TPC: US\$110,270 /ha/yr	Syngas	Syngas production cost	Microalgae	86,500 t/d	Updated syngas cost: US\$79–129 /GJ	[55]
2014	Indirect cost, O.C., Depreciation cost	Syngas	Break-even prices for syngas, electricity	Sugarcane Bio-refinery residues	1 kg/h syngas yield	The break-even syngas price is lower than US\$32.40 /MWh is profitable	[68]

transportation sector is gradually transitioning toward electric vehicles and H₂ fuel, widespread adoption will take decades. As a result, hydrocarbons are expected to remain the dominant fuel source for the foreseeable future. Despite previous setbacks and industry failures, it is crucial to further develop syngas production technologies to reduce costs and improve economic viability.

Life-cycle assessment of bio-based syngas

The LCA of bio-based syngas production offers an in-depth analysis of its environmental impacts, focusing on critical sustainability indicators such as GHG emissions, acidification potential, eutrophication potential, and water usage. A detailed LCA evaluates the environmental consequences of syngas production across its entire life-cycle, encompassing biomass cultivation, harvesting, gasification, purification, and end-of-life waste management. The environmental performance of bio-based syngas is shaped by multiple factors, including the type of biomass feedstock, energy requirements, gasification technology, and overall process efficiency. By pinpointing environmental hotspots through LCA, opportunities for improvement can be identified, such as increasing energy efficiency, adopting carbon capture technologies, and sourcing biomass sustainably. Additionally, a comparative analysis between bio-based and fossil-derived syngas highlights the former's potential benefits, particularly in reducing carbon emissions and enhancing overall environmental sustainability. Performing an LCA for bio-based syngas production yields essential insights for policymakers, researchers, and industry stakeholders, supporting the shift toward more sustainable and eco-friendly energy systems. The LCA is typically

divided into the following stages, as listed in Table 6.

Syngas, which is H₂-rich, is considered one of the cleanest energy sources, producing the fewest GHGs. Several studies have investigated the environmental impact of producing H₂-rich syngas from various biomass types^[69]. Biomass pyrolysis produces the highest CO₂ equivalent emissions among the thermo-catalytic processes for producing H₂-rich syngas^[70]. Yet, due to variations in machinery, process conditions, and feedstocks, it is impossible to compare the environmental impact of these various processes directly. According to Dufour & Moreno, the CO₂ equivalent emissions can be decreased by combining the water-gas-shift reaction with the reforming process^[71].

Carpentietti et al.^[73] studied the LCA of an integrated biomass gasification combined cycle (IBGCC) for the production of syngas. The LCA demonstrates the significant environmental benefits of biomass utilization, including mitigating GHG emissions and preserving natural resources. With a fixed CO₂ removal efficiency of 80%, modelling an IBGCC + DeCO₂ yielded an intriguing 33.94% cycle efficiency and specific CO₂ emissions of 178 kg CO₂/MWh. Due to the low efficiency of the IBGCC + DeCO₂ and the significant impact of energy crop cultivation, the results for the other indicators indicate values that are slightly higher than the ICGCC + DeCO₂^[73]. For system-scale LCA, modeled BECCS yields ~850–900 kWh per tCO₂ captured, while DAC requires ~350–600 kWh and ~5.4–7.1 GJ heat per tCO₂; net-negative cases imply ~0.3–1.1 GtCO₂/yr storage (–0.85) and ~4 GtCO₂/yr (–3.9) in 2050 EU scenarios^[74].

Table 6 A summary of LCA steps of syngas, bio-based H₂, and bio-based methane production from biomass thermochemical conversion

LCA step	Syngas	Bio-based hydrogen	Bio-based methane	Comparison/note	Ref.
Biomass feedstock acquisition and preprocessing	Land, water, and energy use for growth, harvesting, transport, drying; GHG and biodiversity impacts	As syngas; effects depend on H ₂ pathway selected (gasification, steam reforming)	As syngas; for biogas/ biomethane, includes anaerobic digestion of waste or crops	All rely on sustainable sourcing and transport minimization; cropping practice crucial	[72]
Conversion/ process stage	Gasification emissions (CO ₂ , CO, tars, particulates); electricity/fuel use	Gasification plus water-gas shift, H ₂ separation (membranes, PSA); added energy and chemicals	Anaerobic digestion/ followed by upgrading and possible methanation; methane slip and biogenic CO ₂	H ₂ route has higher process emissions and energy use; methane route increases risk of fugitive CH ₄ emissions	[72]
Product gas upgrading/ cleaning	Acid gas removal (CO ₂ , H ₂ S), tar cleanup, waste disposal impacts	H ₂ purification to fuel cell or pipeline standards; impacts from separation units	Upgrading biogas to biomethane purity (> 95% CH ₄); methane slip is critical LCA factor	All require energy-intensive cleanup; H ₂ and biomethane purity requirements drive additional impacts	[72]
Distribution and use	Pipeline or local use; GHG savings depend on substitution (e.g., replacing fossil syngas)	Similar; GHG impact determined by end use (fuel, chemical); negative emissions possible with carbon capture and storage (CCS)	Grid injection or CNG; methane leakage and efficiency affect net GHG savings	Biogenic routes generally yield lower GHG than fossil, but only if methane slip and H ₂ purification are managed efficiently	[72]
End-of-life/waste management	Ash, char, tar reuse/disposal, water effluents; possible recycling or reuse of byproducts	Similar, plus wastes from H ₂ separation materials	Digestate use in agriculture, residual CO ₂ streams from upgrading	H ₂ and methane pathways introduce separation wastes; all routes can benefit from optimal byproduct valorization	[72]
Overall GHG and environmental performance (summary)	Significant GHG reduction vs fossil syngas, especially when using bio-waste; some trade-offs in land/water use	H ₂ from biomass + CCS can be net negative GHG; LCA depends on full-system boundaries	Biomethane can achieve deep decarbonization if methane slip minimized and digestate reused	Best LCA results from waste-based feedstocks, strong methane management, CCS integration for negative emissions	[72]

The environmental impact of syngas production through air, steam, and CO₂-enhanced gasification was analyzed by Parvez et al.^[75]. The study showed that CO₂-enhanced gasification had fewer adverse environmental effects than traditional gasification. When considering the environmental impact of a process, CO₂ emissions are typically a primary concern. While CO₂-enhanced gasification had a lower energy footprint than conventional gasification, it resulted in larger consequences in the middle-ground category, particularly in terms of human toxicity and marine ecotoxicity. As shown in Fig. 4, conventional biomass gasification had a greater effect on resource consumption, whereas its impact on human health and ecosystems was less significant^[75].

Ramos & Rouboa^[50] underscore the potential of plasma gasification for syngas production from biomass, highlighting its environmental and economic advantages through a life cycle thinking (LCT) approach that encompasses LCA, life-cycle costing (LCC), and social life-cycle assessment (S-LCA). From an LCA standpoint, plasma gasification of biomass yields a global warming potential (GWP) ranging from −31 to 422 kg CO₂ equ., which is comparable to conventional gasification (27 to 104 kg CO₂ equ.) and pyrolysis (−1 to 151 kg CO₂ equ.)^[76].

Shen et al. measured particulate matter (PM) emissions in CO₂-enhanced biomass gasification, finding a 75.4% reduction in PM emissions at a 15% CO₂ addition^[77]. An environmental investigation using Aspen Plus software also revealed that CO₂-enhanced biomass gasification reduced environmental impacts compared to traditional biomass gasification, especially regarding human toxicity and ecotoxicity^[75]. Gu & Bergman^[78] conducted an LCA of GHG emissions from electricity generated by syngas produced from woody biomass. Their study found that the conversion of woody biomass into medium-energy syngas in a high-temperature, low-oxygen environment, followed by combustion to produce electricity, had a significantly lower global warming potential than energy from bituminous coal (1.08 kg CO₂-eq/kWh) or conventional natural gas (0.72 kg CO₂-eq/kWh), with a global warming impact value of just 0.142 kg CO₂-eq/kWh^[78].

Voultsos et al. assessed the proposed cogeneration biomass gasification facility in Thessaly, Greece, for its energetic and environmental performance using a combination of process modelling and the LCA technique. When the gasification model was expanded to a 1 MW_{el} and 2.25 MW_{th} CHP facility, its Global Warming Potential

(GWP) and Cumulative Demand for Non-Renewable Fossil Energy were analyzed as part of a 'cradle-to-gate' LCA. Plant operation was found to lower GHG emissions by around 0.6 kg CO₂-eq/kWh_{el} and save roughly 10 MJ/kWh_{el} of non-renewable energy under all test conditions^[79].

Integrating LCA with LCC analysis for bio-based syngas production enables a holistic evaluation, balancing environmental impacts like GHG emissions with economic costs, ensuring sustainable and cost-effective energy solutions. The LCC analysis of thermochemical syngas production from biomass provides a comprehensive economic assessment of this renewable energy process, covering feedstock acquisition, plant construction, operation, and eventual decommissioning. Thermochemical syngas production primarily involves biomass gasification, where lignocellulosic materials such as forestry residues, agricultural wastes, or energy crops are converted into a gaseous mixture of CO, H₂, and CO₂ at high temperatures (typically 700–1,000 °C)^[80]. Capital costs are a major component of the LCC, with gasification facilities requiring investments of US\$500–US\$1,500 per kW of installed capacity, depending on the gasifier type (e.g., updraft, downdraft, or fluidized-bed), plant scale, and ancillary systems such as gas cleaning and heat recovery units^[81]. Feedstock costs dominate the LCC, ranging from US\$30 to US\$100 per dry ton, accounting for 50%–70% of total expenses due to harvesting, transportation, and preprocessing needs such as drying and grinding^[82]. Operational and maintenance (O&M) costs contribute an additional 10%–20% to the LCC, driven by energy inputs for gasification (often 15%–25% of total energy demand), gasifier maintenance, and the replacement of tar-reforming catalysts, which can cost US\$5–US\$15 per kg^[83]. Environmental factors, including ash disposal and potential carbon credits, also influence the LCC, with a carbon price of US\$20–US\$50 per ton of CO₂-equ. potentially yielding savings of US\$0.02–US\$0.10 per m³ of syngas through emissions offsets^[84]. TEA and LCA comparison of different technologies for syngas production is given in Table 7.

Across studies, levelized costs pivot on feedstock logistics and gas cleanup, while LCA swings with electricity mix and methane/tar management. CCS and waste-based feedstocks frequently flip GWP from positive to near-neutral/negative. At TRL 7–8 (indirect steam gasification), near-term wins lie in tar control and heat integration; policy levers (e.g., carbon price, renewable gas credits) strongly affect bankability. Decision-relevant range: syngas GWP improves most when the cleanup energy is low-carbon and when co-products (biochar) are valorized.

The results of the LCA and LCC can be used to identify areas where improvements can be made to reduce the environmental impact of syngas production from biomass. For example, the LCA may identify opportunities to reduce energy consumption, switch to renewable energy sources, or improve waste management practices. Overall, the LCA of syngas production from biomass provides essential information for decision-makers, stakeholders, and investors to evaluate the environmental sustainability of the process and make informed decisions about its implementation. Hence, enhancing the production process is a viable option for reducing CO₂ equivalent emissions.

Hydrogen production from biomass

The development of sustainable fuels is critical for addressing the global challenges of climate change, energy security, and transitioning to a low-carbon economy. H₂ is widely considered a highly efficient and environmentally friendly energy carrier because only water is produced from H₂ combustion. It is a carbon-free energy carrier and

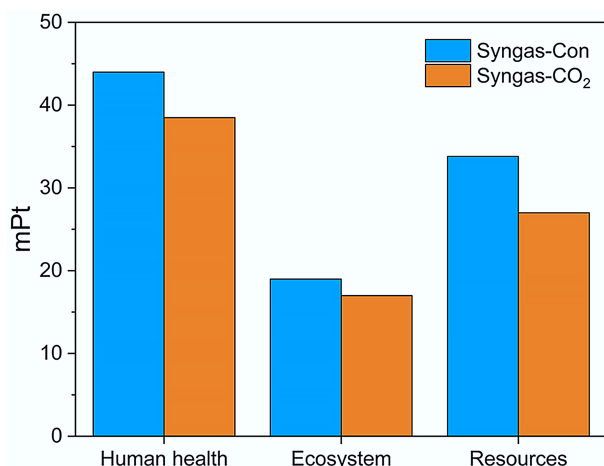


Fig. 4 Environmental impact caused-conventional biomass gasification (Syngas-Con) and CO₂-enhanced biomass gasification (Syngas-CO₂). Redraw based on the data from Parvez et al.^[75].

Table 7 Comparison of syngas production cost and GWP for different technologies

Process type	Feedstock/context	Syngas production cost (US\$/GJ)	GWP (kg CO ₂ -eq per kg syngas)	Ref.
Indirect steam DFB gasification	Woody biomass	–	~2–5 depending on electricity GWI	[85]
Stand-alone biomass syngas plant	Lignocellulosic biomass	8.22–6.73	–	[86]
Pulp-mill integrated biomass gasification	Forest residues	17	–	[87]
Mill-gas separation (COG H ₂ + BOFG CO) to syngas	Steel mill off-gases	–	0.7–3.6 (pathway and electricity carbon intensity dependent)	[88]
Micro-scale biomass gasification	Various residues	5–54	–	[89]

has the highest known energy density among common fuels, at 142 kJ/gal^[90]. H₂ energy has the potential to decarbonize several sectors, including industry, transportation, and energy storage. Worldwide, H₂ production might reach 10 EJ/year in 2050, up from 7.7 EJ/year in 2017^[91]. Figure 5 shows the primary application regions of H₂, which include China (29%), North America (17%), the Middle East (13%), and others (42%)^[92]. Furthermore, the H₂ industry is expected to grow at an annual rate of 5%–10% in the coming years, primarily due to its use in oil refineries for processing heavy oil fractions and its anticipated role in the transportation sector or as an energy carrier^[93]. Currently, 96% of the produced H₂ is based on non-renewable resources^[94]. Natural gas (62%) and oil reforming (0.5%) are the most common methods, followed by coal gasification (21%). According to Fig. 5, the production of H₂ through water electrolysis accounts for a mere 0.4%^[92].


Biomass is emerging as a promising sustainable feedstock for H₂ production, harnessing thermochemical processes such as steam gasification, supercritical steam gasification, bio-oil reforming, and pyrolysis^[38]. Globally, approximately 181.5 billion tons of lignocellulosic and agricultural biomass are produced; however, a minor proportion of this biomass undergoes processing and repurposing, resulting in substantial quantities of organic waste (equivalent to 40%–50% of its initial mass) being deposited into the environment^[95]. Today's food systems result in massive volumes of wasted food; the United States (U.S.) alone produces over 50 Mt of food waste per year^[96]. Employing renewable biomass materials in H₂ production mitigates their inherent uncontrolled decomposition and the environmental risk of climate change^[97]. This approach aligns with broader trends in sustainable fuel development, where bio-based H₂ is increasingly seen as a crucial component in achieving a net-zero future. By linking biomass conversion technologies to the H₂ economy, this paper offers insights into how sustainable fuels can play a pivotal role in the broader energy transition.

Importance of bio-based hydrogen

The thermochemical conversion of biomass offers a sustainable and carbon-neutral method for H₂ production, tackling two significant issues: decreasing reliance on fossil fuels and reducing GHG emissions. The production of H₂ from biomass presents a promising avenue for reducing carbon emissions in sectors that are challenging to electrify, including heavy industry and long-distance transport. The incorporation of H₂ into energy systems plays a vital role in achieving the ambitious climate goals established by international accords like the Paris Agreement, which seeks to restrict global warming to 1.5 °C. In this context, the capacity of biomass conversion technologies to produce low-carbon H₂ via sustainable methods emerges as a crucial element of future energy systems^[98].

The global shift towards an H₂ economy is accelerating, particularly with Europe at the forefront of this movement. The H₂ strategy of the European Union, especially within the framework of the RePowerEU plan, presents a detailed roadmap aimed at deploying 40 GW of electrolyzers by 2030 for the production of renewable H₂, emphasizing the integration of H₂ across multiple sectors^[99]. Nonetheless, a significant challenge in the production of green H₂ through electrolysis is the reliance on renewable electricity, which may not consistently be accessible in adequate amounts. H₂ production from biomass presents a valuable approach by utilizing a renewable feedstock that can function autonomously or alongside renewable electricity, thereby guaranteeing a consistent H₂ supply. Furthermore, integrating biomass conversion with carbon capture and storage technologies can significantly improve its environmental impact, facilitating negative emissions and aiding in the achievement of net-zero objectives^[100].

The environmental advantages of biomass-derived H₂ production are significant, especially in contrast to traditional H₂ production techniques. The conventional method of producing H₂, mainly via steam methane reforming (SMR) of natural gas, leads to considerable CO₂ emissions. Conversely, thermochemical processes

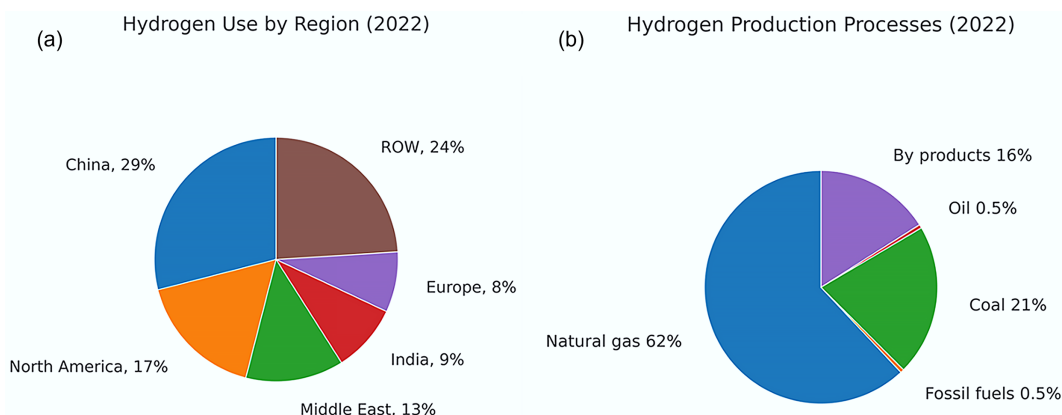**Fig. 5** (a) Major application regions, and (b) production processes of H₂ in 2022. Redraw based on the data from IEA^[93].

utilizing biomass, especially when combined with carbon capture and storage, can lead to a net decrease in CO₂ emissions, thereby rendering H₂ produced from biomass carbon-negative^[101]. This holds particular significance in the realm of challenging sectors like cement, steel, and chemicals, where H₂ can serve as a substitute for fossil fuels, thereby diminishing their carbon emissions. In the industrial sector, H₂ is becoming a crucial tool for decarbonization, and biomass conversion is poised to significantly contribute to fulfilling the H₂ needs of these industries^[102].

The significance of H₂ in the transportation sector is growing, especially for applications where battery-electric solutions prove impractical, including long-haul trucking, shipping, and aviation. Hydrogen fuel cells, utilizing H₂ derived from biomass, offer a zero-emissions alternative to diesel engines in these sectors, contributing to global initiatives aimed at lowering transport emissions^[103]. Studies indicate that hydrogen fuel cells provide greater energy density and range than battery-electric options, rendering them more appropriate for heavy-duty and long-range uses. Additionally, H₂ produced from biomass can be incorporated into current infrastructure, minimizing the necessity for expensive new energy systems^[101].

A notable benefit of biomass-based H₂ production is its potential for implementation in areas where renewable energy sources such as wind and solar are scarce. Biomass is abundantly accessible in numerous regions globally, presenting a compelling opportunity for decentralized H₂ production, especially in rural and agricultural areas. This approach can strengthen energy security by decreasing reliance on imported fossil fuels and ensuring a consistent, locally sourced energy supply. Furthermore, the production of H₂ from biomass has the potential to enhance rural economic development by establishing new markets for agricultural residues and various organic waste materials^[102]. This method promotes a circular economy by transforming waste into valuable energy resources, which is in line with global sustainability objectives.

From an economic standpoint, the viability of converting biomass through thermochemical processes into H₂ is gaining significant competitiveness. The review emphasizes that advancements in thermochemical processes, including enhancements in gasification efficiency and the incorporation of carbon capture and storage (CCS), are reducing the costs associated with H₂ production from biomass^[1]. When external factors like carbon pricing and environmental benefits are taken into account, biomass-based H₂ demonstrates the potential to compete with alternative H₂ production methods, such as electrolysis. Furthermore, the advancement of hybrid systems that integrate biomass conversion with renewable energy sources has the potential to significantly improve the cost-effectiveness and sustainability of H₂ production^[104].

The incorporation of H₂ into the broader energy framework, especially via power-to-H₂-to-power systems, presents a noteworthy opportunity for H₂ derived from biomass. In these systems, surplus renewable electricity is utilized to produce H₂ via electrolysis, allowing for storage and subsequent conversion back into electricity during periods of low renewable production. H₂ derived from biomass can enhance this strategy by offering a consistent supply that remains unaffected by weather variability, thereby ensuring the reliability and stability of the energy system^[98]. The adaptability of biomass-derived H₂ positions it as a significant resource for stabilizing variable renewable energy sources such as wind and solar.

As progress continues, the advancement of sustainable fuels, such as H₂, will remain a crucial priority for policymakers, experts, and industries across the globe. The review highlights biomass thermochemical conversion as an essential element of the future H₂

economy. With the increasing scale of H₂ production from renewable sources, biomass is set to be a vital component in supporting various H₂ production methods, thereby contributing to a diverse and robust energy supply^[52]. The ongoing progress in biomass conversion technologies, along with favorable policies and investments, will be crucial for unlocking the full potential of biomass-based H₂ in meeting global decarbonization objectives.

The techno-economic potential for biomass thermochemical conversion into H₂ is gaining competitiveness as a result of technological advancements and improved process efficiency. Considering the implications of carbon pricing and the environmental advantages associated with negative emissions, biomass-derived H₂ emerges as a competitive option against alternative H₂ production techniques, including electrolysis and steam methane reforming with carbon capture and storage^[52]. This production pathway also generates economic opportunities in rural regions, enabling the conversion of agricultural and forestry residues into valuable energy products, thereby fostering economic development and job creation^[101]. This is in accordance with worldwide initiatives aimed at facilitating a fair shift to a low-carbon economy, ensuring that the advantages of clean energy are distributed equitably^[98].

Techno-economic analysis of bio-based hydrogen

The sustainability of the H₂ economy and the future of clean energy hinge on the development of adaptive and environmentally benign methods for H₂ production. As discussed in TEA of bio-based syngas, H₂ production technologies such as steam reforming and sorption-enhanced gasification (SEG) remain in mid-development stages (TRL 4–6), affecting their current economic viability and scalability. The configuration of biomass conversion systems, whether centralized or decentralized, plays a critical role in the economic and environmental performance of bio-based H₂ production, as discussed in a previous section. Traditional H₂ production methods, such as steam methane reforming (SMR) of natural gas and coal gasification, are increasingly unsuitable for a circular economy due to their energy-intensive processes and high carbon emissions, which amount to approximately 830 million tons per year^[105]. As the global demand for H₂ rises, especially in the context of decarbonization strategies, the need for alternative production methods has become pressing. The utilization of renewable resources, particularly organic residual biomasses such as food wastes, lignocellulosic agricultural residues, and forestry waste, offers one of the most promising alternatives to these conventional methods^[106].

For H₂ to be commercially viable as a clean fuel, it is essential that its production methods are both sustainable and cost-competitive. The scalability and processing reliability of bio-based H₂ production are crucial to reducing production costs and driving broader adoption. Several factors contribute to the overall economics of bio-based H₂, including: (a) substrate/feedstock and pretreatment costs, (b) production costs of H₂, (c) downstream purification and processing costs, (d) storage and transportation costs, and (e) distribution costs^[107]. While thermochemical H₂ production technologies such as gasification and pyrolysis are productive and can yield high-purity H₂, they are often not economically viable without significant improvements in energy efficiency due to their high energy consumption^[106].

H₂ commercialization has progressed considerably due to advances in various production technologies. These include water electrolysis, steam reforming, and coal gasification, each of which has been extensively applied in industrial settings^[108]. However, as H₂ production from biomass is explored more extensively, it has been found that the cost of H₂ produced through gasification of

biomass remains relatively high compared to conventional methods. For example, a study by Liu et al. reported that the levelized cost of hydrogen (LCOH) from MSW gasification was US\$3.04/kg, while the cost for waste wood gasification was slightly lower at US\$2.77/kg. This study considered several feedstock scenarios to determine the most economically viable H₂ production option, as detailed in Table 1. However, the LCOH associated with biomass conversion into H₂ was found to be approximately three times higher than conventional MSW gasification methods^[109]. Catalyst deactivation and rare-metal cost considerations previously discussed in the syngas TEA section are also highly relevant here, particularly for steam reforming and water-gas shift reactions.

Further analysis revealed that LCOH for MSW gasification was calculated at GBP 2.22 /kg, and for waste wood gasification, it was GBP 2.02 /kg. This cost disparity underscores the economic challenge faced by biomass-derived H₂. Liu et al. evaluated five different scenarios for H₂ production: (S1) gasification of MSW, (S2) gasification of waste wood, (S3) dark fermentation of wet waste or sludge, (S4) combined dark and photo fermentation of wet waste or sludge, and (S5) steam methane reforming (SMR) of natural gas. Among these, biomass-based H₂ production through gasification (S1 and S2) was more expensive compared to SMR, but dark fermentation (S3) and combined fermentation (S4) showed some potential for reducing costs, particularly when compared to more conventional methods^[109].

The techno-economic feasibility of SEG for H₂ production was also investigated. Santos & Hanak^[54] found that this method led to a higher LCOH of US\$6.3 /kg, significantly higher than the traditional steam gasification process, which had an estimated LCOH of US\$3.402 /kg. The impact of carbon pricing on the economic performance of H₂ production methods was also considered. In the case of SEG, the avoided CO₂ emissions cost was US\$144.77 /tCO₂, assuming no gate fee and tax imposition. However, with the introduction of a carbon pricing mechanism at US\$49.89 /tCO₂, the cost of CO₂ emissions decreased to US\$113.526 /tCO₂^[54]. This finding highlights the sensitivity of biomass-based H₂ economics to carbon pricing, and its potential for further cost reductions as policies to curb emissions are enacted. The impact of gasification temperature on H₂ product yield and process efficiencies is shown in Fig. 6.

The pyrolysis process, another thermochemical method for converting biomass into H₂, also presents an alternative to gasification.

Pyrolysis offers advantages such as lower operating temperatures and the potential for producing valuable byproducts, but like other thermochemical processes, it still faces challenges in terms of cost competitiveness with more established H₂ production methods. The economics of pyrolysis-based H₂ production, while promising, require further investigation and optimization, especially concerning the integration of CCS to mitigate the environmental impact.

However, the production of H₂ via biomass pyrolysis is still in the early stages, with a TRL between 3.5 and 4.2 (laboratory scale). This relatively low TRL reduces production efficiency and increases associated costs^[110]. To enhance the scalability of the process, improving H₂ yields from biomass would be crucial for reducing both capital and operating expenditures.

Capital expenditures (CAPEX) for biomass pyrolysis encompass both direct costs, such as instrumentation, equipment type, installation location, and electrical control systems, as well as indirect costs, which include construction and engineering expenses^[111]. Operating expenditures (OPEX), on the other hand, include variable costs such as biomass feedstock transportation, raw material pricing, chemicals, and energy consumption. Additionally, fixed costs, such as administrative, labor, and maintenance expenses for the pyrolysis plant, must also be considered^[111].

A TEA study on the hydrolysis of woody biomass for biofuel production estimated the minimum fuel selling price (MFSP) at US\$1.64 /kg (in 2007 U.S. dollars), with an annual output of 79 gallons of liquid fuels per ton of lignocellulosic feedstock^[112]. In a similar analysis, the fast pyrolysis of corn stover to produce H₂ yielded a production cost between US\$2.1 and US\$3.09 per kilogram of H₂, with CAPEX at US\$287 million and annual OPEX at US\$109 million. The simulation results also demonstrated a strong correlation between the production cost and the price of biomass feedstock^[113].

H₂ production costs must be below or close to US\$0.3 /kg H₂, or about the same as the cost of gasoline (US\$2.5 /GJ), to increase the commercial feasibility of a production method^[114]. While microalgae are a costly biomass feedstock, they provide a sustainable means of producing H₂, but there is currently very little information about the technology's economic and environmental viability. The cost of producing biofuels from microalgae residue is dependent on the method of upgrading employed, namely mechanical dewatering (with an operational expenditure of US\$120.8 M per year and

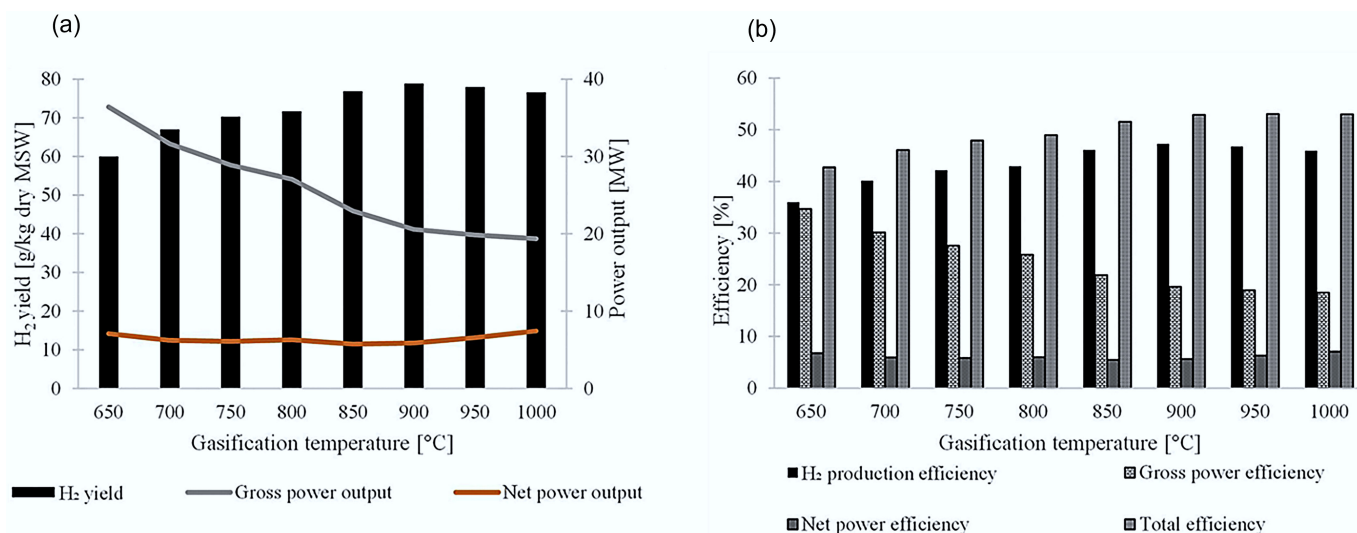


Fig. 6 The influence of gasification temperature on H₂ product yield and process efficiencies^[54].

capital expenditure of US\$409 M) or thermal drying (with an annual operational expenditure of US\$145.8 M and a capital expenditure of US\$346 M). The resulting biofuels are priced between US\$1.49 per liter and US\$1.80 per liter^[115]. A summary of H₂ production costs from biomass and fossil resources, including levelized cost, GWP, and capital expenditures, is provided in Table 8.

The world's largest economies, particularly China, the United States, Japan, and India, have been pivotal in supporting the development of H₂ fuel production^[122]. China, as the leading market for bio-H₂, anticipates that the sector's production value will reach US\$157.44 billion by 2025, significantly outpacing the other major economies^[123]. Japan, the United States, and India have made substantial investments, with projected contributions of US\$3.4 billion, US\$8.0 billion, and US\$25 billion, respectively, aimed at reducing the cost of sustainable H₂ to US\$1 /kg by 2030^[124]. Additionally, nine countries from the European Union and other regions unveiled their H₂ strategies in 2020, including nations such as Australia, the Netherlands, South Korea, Germany, Portugal, Spain, Chile, and Canada, with another eleven countries following suit in 2021^[125]. These significant investments by major global economies are expected to accelerate the development of bio-H₂ facilities and technologies, ultimately offering substantial returns and improving the economic viability of H₂ production.

The H₂ economy holds immense potential to mitigate GHG emissions and reduce pollution, thereby playing a crucial role in achieving the United Nations' Sustainable Development Goals (SDGs). By promoting the adoption of eco-friendly technologies and fostering environmentally conscious production methods, the H₂ economy contributes to environmental preservation and long-term sustainability^[126]. If effectively implemented, this transition can support sustained economic growth while easing the burden on natural resources, establishing a solid foundation for social sustainability. However, for this to be realized, it is imperative to lower processing costs. This will require the continued development and scaling up of new technologies, such as integrated bioprocessing, to enhance the efficiency and economic feasibility of bio-H₂ production.

Life-cycle assessment of bio-based hydrogen

LCA is a crucial methodology for systematically evaluating the environmental, economic, and social impacts of products, processes, and

activities, including H₂ production, biofuel synthesis, power generation, and energy systems. LCA provides a structured analytical framework that identifies both direct and indirect inputs and outputs, assesses energy and material flows, and quantifies environmental impacts throughout the entire life cycle of a product. This approach also helps identify potential areas for improvement in process optimization and policy implementation^[127].

The LCA methodology is standardized under ISO 14040:2006 and ISO 14044, which define four key stages: (1) goal and scope definition, (2) life-cycle inventory analysis (LCI), (3) life-cycle impact assessment (LCIA), and (4) interpretation of results^[128]. The goal and scope definition phase establishes the purpose of the LCA, system boundaries, functional unit, geographical scope, and temporal considerations. The LCI phase involves quantifying all material and energy inputs, emissions, and waste outputs across the system. The LCIA phase evaluates the potential environmental impacts associated with resource use, GHG emissions, and energy consumption. Finally, the interpretation phase ensures that the results align with the study's objectives and provides recommendations for process improvement and policy development.

A cradle-to-grave LCA of bio-based H₂ must consider multiple process steps, including raw biomass production, pretreatment, collection, transportation, syngas production, H₂ purification, distribution, and end-use applications. Each of these stages contributes to the overall environmental impact and energy efficiency of the H₂ production system^[129]. A schematic diagram of the LCA approach is shown in Fig. 7.

The analysis indicates that in the near term, bio-H₂ produced through biomass gasification is unlikely to fully replace conventional H₂ due to various economic and social barriers. Nonetheless, improving process efficiency can strengthen the sustainability of bio-H₂ production, addressing economic, environmental, and social factors. By employing cost-effective measures and leveraging carbon credits, conducting a thorough LCA of bio-H₂ production can support the global shift toward renewable energy systems and net-zero emission targets, as depicted in Fig. 8. Despite its potential, bio-H₂ production from biomass faces notable challenges, such as the need for expensive catalysts, the production of multiple by-products (including CO₂ and H₂), and, in some cases, liquid-phase by-products^[93].

To overcome these limitations, expanding traditional LCA with a

Table 8 Techno-economic comparison of different H₂ production processes

Process type	Feedstock	Capital expenditure (M US\$)	Hydrogen production cost (US\$/kg)	Levelized cost of hydrogen (US\$/kg)	GWP (kg CO ₂ eq/kg H ₂)	Ref.
Biomass						
Gasification and steam reforming	Solid waste	399.2	2.26	3.04	4.4–7.72	[109,116]
	Waste wood	137.65	2	2.77	0.18–6.98 (–24.19 with CCS)	[109,116]
	Wood chips	12.5	1.83–2.35	n.a.	0.18–6.98 (–24.19 with CCS)	[116]
Dark fermentation	Wet waste, sludge	38.162	2.38	2.945	n.a.	[109]
Dark and photo fermentation	Wet waste, sludge	41.642	2.52	3.137	n.a.	[109]
Pyrolysis	Bio-nut shell, olive husk, black liquor, pulp and paper waste	264.6–361.6	1.21–2.57	n.a.	n.a.	[117]
Supercritical water gasification	Black liquor	72.37	1.51–3.89	n.a.	n.a.	[118]
Fossil resources						
SMR	Natural gas	215.4–302.65	0.77	1.45–2.56	10–16	[117]
SMR with CCS	Natural gas			2–2.4	3–10	[119,120]
Coal gasification	Coal	324.57	0.92–2.83	1.26	19.25–23	[117]
Coal gasification with CCS				1.51	4.85–11	[121]
Non-biobased renewables						
H ₂ electrification	Renewable energy			2.9–6.7	0.49–6.63	[119,120]

broader life cycle sustainability assessment (LCSA) is necessary. Unlike standard LCA, LCSA evaluates not only environmental impacts but also economic and social consequences. This comprehensive approach can reveal inefficiencies in operations, potential health risks, and pollution issues linked to bio-H₂ production^[130]. Moreover, LCSA can promote improved resource management, community participation, knowledge exchange, safer living conditions, cost savings, responsible technology adoption, and infrastructure development.

Environmental impacts of bio-H₂ production are primarily assessed through two indicators: acidification potential (AP), mainly due to SO₂ emissions that contribute to acid rain, and GHG emissions, largely CO₂, associated with global warming potential^[131]. A meta-analysis suggested that H₂ production from biomass can lower GHG emissions by up to 75% compared to the natural gas reforming process^[132]. Valente et al.^[116] aimed to standardize LCA studies to better compare AP, cumulative non-renewable energy demand (CEDnr), and GHG emissions. Their research showed that biomass-based H₂ production produces fewer GHG emissions, particularly when coupled with CCS, which can even achieve negative emissions due to carbon absorption during biomass growth. An overview of the global warming potential of various H₂ production pathways is shown in Table 8.

The H₂ was produced by using coal-to-H₂ (CTH) and biomass-to-H₂ (BTH) processes. When compared to producing H₂ from coal,

biomass-to-H₂ methods score better on many relevant LCA indicators. The life cycle boundaries of the system include transportation, syngas synthesis, H₂ purification, and its applications. The energy consumption data for H₂ production indicate that H₂ produced from biomass requires roughly 25% less energy than H₂ produced from coal^[133]. Furthermore, transporting H₂ through pipelines is a more eco-friendly option, as it minimizes GHG emissions^[133]. However, the economic feasibility of bio-H₂ production from residual biomass remains uncertain. Despite the projected global market for H₂ reaching US\$130 billion by 2033^[134], further advancements are necessary for bio-H₂ to become competitive with conventional H₂ production methods.

Combining LCA and LCC for bio-based H₂ production through thermochemical biomass conversion allows for a thorough assessment of both environmental impacts and economic feasibility, promoting efficient resource use and minimizing overall costs. The process typically involves biomass gasification to produce syngas, followed by water-gas shift reactions and H₂ purification (e.g., pressure swing adsorption or membrane separation) to produce high-purity H₂.

Gasification plants requiring investments of US\$1,000–US\$2,500 per kW of installed capacity. The cost depends on factors such as plant scale, gasifier type (e.g., fixed-bed, fluidized-bed, or entrained-flow), and auxiliary systems, including gas cleaning and separation units^[81]. Feedstock costs are a dominant expense, typi-

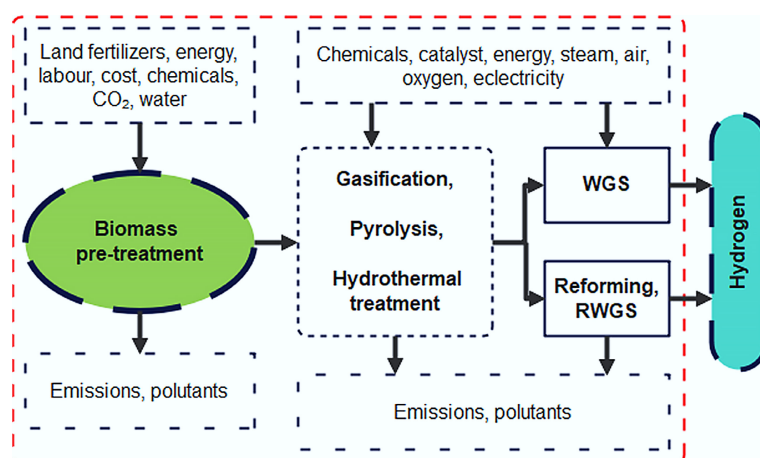


Fig. 7 Schematic diagram of LCA for thermochemical conversion of biomass into H₂.

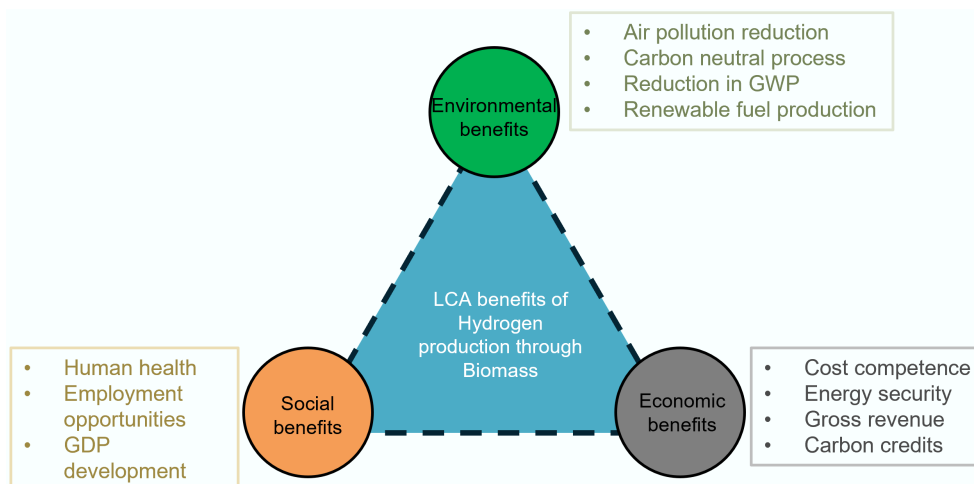


Fig. 8 Social, economic, and environmental benefits of H₂ production through biomass.

cally ranging from US\$30 to 120 per dry ton, depending on the biomass source (e.g., woody residues, agricultural wastes, or dedicated energy crops). These costs account for 40%–60% of the total LCC due to expenses related to harvesting, transportation, and preprocessing^[82]. Operational and maintenance (O&M) expenses contribute an additional 15%–25% to the LCC. Major cost drivers include energy requirements for biomass drying (20%–30% of total energy input), catalyst replacement for syngas upgrading (e.g., US\$10–20 per kg for water-gas shift catalysts), and routine equipment maintenance^[135]. Environmental considerations, such as ash disposal and carbon credit benefits, also affect the LCC. A carbon price of US\$20–50 per ton of CO₂-equivalent could reduce costs by US\$0.05–0.15 per kg through emissions offsets^[84].

Compared to fossil-based H₂ production via steam methane reforming (US\$1.50–2.50 per kg), thermochemical H₂ from biomass is more expensive, with LCC estimates ranging from US\$2.50–5.00 per kg, reflecting higher feedstock and processing costs^[52]. However, its life cycle GHG emissions are 50%–80% lower, providing a strong environmental advantage^[84].

Biomass-based H₂ production can potentially reduce GHG emissions by up to 90%, depending on the production site's conditions and system boundaries. However, the effectiveness of this approach depends significantly on the type of biomass used. Utilizing high-yield biomass sources like eucalyptus can lead to better economic and environmental results^[136]. Integrating advanced assessment methods like exergy analysis with LCA could provide more accurate insights into the sustainability of H₂ production pathways, helping to develop more efficient and sustainable technologies^[137]. TEA is dominated by separation and purification and catalyst life; LCA is dominated by capture rate and electricity carbon intensity. Biomass-to-H₂ + CCS can be net-negative but requires durable WGS/PSA trains and steady feedstock. With current TRL ~4–6 for several routes, market access hinges on hydrogen offtake contracts and carbon policy; near-term pilots should target gate-fee feedstocks and heat recovery to compress LCOH ranges.

Methane production from biomass

Methane is recognized as a cleaner alternative to conventional fossil fuels such as oil and coal. It is commonly used as a fuel alongside

Liquefied Petroleum Gas (LPG) in internal combustion engines^[138]. In 2022, Europe emerged as the largest producer of bio-based methane, producing approximately 1.8 million tons annually^[139]. Methane has diverse applications across residential and industrial sectors, including its use in transportation, electricity generation, and as a key component in fertilizer production^[140].

The global methane market, which was valued at approximately US\$86.24 billion in 2022, is projected to reach US\$106.02 billion by 2028. This growth corresponds to a compound annual growth rate (CAGR) of 3.5% during the forecast period from 2022 to 2028^[141]. Additionally, biogas, a significant source of renewable methane, has the potential to meet nearly 25% of the global renewable energy demand^[142].

The adoption of biogas technology has seen substantial growth in recent years. In the European Union, the number of biogas plants increased from 10,508 in 2010 to approximately 19,000 by 2020, with 880 facilities specifically dedicated to biomethane production^[143]. Similarly, in China, as of 2020, there were 172 biomethane plants and 3,150 biogas plants in operation^[144].

By 2050, several European countries, including Germany, France, Spain, Poland, and Italy, are expected to contribute more than 50% of the total biomethane production capacity, as depicted in Fig. 9. The production potential in these countries is largely influenced by the availability of biomass resources, with larger land areas typically supporting higher methane yields^[145].

A variety of feedstocks, including food waste, microalgae, agricultural residues, MSW, forestry by-products, animal manure, and energy crops, can be utilized for biogas production, further expanding the role of methane in the renewable energy landscape.

Techno-economic analysis of bio-methane

The thermochemical conversion of biomass into methane involves utilizing heat and chemical reactions to break down biomass and produce methane-rich gases. This process typically consists of three primary stages: drying, pyrolysis, and gasification. The resulting syngas undergoes cleaning and upgrading to maximize methane content. Evaluating the economic feasibility of this conversion requires analyzing factors such as total manufacturing costs, capital expenditures, and projected revenue. TEA frameworks incorporate key financial indicators, including return on investment (ROI), discounted payback period,

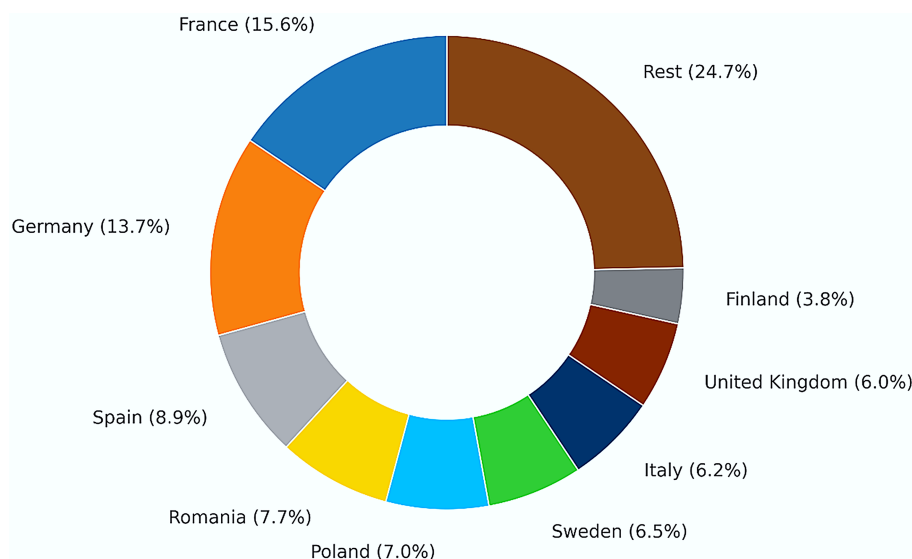


Fig. 9 Bio-based methane production in different countries. Redraw based on the data from Sulewski et al.^[146].

net present value, and internal rate of return (IRR), to assess the profitability and risks associated with biomethane production^[146]. Biomass methanation technologies are approaching higher TRLs (6–7), as outlined in the TEA of bio-based syngas, which supports their near-term potential but still demands targeted improvements in catalyst stability and system integration.

Several studies have investigated the biochemical conversion of biomass into biomethane, providing insights into process efficiencies and cost implications^[147,148]. The techno-economic comparison of syngas, bio-based H₂, and bio-based methane production from biomass is given in Table 9. Syngas production, typically achieved through fluidized bed gasification, offers operational flexibility but is less efficient (32%–53%) compared to bio-H₂ (69% lower heating value (LHV) efficiency) and biomethane (70.98% system efficiency)^[149]. In contrast, biomethane production via methanation achieves high carbon recovery (69.8%) but is hindered by the expense of catalysts^[149].

Key economic considerations include initial capital investment in infrastructure and equipment, operational costs such as feedstock procurement, labor, and maintenance, as well as revenue generation from methane sales. The choice of feedstock significantly influences process economics, with woody biomass, agricultural residues, and dedicated energy crops being the primary materials used in gasification-based methane production^[39]. Catalyst deactivation and rare-metal cost considerations previously discussed in the syngas TEA section are also highly relevant here, particularly for methanation processes.

The chemical composition and energy content of different biomass feedstocks, as presented in Table 1, play a crucial role in determining product yield and overall economic feasibility. Hernández et al.^[150] conducted a comparative analysis of biomethane production costs from various organic waste sources, including food waste, cattle manure, pig manure, and sewage sludge. Their findings indicated that food waste offered the most cost-effective pathway for biomethane production^[150].

Capital costs for biomethane production facilities depend on plant scale, required equipment, and regional factors. Larger-scale plants necessitate more sophisticated and expensive equipment, whereas smaller operations may benefit from lower capital expenditures. Operating costs, on the other hand, are influenced by feedstock prices, labor wages, maintenance expenses, and other ongoing operational requirements. The profitability of methane production is further dictated by market demand and pricing, which can fluctuate based on regional natural gas availability and competition from alternative energy sources.

Conducting a TEA for thermochemical biomass conversion provides a comprehensive understanding of the cost-effectiveness of biomethane production. This analysis is essential for determining whether the process can achieve commercial viability and compete

with conventional fossil fuels and other renewable energy alternatives.

Life cycle assessment of bio-based methane

Thermochemical biomass conversion for methane production can be evaluated for environmental impacts using LCA. This method allows for a comprehensive assessment of the entire process, starting from the feedstock production phase to the ultimate utilization of the methane. LCA provides insights into the sustainability of biomethane production by identifying key environmental impacts across various stages of the process.

As previously mentioned, multiple steps are involved in utilizing LCA to assess the thermochemical conversion of biomass. These include the production and transportation of feedstocks, the thermochemical conversion process, and the distribution and end-use of the methane once it has been converted. The environmental impacts of these stages can be analyzed by considering factors such as water and energy consumption, carbon emissions, and the release of other pollutants. For example, the production of biomass feedstock may involve the application of pesticides and fertilizers, which can negatively affect ecological balance and water quality. Additionally, CO₂ and other GHGs are released during both the feedstock processing and methane production phases, further influencing the overall carbon footprint of biomethane.

Beyond carbon emissions, the thermochemical conversion process itself may lead to the release of particulate matter and other effluents that can contribute to air pollution. However, biomethane is often regarded as a carbon-neutral fuel because the CO₂ emitted during its combustion is theoretically offset by the carbon absorbed by biomass during its growth phase. This balance makes biomethane a promising alternative to fossil-based methane when properly managed.

A comparative study of the GWP for 100 years of various renewable gas production pathways was provided^[151]. The study demonstrated that biomethane can significantly reduce emissions when compared to fossil fuels^[151]. However, it also highlighted that the results of LCA studies are highly dependent on the boundary conditions and methodological assumptions used in the analysis. The study further indicated that achieving a low GWP does not solely depend on the chosen biomethane production technology but is also influenced by several key factors. These include the storage of digestate in closed tanks for biomethane, the utilization of excess heat for bio-SNG, and the use of renewable electricity throughout the production chain. Properly implementing these factors can lead to a significant reduction in environmental impacts, making biomethane a more sustainable option.

An overview of emissions from different biomethane production processes is presented in Table 10, providing a comparative analysis

Table 9 Techno-economic comparison of syngas, bio-based H₂, and bio-based methane production from biomass

Parameter	Syngas	Bio-based hydrogen	Bio-based methane	Ref.
Production method	Gasification (fluidized/entrained bed)	Gasification + WGS reactors + pressure swing adsorption purification	Gasification + methanation (Ni-based catalysts)	[149]
Energy efficiency	32%–53% exergy efficiency	69% LHV efficiency (steam gasification)	70.98% system efficiency (with heat integration)	[149]
Yield	8–14 MJ/Nm ³ (LHV)	0.057–0.107 kg H ₂ /kg biomass	0.4–0.6 kg CH ₄ /kg biomass	[149]
Production cost	US\$0.05–0.15 /m ³	US\$2.90–3.54 /kg	US\$1.37–1.47 /L liquid fuels (via biogas reforming)	[149]
Key cost driver	Gasifier type, O ₂ consumption	Gas cleaning, WGS reactors, electrolysis	Methanation catalysts, drying energy	[149]
Carbon recovery	N/A	41%–69% (with CCS)	69.8% (via gasification + methanation)	[149]
Byproduct	Biochar, residual ash	CO ₂	Biochar, CO ₂ (with CCS)	[149]
TRL	TRL 7–8 (commercial gasifiers)	TRL 6–7 (pilot plants)	TRL 6 (demonstration-scale)	[149]

of various production pathways and their associated environmental impacts. By integrating efficient resource management strategies and optimizing production conditions, biomethane can play a significant role in reducing GHG emissions while contributing to a cleaner and more sustainable energy system.

In addition, most studies that calculated the net energy ratio (NER)—the ratio of total process output energy to total input energy, as defined in Eq. (1)—concluded that the net energy gain was > 1 . This finding underscores the significance of biofuels as viable energy sources^[156]. Despite their advantages, biofuels present challenges, particularly concerning land use. Land transformation for biofuel production—whether from natural landscapes, agricultural areas, or urban regions—has been identified as a key environmental concern. While many studies have assessed the effects of land use, only a limited number have explicitly treated land use as a functional unit in their analyses^[157]. Furthermore, the use of perennial energy crops has been highlighted as a promising strategy for reducing GHG emissions. However, this approach carries the risk of negatively impacting biodiversity by altering natural habitats^[158].

$$NER = \frac{\sum \text{Energy output}}{\sum \text{Energy input}} \quad (1)$$

While biofuels can reduce GHG emissions, other studies highlight the importance of accounting for the water used in crop irrigation and biomass processing. These studies found that the water used in producing biofuels from cotton straws was less than that used in producing bio-oil for power but much higher than that reported for other sources of renewable energy (such as geothermal, solar photovoltaic, and wind power)^[159]. Agricultural production of biomass accounted for 84.6% of all freshwater withdrawals globally^[159].

When considering land use and water depletion impacts, waste-derived feedstocks may be more sustainable energy sources than energy crops. Using waste biomass for energy production could reduce the need for farmland, fertilizer, and agricultural water use. The zero-waste hierarchy (Refuse/redesign $>$ Reduce $>$ Reuse $>$ Recycle $>$ Material and Chemicals Recovery $>$ Residuals Management $>$ Unacceptable, e.g., Landfilling of Non-Stabilized Waste/Energy Recovery) is also consistent with this method of handling waste biomass^[160]. The LCA diagram of methane production from biomass is shown in Fig. 10.

The life-cycle cost analysis (LCCA) of thermochemical methane production from biomass provides a comprehensive evaluation of the economic implications across the entire process, from feedstock sourcing to plant decommissioning. Capital costs represent a significant portion of the LCC, with gasification and methanation systems requiring investments of US\$1,200–2,800 per kW of installed capacity. The cost varies depending on plant size, gasifier type (e.g., downdraft or fluidized-bed), and downstream equipment such as gas cleaning units and methanation reactors^[81]. Feedstock costs are

a critical factor, typically ranging from US\$30–120 per dry ton, depending on the type of biomass (e.g., woody biomass, agricultural residues, or energy crops). These costs generally account for 45%–65% of the total LCC due to procurement, transportation, and preprocessing requirements such as drying and size reduction^[82]. Methanation economics hinge on Ni-catalyst stability and drying energy; LCA hinges on methane slip and digestate management where relevant. Routes are TRL 6–7, suited to regions with pipeline access and carbon crediting. Decision-relevant range: net GWP is most sensitive to slip control ($< 1\%$ – 2%) and renewable electricity in upgrading.

The findings of the LCA and LCCA can inform strategies for mitigating the ecological footprint associated with the thermochemical conversion process. Implementing sustainable practices in feedstock production and promoting renewable energy sources are potential strategies to reduce GHG emissions.

Industrial R&D and case studies

The advancement of sustainable fuels has experienced considerable industrial investigation and innovation, especially in the thermochemical conversion of biomass into gaseous fuels like H_2 , syngas, and methane. This section analyzes pilot projects, demonstrations, and insights gained from diverse initiatives globally, with a particular emphasis on the European Union, where numerous biofuel projects have faced technical, economic, and logistical hurdles. The insights gained from these experiences play a vital role in shaping the broader dialogue surrounding the techno-economic and environmental evaluation of biomass conversion technologies, as examined in this review paper.

Pilot plant case studies

Pilot-scale studies play a critical role in validating biomass thermochemical conversion processes, bridging laboratory research and commercial-scale implementation. The EU has led the way in biofuel studies, implementing numerous initiatives to advance biomass-based gaseous fuels. Nonetheless, several of these initiatives have encountered considerable challenges. The CHRISGAS project, which aimed at producing syngas from biomass through advanced gasification technologies, faced technical challenges concerning feedstock variability and the reliable production of high-quality syngas. This project emphasized the necessity for enhanced feedstock pretreatment and gas cleaning technologies to mitigate tar and other impurities, which are prevalent challenges in biomass gasification processes^[51,52]. Additionally, the project's overall success was hindered by cost overruns and delays stemming from inadequate infrastructure for biomass collection and transport in specific regions of Europe^[161].

A significant initiative, BioSNG, sought to showcase the production of SNG from woody biomass through gasification. The pilot

Table 10 Techno-economic comparison of different SNG and biomethane production processes and their global warming potentials

Process type	Feedstock	Capital expenditure (M US\$)	SNG/biomethane production cost (US\$/MWh)	GWP 100 (kg CO ₂ eq/MWh)	Ref.
Biomass					
Biogas to biomethane	Food waste	75.696	38.91	−168 to 316.8	[150]
	Food waste (scaled up 2×)	141.93	31.94	−168 to 316.8	[150]
	Cattle manure	62.016	130.34	−324 to −236	[150]
	Pig manure	55.518	215.55	−241.3 to 211.5	[150]
	Sludge	58.482	123.73	−52.6 to 16.9	[150]
Gasification and methanation	Solid biomass	62.12–131.1	−86.9 to 95.1 (assuming wood)		[152–155]
SCWG	Microalgae	Very optimistic: 82.8–147.6 optimistic: 284.4–464	n.a.		[55]

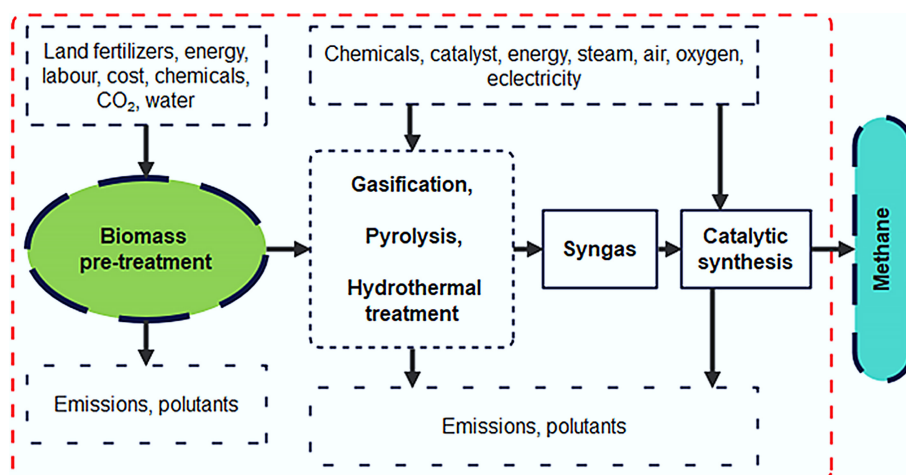


Fig. 10 LCA diagram of methane production from biomass.

plant located in Güssing, Austria, which commenced operations in 2008, effectively showcased the technical viability of transforming biomass into methane. Nonetheless, expanding the technology for commercial use uncovered economic hurdles, especially concerning elevated capital expenses and feedstock logistics^[162]. Despite these challenges, the project yielded important insights into the possibilities of decentralized gasification plants, which may significantly contribute to local energy systems, particularly in rural or forested areas^[163].

Numerous pilot projects in North America have concentrated on H₂ production from biomass. The NREL Thermochemical Pilot Plant in the United States serves as a prominent facility for demonstrating biomass-to-H₂ pathways. The facility employs biomass gasification, subsequent water-gas shift reactions, and CO₂ scrubbing to produce H₂ with a purity level appropriate for fuel cells^[164]. The pilot plant has effectively demonstrated the process; however, challenges concerning H₂ separation and purification, along with the substantial energy requirements for the gasification process, continue to pose significant obstacles to commercial viability^[165]. In Asia, Japan's Biomass Nippon Strategy has facilitated the establishment of multiple pilot plants in Asia that concentrate on converting local agricultural residues into gaseous fuels. The Osaka Gas Hydrogen Pilot Plant utilizes rice husks and other biomass feedstock for H₂ production through pyrolysis and steam reforming^[166]. Despite advancements, a primary challenge in biomass thermochemical conversion remains the substantial capital costs associated with the construction and operation of these facilities. The Horizon 2020 initiative has funded various biofuel projects within the EU, indicating that while small-scale demonstration plants are successful, transitioning to commercial operations frequently necessitates further technological innovation to decrease costs^[167].

A notable pilot-scale study was undertaken by VTT Technical Research Centre of Finland, utilizing a dual-fluidized bed gasifier operating at a thermal capacity ranging from approximately 0.5–1 MW. This plant conducted several extended test runs, each lasting 500–1,000 operational hours, consistently producing high-quality syngas from woody biomass feedstocks. Key achievements of this pilot included demonstrating prolonged catalyst effectiveness and successfully employing pressure swing adsorption (PSA) technology to achieve H₂ purity levels greater than 99.9%^[168].

In a related effort, the Technical University of Denmark conducted a pilot biomass gasification project from 2020 to 2022. Their setup, designed to process about 100 kg of biomass per hour,

incorporated WSG along with PSA purification units. The pilot achieved critical benchmarks, such as stable H₂ production and catalyst durability during test runs exceeding 800 h, thus validating the feasibility of this approach for future scale-up to demonstration-level operations^[169].

Demonstration projects

At scales beyond pilot facilities, multiple demonstration projects have proven the practicality of biomass thermochemical conversion for industrial applications. One prominent example is the Gothenburg Biomass Gasification (GoBiGas) project in Gothenburg, Sweden, which was designed to convert forest residues into biomethane using indirect gasification. Active from 2014 to 2018, the GoBiGas plant operated at a thermal input of roughly 20 MW and delivered biomethane of sufficient purity for injection into the national gas grid. This project highlighted its ability to maintain consistent syngas and methane quality, uphold catalyst longevity, and achieve methane conversion efficiencies of 65%–70%. These outcomes collectively confirmed the process's technical and economic viability, even while encountering challenges such as controlling operational costs and managing plant complexity^[170].

The GoBiGas project in Sweden is notable for its ambitious approach to methane production from biomass at an industrial scale. The initiative focused on producing biomethane from forest biomass through gasification technology, and the initial phase was successfully completed, yielding high-quality methane suitable for injection into the natural gas grid. Nonetheless, GoBiGas ceased operations in 2018 as a result of economic difficulties, such as elevated operational expenses and a lack of demand for biomethane within the Swedish energy sector^[170]. Although the project achieved technical success, its economic viability was compromised by low natural gas prices and a lack of adequate market incentives for biomethane. The GoBiGas case highlights the critical role of policy support and market conditions in influencing the success of biofuel initiatives, even when technical challenges are addressed^[170]. Similarly, the NER300 program, initiated by the European Commission to foster innovative low-carbon energy projects, yielded varied outcomes in the biofuels sector. Numerous initiatives, including the VärmlandsMetanol facility in Sweden, which sought to produce methanol from forest residues, faced challenges in progressing past the pilot stage because of financial and technical uncertainties. The VärmlandsMetanol project presents significant environmental advantages; however, it encountered

considerable obstacles in securing long-term investment, primarily due to elevated capital costs and the inherent risks linked to scaling up the gasification process^[171,172]. This highlights a persistent challenge associated with advanced biofuels: the high initial costs of biomass gasification technologies frequently hinder the attainment of financial sustainability, despite the evident environmental and technical advantages.

Another significant demonstration was the FlexiFuel-SOFC project, supported by EU funding and carried out between 2020 and 2023. This initiative combined adaptable biomass gasification technology with solid oxide fuel cells (SOFC), operating under a budget of approximately EUR5 million. The project achieved notable progress by reliably generating both heat and electricity from diverse biomass sources. Major achievements included maintaining catalyst efficiency at high operating temperatures, implementing effective strategies for managing tar byproducts, and conducting thorough life-cycle and economic assessments. These advances demonstrated the potential of integrating biomass gasification and SOFCs for distributed, sustainable power generation^[173].

Industrial scale-up challenges

Although pilot and demonstration projects have made significant progress, scaling up to full industrial level in biomass thermochemical conversion still presents numerous challenges. High capital and ongoing operational costs, especially those tied to catalyst renewal and intricate system design, continue to be primary obstacles. Issues like catalyst fouling from carbon deposits, poisoning by sulfur, and heat-induced deterioration can substantially increase maintenance expenses and disrupt plant operations. Arregi et al.^[174] reported that, at commercial scale, the financial burden of catalyst replacement and regeneration could account for a significant portion of a facility's total operating costs.

The integration of CCS technologies presents a promising approach to enhance the environmental sustainability of biomass-to-gas projects. The BECCS concept, or Bioenergy with Carbon Capture and Storage, has been investigated in various pilot projects, notably the Drax BECCS Pilot in the UK, which aims to capture carbon emissions from biomass combustion and gasification processes^[175]. The integration of CCS can substantially decrease net CO₂ emissions; however, the economic viability of these combined systems is uncertain due to the substantial costs associated with capture and storage infrastructure^[176]. At a power-system scale, excluding sustainable biomass approximately doubles total costs by 2050; prohibiting CCS raises costs ~78%; the cost of CO₂ removal spans EUR82–335 /tCO₂ (–0.85 Gt) but escalates to EUR1,300–1,700 /tCO₂ in deep negative scenarios (–3.9 Gt), largely due to DAC electricity demand^[74]. However, the inclusion of CCS imposes a significant energy penalty, typically resulting in a 10%–15% decrease in net electrical or fuel conversion efficiency due to additional energy requirements for CO₂ capture, compression, and transport^[177,178]. This efficiency drop can reduce the overall plant output and increase both capital and operational costs. Despite this drawback, LCA studies consistently show that CCS substantially enhances the GHG mitigation potential of biomass gasification systems. When CCS is applied, net life-cycle GHG emissions can shift from near-neutral or modestly negative values (e.g., –100 to –300 kg CO₂-eq/MWh) to deeply negative (up to –800 kg CO₂-eq/MWh) depending on feedstock, capture rate, and supply chain configuration^[179].

These trade-offs underscore the importance of holistic techno-economic and environmental assessments. While the efficiency penalty and increased cost are non-negligible, the potential to

deliver large-scale CO₂ removal (CDR) may justify CCS deployment in policy environments valuing negative emissions^[168]. The choice to integrate CCS should consider regional carbon pricing, biomass sustainability, and infrastructure readiness for long-term storage, as these factors critically affect net climate benefits and economic feasibility.

Role of biorefineries in producing sustainable gaseous fuel

Bio-refineries are essential for the sustainable production of gaseous fuels, including syngas, H₂, and methane, utilizing thermochemical conversion methods such as gasification, pyrolysis, and catalytic reforming. Integrated systems offer a comprehensive strategy for optimizing biomass utilization, enhancing efficiency, and minimizing GHG emissions^[180]. Syngas, comprising H₂ and carbon monoxide, serves as the foundation for the production of fuels and chemicals. The GoBiGas project in Sweden effectively produced syngas through a dual fluidized bed gasification process, subsequently transforming it into synthetic methane (SNG) via catalytic methanation, demonstrating the multifunctionality of biorefineries in producing various energy carriers^[181]. This method improves economic viability and environmental performance, illustrating the function of biorefineries in integrating various processes for increased efficiency.

Syngas production generally entails biomass gasification at higher temperatures with the inclusion of steam or controlled oxygen. Advanced gasification technologies, such as plasma-assisted gasification, have been utilized to enhance syngas quality by minimising tar formation and increasing H₂ content, as demonstrated in the Güssing biorefinery in Austria^[53]. The economic feasibility of syngas production is influenced by elevated capital and operational costs, particularly concerning gasifier maintenance and syngas purification systems^[52]. The quality of biomass feedstock influences both gasification efficiency and syngas yield. The BioSNG project faced challenges in maintaining consistent syngas quality due to the variability of biomass feedstock, which required the implementation of advanced pre-treatment technologies to stabilise input materials^[162].

The production of H₂ from syngas generally entails the WGS reaction, in which CO₂ reacts with steam to produce additional H₂ and CO₂. This process enhances H₂ yield and is typically succeeded by CO₂ separation to achieve high-purity H₂^[131]. The H2Future project in Austria illustrated H₂ production from biomass syngas by integrating biomass gasification with renewable electrolysis to enhance reactor conditions and minimize emissions^[182]. This integration demonstrates techno-economic potential but underscores the necessity for substantial investment in advanced electrolyzers and CO₂ capture systems to attain competitive costs^[183,184]. The production of methane in biorefineries entails the catalytic methanation of syngas. Nickel-based catalysts are widely utilized for their efficiency and cost-effectiveness; nonetheless, catalyst deactivation poses a considerable challenge that impacts long-term economic viability^[185]. The development of catalysts is a key area for improving methane production systems, with research focused on dual-functional and more robust catalysts to enhance stability and decrease operational costs^[186].

System optimization in biorefineries is essential for enhancing the efficiency of syngas, H₂, and methane production. Advanced reactor designs and process control systems enable biorefineries to optimize conditions, minimize tar formation, and enhance gas quality^[187]. The BioRefine-2G project demonstrated that steam-assisted gasification at regulated temperatures can enhance syngas

quality, resulting in higher yields of H₂ and methane^[188]. The findings correspond with existing research that highlights the necessity of advanced gas cleaning technologies, including plasma-assisted reactors and catalytic tar reforming, for the production of high-quality syngas appropriate for subsequent conversion into H₂ or methane^[176].

The environmental sustainability of biorefineries is determined by the selection of feedstock, the efficiency of conversion processes, and the management of emissions. LCA indicates that biorefineries utilizing sustainably sourced feedstock, including agricultural and forestry residues, can markedly reduce GHG emissions in comparison to fossil-based systems^[178]. The BEST initiative showed that methane production from agricultural residues can result in up to 85% reductions in GHG emissions compared to conventional natural gas^[189]. Unsustainable biomass cultivation practices can result in indirect land-use changes (ILUC), potentially undermining the environmental advantages of biorefineries^[190]. The incorporation of bio-char production within gasification processes enhances sustainability through carbon sequestration and improved soil health, thereby supporting biorefinery systems^[191].

Bio-refineries have incorporated carbon capture and utilization technologies to enhance emission reduction efforts. The Drax BECCS pilot project in the UK serves as a prime example, capturing CO₂ during biomass gasification and storing it underground, thereby achieving negative emissions^[192]. Nonetheless, these systems increase overall costs because of the requirements for CO₂ capture, compression, and storage infrastructure^[193]. TEA demonstrates that policy support, including carbon credits and subsidies, is crucial for ensuring the economic viability of these integrated systems^[167].

Ramos & Rouboa^[50] emphasized that plasma gasification within biorefineries not only yields gaseous fuels but also generates vitrified slag as a by-product, which can be repurposed as a secondary raw material in industries such as construction, aligning with circular economy principles^[194]. The environmental benefits of this approach include reduced GHG emissions, with plasma gasification achieving a GWP of −31 to 422 kg CO₂-equ., contributing to decarbonization objectives^[76]. Biorefineries employing plasma gasification can realize substantial economic benefits, with an annual revenue of US\$3.2 million and high conversion efficiencies (20%–45%) for gaseous fuel production^[66]. However, challenges persist in standardizing LCSA methodologies, particularly for S-LCA, due to limitations in data availability and indicator selection^[195]. Ramos & Rouboa^[50] suggest that developing harmonized assessment frameworks and implementing supportive policies could enhance the adoption of plasma gasification in biorefineries, positioning them as a key component of sustainable gaseous fuel production from biomass.

Feedstock logistics represent a significant element influencing the economic and environmental outcomes of biorefineries. Decentralized biorefineries, such as those implemented in the GoBiGas and BioSNG projects, effectively reduce transportation distances, leading to lower costs and emissions^[196]. Identifying biorefineries in proximity to biomass sources enhances economic viability by streamlining local biomass supply chains and minimizing the carbon emissions linked to long-distance biomass transportation^[197]. The effectiveness of these models depends on the establishment of efficient systems for biomass harvesting, storage, and transportation to guarantee a stable and sustainable supply chain.

Regardless of technological progress, the substantial capital costs continue to pose a major obstacle to the expansion of biorefineries. Advancing scaling efforts necessitates additional innovations, especially in the realms of catalyst development and process

efficiency^[198]. Plasma-assisted catalysts demonstrate promise in enhancing conversion efficiency and lowering costs^[39]. These advancements are essential for ensuring that H₂ and methane production from biomass can compete effectively with fossil fuel alternatives. The incorporation of renewable energy sources like wind and solar significantly boosts efficiency and lowers emissions. However, this strategy necessitates considerable investment, as evidenced by the H2Future project^[199].

Future research perspectives

Integrated comparative assessment approach

There is currently a lack of a holistic assessment approach that integrates LCA and TEA across various biomass thermochemical conversion pathways for gaseous fuel production. Conducting comparative TEA and LCA analyses with methodological rigor would enable straightforward comparisons among different biomass conversion routes. Such analyses will improve understanding of both economic feasibility and environmental implications, facilitating informed decision-making regarding the optimal pathways.

Standardization in LCA

The variability in methods, standards, and functional units used in LCA analyses presents challenges for making meaningful comparisons across studies. Establishing a standardized and rigorous LCA framework, agreed upon by stakeholders, is essential to ensure coherence and reliability in sustainability assessments. This standardization should focus on enhancing transparency in research methodologies and the presentation of findings, thereby increasing the credibility and usefulness of LCAs as a comprehensive tool for sustainability evaluations.

Techno-economic and Life-cycle assessment of carbon capture and gasification

Further research is needed to conduct an integrated comparative examination of techno-economic and life-cycle aspects related to carbon capture and the thermochemical conversion of biomass via gasification to produce syngas. Such analyses hold the potential to mitigate environmental burdens from biomass utilization while reducing carbon emissions. Evaluating both the economic feasibility and environmental implications of these processes could lead to sustainable energy production and offer valuable insights into optimizing biomass utilization strategies and reducing carbon footprints.

CO₂ enhanced gasification process

The CO₂ enhanced gasification process has the potential to significantly reduce PM and carbon emissions. This process could play a crucial role in reducing environmental impacts and promoting more sustainable biomass conversion methods.

Advancements in catalyst technology

There is an urgent need for advancements in catalyst technology to reduce costs and improve process efficiency. Overcoming the challenges associated with expensive catalysts and the production of harmful by-products is crucial for advancing biomass thermochemical conversion technologies.

Optimization of biomass-to-hydrogen process chain

Future research should prioritize optimizing the entire biomass-to-H₂ process chain, including biomass pretreatment, gasification, syngas

purification, and H_2 synthesis. This optimization would maximize resource utilization while minimizing environmental impacts, making the process more efficient and sustainable.

Advanced sustainability evaluation methodologies

Integrating advanced methodologies like exergy analysis with traditional LCA and economic assessment frameworks can provide a more comprehensive understanding of the economic, environmental, and societal implications of different H_2 production platforms. This approach will enhance the overall sustainability assessment of these technologies.

Exploration of novel biomass sources

Exploring novel biomass sources, such as eucalyptus and other high- H_2 gas-yielding types, should be a priority in future research. These sources could improve both the economic viability and environmental sustainability of biomass thermochemical conversion processes, making them more attractive options for large-scale deployment.

Interdisciplinary collaboration and innovation

Interdisciplinary collaboration and innovation-driven research are essential for unlocking the full potential of biomass thermochemical conversion technologies. These efforts will be vital in accelerating the transition toward a greener, carbon-neutral energy future.

This analysis comprehensively investigates the significance of biomass in the context of sustainable H_2 production, highlighting thermochemical methods such as gasification. This paper emphasizes the integration of biomass-based H_2 within the larger H_2 economy and energy transition, aligning with global decarbonisation objectives. It underscores the technology's capacity to foster diverse, resilient, and regionally equitable energy systems.

Conclusions

This review underscores the critical importance of transitioning from a fossil fuel-dependent economy to a sustainable, bio-based energy system in response to the escalating global energy demand and the pressing need to mitigate climate change impacts. It highlights the significant role of biomass as a renewable, carbon-neutral resource capable of reducing GHG emissions significantly when substituted for fossil fuels in energy production. The discussion points to the increasing reliance on intricate bio-renewable feedstocks and the potential of advanced second- and third-generation biofuels to address the challenges associated with first-generation biofuels, including indirect land use change. This review also acknowledges the global shift in policy frameworks towards supporting the production and utilization of these advanced biofuels, with a specific focus on the TEA and LCA methodologies as essential tools for evaluating the viability and environmental impacts of biofuel production technologies, especially for syngas, hydrogen, and methane production. By situating biomass within the broader context of renewable energy sources and emphasizing the necessity for scientific and reliable methodologies to assess biofuels' advantages, this review sets the stage for a detailed exploration of the techno-economic and environmental considerations of thermochemical conversion of biomass into gaseous fuels.

This review article delves into the comprehensive landscape of syngas production from biomass, underscoring its pivotal role as an intermediate for synthesizing many bulk chemicals and biofuels. It highlights the process of biomass gasification as a versatile method

for syngas production, capable of utilizing a variety of feedstocks like wood, agricultural waste, and MSW. This process, characterized by its high temperatures and controlled oxygen environment, is poised for growth due to the global shift towards sustainable energy sources. Through the TEA, factors such as capital and operating costs, revenue potential, and sensitivity to market fluctuations are examined, providing a blueprint for economic viability. Moreover, the LCA presents an in-depth analysis of the environmental impacts associated with syngas production, from raw material extraction to waste disposal. It emphasizes the significant advantages of biomass gasification regarding GHG mitigation and reduced dependency on fossil fuels. The synergistic evaluation of TEA and LCA elucidates the multifaceted benefits of syngas production, including economic incentives and environmental stewardship.

The TEA and LCA of hydrogen and methane production from biomass thermochemical conversion underscore the potential and challenges of transitioning towards renewable energy sources. TEA reveals that while biomass thermochemical conversion processes are technologically diverse and evolving for hydrogen production, their economic viability hinges on improving process efficiencies, reducing capital and operating costs, and scaling up production. Compared to fossil fuel-based methods, the high cost of hydrogen production from biomass poses a significant barrier to commercialization despite the environmental benefits. LCA studies indicate that bio-based hydrogen can significantly reduce GHG emissions, highlighting its environmental advantage over conventional hydrogen production methods.

Similarly, the production of methane through the thermochemical conversion of biomass presents a promising pathway for renewable energy. TEA analyses emphasize the importance of selecting appropriate feedstocks and optimizing process designs to enhance economic feasibility. The environmental benefits, as illustrated by LCA, include reduced GHG emissions and the potential for sustainable feedstock management, especially when utilizing waste biomass. Both TEA and LCA underscore the necessity for innovation in process technology, efficient resource utilization, and the development of supportive policy frameworks to realize the full potential of bio-based syngas, hydrogen, and methane as pivotal components of a sustainable energy future.

Author contributions

The authors confirm contributions to the paper as follows: Muhammad Saddam Hussain led the conceptualization and methodology and wrote the original draft; Meng Shi contributed to data curation, formal analysis and visualization; Shiyu Zhang contributed to validation and writing, review and editing; Yeshui Zhang contributed to investigation, provision of resources and writing, review and editing; Xuan Bie contributed to writing, review and editing; Qinghai Li contributed to validation; Yanguo Zhang contributed to conceptualization; Sebastian Lubjuhn contributed to writing, review and editing; Sandra Venghaus contributed to supervision and writing, review and editing; Hui Zhou contributed to conceptualization, supervision and writing, review and editing. All authors reviewed the results and approved the final version of the manuscript.

Data availability

This article is a critical review and does not report any new primary data. All data and information discussed are drawn from previously published studies and publicly available sources, which are fully cited in the reference list. Additional clarifications can be obtained from the author upon reasonable request.

Funding

This work was supported by the National Key R&D Program of China (Grant No. 2025YFE0109700), Tsinghua-Toyota Joint Research Fund, Huaneng Group Science and Technology Research Project (Grant No. HNKJ23-H71), National Natural Science Foundation of China (Grant No. W2542027), International Joint Mission On Climate Change and Carbon Neutrality, Natural Science Foundation of Shanxi Province (Grant Nos 202403021211024, 202403021212148), Tsinghua University Initiative Scientific Research Program, and UK Research and Innovation (UKRI) under the UK government's Horizon Europe funding guarantee (Grant No. EP/Y036751/1). It was also co-funded by the European Union (HyWay project, Grant No. 101130009). The views and opinions expressed are, however, those of the author(s) only and do not necessarily reflect those of the European Union or the Research Executive Agency. Neither the European Union nor the Research Executive Agency can be held responsible for them.

Declarations

Competing interests

The author declares that there is no conflict of interest.

Author details

¹Key Laboratory for Thermal Science and Power Engineering of Ministry of Education, Beijing Key Laboratory of CO₂ Utilization and Reduction Technology, Department of Energy and Power Engineering, Tsinghua University, Beijing 100084, China; ²Shanxi Research Institute for Clean Energy, Tsinghua University, Taiyuan, Shanxi 030000, China; ³Beijing Balance Combustion Technology Co., Ltd, Beijing 100083, China; ⁴School of Engineering, University of Aberdeen, Aberdeen AB24 3UE, UK; ⁵School of Business and Economics, RWTH Aachen University, 52072 Aachen, Germany; ⁶Jülich Systems Analysis, Institute of Climate and Energy Systems (ICE-2), Forschungszentrum Jülich 52428 Jülich, Germany

References

- [1] Ansari FA, Nasr M, Guldhe A, Gupta SK, Rawat I, et al. 2020. Techno-economic feasibility of algal aquaculture via fish and biodiesel production pathways: a commercial-scale application. *Science of The Total Environment* 704:135259
- [2] Shahbaz M, AlNouss A, Ghiat I, McKay G, MacKey H, et al. 2021. A comprehensive review of biomass based thermochemical conversion technologies integrated with CO₂ capture and utilisation within BECCS networks. *Resources, Conservation and Recycling* 173:105734
- [3] CO₂-earth. 2023. CO₂-earth. www.co2.earth/daily-co2
- [4] Xu X, Moulijn JA. 1996. Mitigation of CO₂ by chemical conversion: plausible chemical reactions and promising products. *Energy & Fuels* 10:305–325
- [5] Pelto MS. 2008. Impact of climate change on north cascade alpine glaciers, and alpine runoff. *Northwest Science* 82:65–75
- [6] Haaf M, Anantharaman R, Roussanly S, Ströhle J, Epple B. 2020. CO₂ capture from waste-to-energy plants: techno-economic assessment of novel integration concepts of calcium looping technology. *Resources, Conservation and Recycling* 162:104973
- [7] Ahmad AA, Zawawi NA, Kasim FH, Inayat A, Khasri A. 2016. Assessing the gasification performance of biomass: a review on biomass gasification process conditions, optimization and economic evaluation. *Renewable and Sustainable Energy Reviews* 53:1333–1347
- [8] Aboagye PD, Sharifi A. 2024. Urban climate adaptation and mitigation action plans: a critical review. *Renewable and Sustainable Energy Reviews* 189:113886
- [9] Bouter A, Hurtig O, Besseau R, Buffi M, Kulisic B, et al. 2025. Updating the greenhouse gas emissions of liquid biofuels from Annex V of the Renewable Energy Directive II (RED II): an overview. *Biomass and Bioenergy* 199:107886
- [10] Marquardt W, Harwardt A, Hechinger M, Kraemer K, Viell J, et al. 2010. The biorenewables opportunity - toward next generation process and product systems. *AIChE Journal* 56:2228–2235
- [11] Searchinger T, Heimlich R, Houghton RA, Dong F, Elobeid A, et al. 2008. Use of U.S. croplands for biofuels increases greenhouse gases through emissions from land-use change. *Science* 319:1238–1240
- [12] Kabir Z, Yusuf MA, Khan I. 2021. An overview of policy framework and measures promoting bioenergy usage in the EU, the United States, and Canada. In *Bioenergy Resources and Technologies*, eds Azad AK, Khan MMK. Amsterdam: Academic Press. pp. 383–421 doi: [10.1016/B978-0-12-822525-7.00015-9](https://doi.org/10.1016/B978-0-12-822525-7.00015-9)
- [13] Detsios N, Theodoraki S, Maragoudaki L, Atsonios K, Grammelis P, et al. 2023. Recent advances on alternative aviation fuels/pathways: a critical review. *Energies* 16:1904
- [14] EPA. 2024. Overview of the renewable fuel standard program. www.epa.gov/renewable-fuel-standard-program/overview-renewable-fuel-standard-program
- [15] Zhang P, Yang Y, Shi J, Zheng Y, Wang L, et al. 2018. Opportunities and challenges for renewable energy policy in China. In *Renewable Energy*, ed. Sorensen B. London: Routledge. pp. 486–503 doi: [10.4324/9781315793245-150](https://doi.org/10.4324/9781315793245-150)
- [16] Venditti B. 2024. Visualizing Global Energy Production in 2023. Energy Institute. <https://elements.visualcapitalist.com/visualizing-global-energy-production-in-2023/>
- [17] Kargbo H, Harris JS, Phan AN. 2021. "Drop-in" fuel production from biomass: critical review on techno-economic feasibility and sustainability. *Renewable and Sustainable Energy Reviews* 135:110168
- [18] Zhang C, Fu R, Kang L, Ma Y, Fan D, et al. 2024. An upcycling bioprocess for sustainable aviation fuel production from food waste-derived greenhouse gases: life cycle assessment and techno-economic analysis. *Chemical Engineering Journal* 486:150242
- [19] Osman AI, Mehta N, Elgarahy AM, Al-Hinai A, Al-Muhtaseb AH, et al. 2021. Conversion of biomass to biofuels and life cycle assessment: a review. *Environmental Chemistry Letters* 19:4075–4118
- [20] Ziyadi M, Al-Qadi IL. 2019. Model uncertainty analysis using data analytics for life-cycle assessment (LCA) applications. *The International Journal of Life Cycle Assessment* 24:945–959
- [21] Kaloudas D, Pavlova N, Penchovsky R. 2021. Lignocellulose, algal biomass, biofuels and biohydrogen: a review. *Environmental Chemistry Letters* 19:2809–2824
- [22] Alvarez J, Lopez G, Amutio M, Bilbao J, Olazar M. 2014. Bio-oil production from rice husk fast pyrolysis in a conical spouted bed reactor. *Fuel* 128:162–169
- [23] Li S, Xu S, Liu S, Yang C, Lu Q. 2004. Fast pyrolysis of biomass in free-fall reactor for hydrogen-rich gas. *Fuel Processing Technology* 85:1201–1211
- [24] Onay O. 2007. Influence of pyrolysis temperature and heating rate on the production of bio-oil and char from safflower seed by pyrolysis, using a well-swept fixed-bed reactor. *Fuel Processing Technology* 88:523–531
- [25] Morali U, Yavuzel N, Şensöz S. 2016. Pyrolysis of hornbeam (*Carpinus betulus* L.) sawdust: Characterization of bio-oil and bio-char. *Biore-source Technology* 221:682–685
- [26] Ahmed TY, Ahmad MM, Yusup S, Inayat A, Khan Z. 2012. Mathematical and computational approaches for design of biomass gasification for hydrogen production: a review. *Renewable and Sustainable Energy Reviews* 16:2304–2315
- [27] Danso-Boateng E, Achaw OW. 2022. Bioenergy and biofuel production from biomass using thermochemical conversions technologies—a review. *AIMS Energy* 10:585–647
- [28] Adeniyi AG, Iwuozor KO, Emenike EC, Ajala OJ, Ogunniyi S, et al. 2024. Thermochemical co-conversion of biomass-plastic waste to biochar: a review. *Green Chemical Engineering* 5:31–49
- [29] Balat H, Kirtay E. 2010. Hydrogen from biomass—present scenario and future prospects. *International Journal of Hydrogen Energy* 35:7416–7426

- [30] Shahzad HMA, Asim Z, Khan SJ, Almomani F, Mahmoud KA, et al. 2024. Thermochemical and biochemical conversion of agricultural waste for bioenergy production: an updated review. *Discover Environment* 2:134
- [31] Adeniyi AG, Iwuozor KO, Emenike EC, Amoloye MA, Adeleke JA, et al. 2024. Leaf-based biochar: a review of thermochemical conversion techniques and properties. *Journal of Analytical and Applied Pyrolysis* 177:106352
- [32] Ighalo JO. 2024. Biowastes and derived green sorbents for water decontamination: insights on thermochemical conversion strategies. *Current Opinion in Green and Sustainable Chemistry* 45:100880
- [33] Jha S, Okolie JA, Nanda S, Dalai AK. 2022. A review of biomass resources and thermochemical conversion technologies. *Chemical Engineering & Technology* 45:791–799
- [34] Muh E, Tabet F, Amara S. 2021. Biomass conversion to fuels and value-added chemicals: a comprehensive review of the thermochemical processes. *Current Alternative Energy* 4:3–25
- [35] Lee D, Nam H, Seo MW, Lee SH, Tokmurzin D, et al. 2022. Recent progress in the catalytic thermochemical conversion process of biomass for biofuels. *Chemical Engineering Journal* 447:137501
- [36] Das P, Chandramohan V, Mathimani T, Pugazhendhi A. 2021. Recent advances in thermochemical methods for the conversion of algal biomass to energy. *Science of The Total Environment* 766:144608
- [37] Lewandowski WM, Ryms M, Kosakowski W. 2020. Thermal biomass conversion: a review. *Processes* 8:516
- [38] Arregi A, Amutio M, Lopez G, Bilbao J, Olazar M. 2018. Evaluation of thermochemical routes for hydrogen production from biomass: a review. *Energy Conversion and Management* 165:696–719
- [39] Patel M, Zhang X, Kumar A. 2016. Techno-economic and life cycle assessment on lignocellulosic biomass thermochemical conversion technologies: a review. *Renewable and Sustainable Energy Reviews* 53:1486–1499
- [40] Kumar J, Vyas S. 2025. Comprehensive review of biomass utilization and gasification for sustainable energy production. *Environment, Development and Sustainability* 27:1–40
- [41] Ignat G, Şargu L, Prigoreanu I, Şargu N, Ulinici A, et al. 2024. Assessing the sustainability of agricultural bioenergy potential in the European Union. *Energies* 17:4879
- [42] Thirunavukkarasu M, Sawle Y, Lala H. 2023. A comprehensive review on optimization of hybrid renewable energy systems using various optimization techniques. *Renewable and Sustainable Energy Reviews* 176:113192
- [43] FAO. 2010. *Bioenergy and food security: the BEFS analytical framework*. FAO. www.fao.org/4/i1968e/i1968e00.htm
- [44] Aiguoabarueghian I, Adanma UM, Kupa E. 2024. Land use dynamics and bioenergy: a critical review of environmental and socioeconomic interactions. *World Journal of Advanced Research and Reviews* 23:540–549
- [45] ISO. 2006. *Environmental management — Life cycle assessment — Principles and framework*. www.iso.org/standard/37456.html
- [46] Zimmermann AW, Wunderlich J, Müller L, Buchner GA, Marxen A, et al. 2020. Techno-economic assessment guidelines for CO₂ utilization. *Frontiers in Energy Research* 8:5
- [47] Bertau M, Offermanns H, Plass L, Schmidt F, Wernicke HJ. 2014. *Methanol: the basic chemical and energy feedstock of the future*. Berlin, Heidelberg: Springer doi: 10.1007/978-3-642-39709-7
- [48] AlNouss A, McKay G, Al-Ansari T. 2020. Production of syngas via gasification using optimum blends of biomass. *Journal of Cleaner Production* 242:118499
- [49] Sezer S, Özveren U. 2021. Investigation of syngas exergy value and hydrogen concentration in syngas from biomass gasification in a bubbling fluidized bed gasifier by using machine learning. *International Journal of Hydrogen Energy* 46:20377–20396
- [50] Ramos A, Rouboa A. 2022. Life cycle thinking of plasma gasification as a waste-to-energy tool: review on environmental, economic and social aspects. *Renewable and Sustainable Energy Reviews* 153:111762
- [51] Bridgwater AV. 2012. Review of fast pyrolysis of biomass and product upgrading. *Biomass and Bioenergy* 38:68–94
- [52] Basu P. 2018. Gasification theory. In *Biomass Gasification, Pyrolysis and Torrefaction*, 3rd edition. Amsterdam: Elsevier. pp. 211–262 doi: 10.1016/B978-0-12-812992-0.00007-8
- [53] Rauch R, Hrbek J, Hofbauer H. 2015. Biomass gasification for synthesis gas production and applications of the syngas. *Advances in Bioenergy: The Sustainability Challenge*, eds Lund PD, Byrne J, Berndes G, Vasalos IA. US: John Wiley & Sons, Ltd. pp. 73–91 doi: 10.1002/9781118957844.ch7
- [54] Santos MPS, Hanak DP. 2022. Techno-economic feasibility assessment of sorption enhanced gasification of municipal solid waste for hydrogen production. *International Journal of Hydrogen Energy* 47:6586–6604
- [55] Brandenberger M, Matzenberger J, Vogel F, Ludwig C. 2013. Producing synthetic natural gas from microalgae via supercritical water gasification: a techno-economic sensitivity analysis. *Biomass and Bioenergy* 51:26–34
- [56] Ren J, Liu YL, Zhao XY, Cao JP. 2020. Methanation of syngas from biomass gasification: an overview. *International Journal of Hydrogen Energy* 45:4223–4243
- [57] González-García S, Moreira MT, Feijoo G. 2010. Environmental performance of lignocellulosic bioethanol production from Alfalfa stems. *Biofuels, Bioproducts and Biorefining* 4:118–131
- [58] Cardoso J, Silva V, Eusébio D. 2019. Techno-economic analysis of a biomass gasification power plant dealing with forestry residues blends for electricity production in Portugal. *Journal of Cleaner Production* 212:741–753
- [59] Colantoni A, Villarini M, Monarca D, Carlini M, Mosconi EM, et al. 2021. Economic analysis and risk assessment of biomass gasification CHP systems of different sizes through Monte Carlo simulation. *Energy Reports* 7:1954–1961
- [60] Alegre C, Modica E, Rodlert-Bacilieri M, Mornaghini FC, Aricò AS, et al. 2017. Enhanced durability of a cost-effective perovskite-carbon catalyst for the oxygen evolution and reduction reactions in alkaline environment. *International Journal of Hydrogen Energy* 42:28063–28069
- [61] Sikarwar VS, Zhao M, Fennell PS, Shah N, Anthony EJ. 2017. Progress in biofuel production from gasification. *Progress in Energy and Combustion Science* 61:189–248
- [62] Sarafraz MM, Christo FC. 2020. Thermodynamic assessment and techno-economic analysis of a liquid indium-based chemical looping system for biomass gasification. *Energy Conversion and Management* 225:113428
- [63] Wiatrowski A. 1999. Assessment of supercritical water gasification: alternative designs. *Technical Report*. Golden, USA: National Renewable Energy Laboratory
- [64] Mian A, Ensinas AV, Marechal F. 2015. Multi-objective optimization of SNG production from microalgae through hydrothermal gasification. *Computers & Chemical Engineering* 76:170–183
- [65] Rauch R, Hrbek J, Hofbauer H. 2014. Biomass gasification for synthesis gas production and applications of the syngas. *WIREs Energy and Environment* 3:343–362
- [66] Evangelisti S, Tagliaferri C, Clift R, Lettieri P, Taylor R, et al. 2015. Life cycle assessment of conventional and two-stage advanced energy-from-waste technologies for municipal solid waste treatment. *Journal of Cleaner Production* 100:212–223
- [67] Al-Mosuli D, Barghi S, Fang Z, Xu C. 2014. Techno-economic analysis of renewable hydrogen production via SCWG of biomass using glucose as a model compound. In *Near-critical and Supercritical Water and Their Applications for Biorefineries*, eds Fang Z, Xu C. Volume 2. Dordrecht: Springer. pp. 445–471 doi: 10.1007/978-94-017-8923-3_17
- [68] Albarelli JQ, Mian A, Santos DT, Ensinas AV, Maréchal F, et al. 2015. Valorization of sugarcane biorefinery residues using supercritical water gasification: a case study and perspectives. *The Journal of Supercritical Fluids* 96:133–143
- [69] Ayodele BV, Mustapa SI, Tuan Abdullah TARB, Salleh SF. 2019. A mini-review on hydrogen-rich syngas production by thermo-catalytic and bioconversion of biomass and its environmental implications. *Frontiers in Energy Research* 7:118

- [70] Dias AC. 2014. Life cycle assessment of fuel chip production from eucalypt forest residues. *The International Journal of Life Cycle Assessment* 19:705–717
- [71] Kalinci Y, Hepbasli A, Dincer I. 2012. Life cycle assessment of hydrogen production from biomass gasification systems. *International Journal of Hydrogen Energy* 37:14026–14039
- [72] Arfelli F, Tosi C, Ciacci L, Passarini F. 2024. Life cycle assessment of a wood biomass gasification plant and implications for syngas and biochar utilization. *Energies* 17:2599
- [73] Carpentieri M, Corti A, Lombardi L. 2005. Life cycle assessment (LCA) of an integrated biomass gasification combined cycle (IBGCC) with CO₂ removal. *Energy Conversion and Management* 46:1790–1808
- [74] Béres R, Junginger M, van den Broek M. 2024. Assessing the feasibility of CO₂ removal strategies in achieving climate-neutral power systems: insights from biomass, CO₂ capture, and direct air capture in Europe. *Advances in Applied Energy* 14:100166
- [75] Parvez AM, Mujtaba IM, Wu T. 2016. Energy, exergy and environmental analyses of conventional, steam and CO₂-enhanced rice straw gasification. *Energy* 94:579–588
- [76] Ramos A, Rouboa A. 2020. Renewable energy from solid waste: life cycle analysis and social welfare. *Environmental Impact Assessment Review* 85:106469
- [77] Shen Y, Li X, Yao Z, Cui X, Wang CH. 2019. CO₂ gasification of woody biomass: experimental study from a lab-scale reactor to a small-scale autothermal gasifier. *Energy* 170:497–506
- [78] Gu H, Bergman R. 2015. Life-cycle GHG emissions of electricity from syngas produced by pyrolyzing woody biomass. *Proceedings of the 58th International Convention of Society of Wood Science and Technology, 2015*. Jackson Lake Lodge, Grand Teton National Park, Wyoming, USA. pp. 376–389 <https://research.fs.usda.gov/treesearch/48595>
- [79] Voultsos I, Katsourinis D, Giannopoulos D, Founti M. 2020. Integrating LCA with process modeling for the energetic and environmental assessment of a CHP biomass gasification plant: a case study in Thessaly, Greece. *Eng* 1:2–30
- [80] Maitlo G, Ali I, Mangi KH, Ali S, Maitlo HA, et al. 2022. Thermochemical conversion of biomass for syngas production: current status and future trends. *Sustainability* 14:2596
- [81] Bridgwater AV. 2003. Renewable fuels and chemicals by thermal processing of biomass. *Chemical Engineering Journal* 91:87–102
- [82] Kumar A, Jones DD, Hanna MA. 2009. Thermochemical biomass gasification: a review of the current status of the technology. *Energies* 2:556–581
- [83] International Renewable Energy Agency. 2012. *Renewable energy technologies: cost analysis series: concentrating solar power*. Vol. 4. Abu Dhabi: International Renewable Energy Agency. www.irena.org/publications/2012/Jun/Renewable-Energy-Cost-Analysis---Concentrating-Solar-Power
- [84] Swanson RM, Platon A, Satrio JA, Brown RC. 2010. Techno-economic analysis of biomass-to-liquids production based on gasification. *Fuel* 89:S11–S19
- [85] Göteborg Energi. 2013. The GoBiGas Project -Efficient transfer of biomass to biofuels. IEA Bioenergy EXCO66 meeting in York/Workshop of 12 October 2010. www.ieabioenergy.com/wp-content/uploads/2013/10/ExCo66-P4-The-GoBiGas-project-Ingemar-Gunnarsson1.pdf
- [86] Spath PL, Aasad A, Eggeman T, Ringer M, Wallace B, et al. 2013. *Biomass to hydrogen production detailed design and economics utilizing the Battelle Columbus Laboratory indirectly-heated gasifier (NREL/TP-510-37408)*. Golden, CO: National Renewable Energy Laboratory doi: 10.2172/15016221
- [87] Ahmadvand S. 2023. *Supply chain optimization of forest-based biomass for gasification considering uncertainties*. Thesis. University of British Columbia, Canada. doi: 10.14288/1.0435209
- [88] Bachmann M, Völker S, Kleinekorte J, Bardow A. 2023. Syngas from what? Comparative life-cycle assessment for syngas production from biomass, CO₂, and steel mill off-gases. *ACS Sustainable Chemistry & Engineering* 11:5356–5366
- [89] Wei L, Pordesimo LO, Filip To SD, Herndon CW, Batchelor WD. 2009. Evaluation of micro-scale syngas production costs through modeling. *Transactions of the ASABE* 52:1649–1659
- [90] Li X, Raorane CJ, Xia C, Wu Y, Tran TKN, et al. 2023. Latest approaches on green hydrogen as a potential source of renewable energy towards sustainable energy: spotlighting of recent innovations, challenges, and future insights. *Fuel* 334:126684
- [91] Hydrogen Council. 2017. *Hydrogen scaling up: a sustainable pathway for the global energy transition*. Hydrogen Council www.h2knowledgecentre.com/content/policypaper1201?crawler=redirect&mimetype=application/pdf
- [92] IEA. 2023. *Global hydrogen review 2023*. International Energy Agency, France. www.iea.org/reports/global-hydrogen-review-2023
- [93] Levin DB, Chahine R. 2010. Challenges for renewable hydrogen production from biomass. *International Journal of Hydrogen Energy* 35:4962–4969
- [94] Körner A, Tam C, Bennett S, Gagné J. 2015. *Technology roadmap-hydrogen and fuel cells*. International Energy Agency (IEA): Paris, France. www.iea.org/reports/technology-roadmap-hydrogen-and-fuel-cells
- [95] Talavera-Caro AG, Sánchez-Muñoz MA, Hernández-De Lira IO, Montañez-Hernández LE, Hernández-Almanza AY, et al. 2020. Proteomics of lignocellulosic substrates bioconversion in anaerobic digesters to increase carbon recovery as methane. In *Valorisation of Agro-industrial Residues – Volume I: Biological Approaches*, eds Zakaria Z, Boopathy R, Dib J. Cham: Springer. pp. 81–110 doi: 10.1007/978-3-030-39137-9_4
- [96] Milbrandt A, Seiple T, Heimiller D, Skaggs R, Coleman A. 2018. Wet waste-to-energy resources in the United States. *Resources, Conservation and Recycling* 137:32–47
- [97] Saha S, Jeon BH, Kurade MB, Jadhav SB, Chatterjee PK, et al. 2018. Optimization of dilute acetic acid pretreatment of mixed fruit waste for increased methane production. *Journal of Cleaner Production* 190:411–421
- [98] Reigstad GA, Roussanaly S, Straus J, Anantharaman R, de Kler R, et al. 2022. Moving toward the low-carbon hydrogen economy: experiences and key learnings from national case studies. *Advances in Applied Energy* 8:100108
- [99] Hanto J, Herpich P, Löffler K, Hainsch K, Moskalenko N, et al. 2024. Assessing the implications of hydrogen blending on the European energy system towards 2050. *Advances in Applied Energy* 13:100161
- [100] Consonni S, Mastropasqua L, Spinelli M, Barckholtz TA, Campanari S. 2021. Low-carbon hydrogen via integration of steam methane reforming with molten carbonate fuel cells at low fuel utilization. *Advances in Applied Energy* 2:100010
- [101] Martin J, Dimanchev E, Neumann A. 2023. Carbon abatement costs for renewable fuels in hard-to-abate transport sectors. *Advances in Applied Energy* 12:100156
- [102] Martínez-Gordón R, Gusatu L, Morales-España G, Sijm J, Fajj A. 2022. Benefits of an integrated power and hydrogen offshore grid in a net-zero North Sea energy system. *Advances in Applied Energy* 7:100097
- [103] Davis SJ, Lewis NS, Shaner M, Aggarwal S, Arent D, et al. 2018. Net-zero emissions energy systems. *Science* 360:eaas9793
- [104] Weimann L, Gabrielli P, Boldrini A, Kramer GJ, Gazzani M. 2021. Optimal hydrogen production in a wind-dominated zero-emission energy system. *Advances in Applied Energy* 3:100032
- [105] Megia PJ, Vizcaino AJ, Calles JA, Carrero A. 2021. Hydrogen production technologies: from fossil fuels toward renewable sources. a mini review. *Energy & Fuels* 35:16403–16415
- [106] Sharmila VG, Tamilarasan K, Kumar MD, Kumar G, Varjani S, et al. 2022. Trends in dark biohydrogen production strategy and linkages with transition towards low carbon economy: an outlook, cost-effectiveness, bottlenecks and future scope. *International Journal of Hydrogen Energy* 47:15309–15332
- [107] Lane B, Reed J, Shaffer B, Samuelsen S. 2021. Forecasting renewable hydrogen production technology shares under cost uncertainty. *International Journal of Hydrogen Energy* 46:27293–27306
- [108] Brar KK, Cortez AA, Pellegrini VOA, Amulya K, Polikarpov I, et al. 2022. An overview on progress, advances, and future outlook for biohydrogen production technology. *International Journal of Hydrogen Energy* 47:37264–81

- [109] Lui J, Paul MC, Sloan W, You S. 2022. Techno-economic feasibility of distributed waste-to-hydrogen systems to support green transport in Glasgow. *International Journal of Hydrogen Energy* 47:13532–13551
- [110] Chen WH, Farooq W, Shahbaz M, Naqvi SR, Ali I, et al. 2021. Current status of biohydrogen production from lignocellulosic biomass, technical challenges and commercial potential through pyrolysis process. *Energy* 226:120433
- [111] Kannah RY, Kavitha S, Preethi, Karthikeyan OP, Kumar G, et al. 2021. Techno-economic assessment of various hydrogen production methods—a review. *Bioresource Technology* 319:124175
- [112] Tan ECD, Marker TL, Roberts MJ. 2014. Direct production of gasoline and diesel fuels from biomass via integrated hydropyrolysis and hydroconversion process—a techno-economic analysis. *Environmental Progress & Sustainable Energy* 33:609–617
- [113] Brown TR, Thilakaratne R, Brown RC, Hu G. 2013. Techno-economic analysis of biomass to transportation fuels and electricity via fast pyrolysis and hydroprocessing. *Fuel* 106:463–469
- [114] Hosseinzadeh A, Zhou JL, Li X, Afsari M, Altaee A. 2022. Techno-economic and environmental impact assessment of hydrogen production processes using bio-waste as renewable energy resource. *Renewable and Sustainable Energy Reviews* 156:111991
- [115] Thilakaratne R, Wright MM, Brown RC. 2014. A techno-economic analysis of microalgae remnant catalytic pyrolysis and upgrading to fuels. *Fuel* 128:104–112
- [116] Valente A, Iribarren D, Dufour J. 2019. Harmonising methodological choices in life cycle assessment of hydrogen: a focus on acidification and renewable hydrogen. *International Journal of Hydrogen Energy* 44:19426–19433
- [117] Parthasarathy P, Narayanan KS. 2014. Hydrogen production from steam gasification of biomass: influence of process parameters on hydrogen yield—a review. *Renewable Energy* 66:570–579
- [118] Özdenkçi K, De Blasio C, Sarwar G, Melin K, Koskinen J, et al. 2019. Techno-economic feasibility of supercritical water gasification of black liquor. *Energy* 189:116284
- [119] Canton H. 2021. International energy agency—IEA. In *The Europa Directory of International Organizations 2021*, 23rd edition. London: Routledge. pp. 684–686 doi: 10.4324/9781003179900-103
- [120] IEA. 2019. *The future of hydrogen*. www.iea.org/reports/the-future-of-hydrogen
- [121] Li J, Wei YM, Liu L, Li X, Yan R. 2022. The carbon footprint and cost of coal-based hydrogen production with and without carbon capture and storage technology in China. *Journal of Cleaner Production* 362:132514
- [122] Lee DJ, Show KY, Su A. 2011. Dark fermentation on biohydrogen production: pure culture. *Bioresource Technology* 102:8393–8402
- [123] Saha S, Mondal A, Kurade MB, Ahn Y, Banerjee P, et al. 2023. Cutting-edge technological advancements in biomass-derived hydrogen production. *Reviews in Environmental Science and Bio/Technology* 22:397–426
- [124] Nakano J. 2022. *China's hydrogen industrial strategy*. Center for Strategic & International Studies www.csis.org/analysis/chinas-hydrogen-industrial-strategy
- [125] IRENA. 2021. *Green hydrogen supply: a guide to policy making*. International Renewable Energy Agency Abu Dhabi, United Arab Emirates www.irena.org/publications/2021/May/Green-Hydrogen-Supply-A-Guide-To-Policy-Making
- [126] Qyyum MA, Ismail S, Ni SQ, Ihsanullah I, Ahmad R, et al. 2022. Harvesting biohydrogen from industrial wastewater: production potential, pilot-scale bioreactors, commercialization status, techno-economics, and policy analysis. *Journal of Cleaner Production* 340:130809
- [127] Tagliaferri C, Evangelisti S, Clift R, Lettieri P, Chapman C, et al. 2016. Life cycle assessment of conventional and advanced two-stage energy-from-waste technologies for methane production. *Journal of Cleaner Production* 129:144–158
- [128] Romagnoli F, Blumberg D, Pilicka I. 2011. Life cycle assessment of biohydrogen production in photosynthetic processes. *International Journal of Hydrogen Energy* 36:7866–7871
- [129] Li G, Zhang K, Yang B, Liu F, Weng Y, et al. 2019. Life cycle analysis of a coal to hydrogen process based on ash agglomerating fluidized bed gasification. *Energy* 174:638–646
- [130] Wulf C, Zapp P, Schreiber A, Kuckshinrichs W. 2022. Integrated life cycle sustainability assessment: hydrogen production as a showcase for an emerging methodology. *Towards a Sustainable Future-Life Cycle Management: Challenges and Prospects*, eds Klos ZS, Kalkowska J, Kasprzak J. Cham: Springer. pp 97–106 doi: 10.1007/978-3-030-77127-0_9
- [131] Lepage T, Kammoun M, Schmetz Q, Richel A. 2021. Biomass-to-hydrogen: a review of main routes production, processes evaluation and techno-economical assessment. *Biomass and Bioenergy* 144:105920
- [132] Stoutenburg ED, Jenkins N, Jacobson MZ. 2010. Power output variations of co-located offshore wind turbines and wave energy converters in California. *Renewable Energy* 35:2781–2791
- [133] Li G, Cui P, Wang Y, Liu Z, Zhu Z, et al. 2020. Life cycle energy consumption and GHG emissions of biomass-to-hydrogen process in comparison with coal-to-hydrogen process. *Energy* 191:116588
- [134] O'Brien C. 2023. *Hydrogen economy 2023-2033: production, storage, distribution & applications*, IDTechEx www.idtechex.com/en/research-report/hydrogen-economy/946
- [135] IRENA. 2018. *Hydrogen from renewable power: technology outlook for the energy transition*. International Renewable Energy Agency, Abu Dhabi. www.irena.org/publications/2018/sep/hydrogen-from-renewable-power
- [136] Moreno J, Dufour J. 2013. Life cycle assessment of hydrogen production from biomass gasification. *Evaluation of different Spanish feedstocks*. *International Journal of Hydrogen Energy* 38:7616–7622
- [137] Rosen MA. 2018. Environmental sustainability tools in the biofuel industry. *Biofuel Research Journal* 5:751–752
- [138] Bimbo N, Physick AJ, Noguera-Díaz A, Pugsley A, Holyfield LT, et al. 2015. High volumetric and energy densities of methane stored in nanoporous materials at ambient temperatures and moderate pressures. *Chemical Engineering Journal* 272:38–47
- [139] Department SR. 2022. *Actual and potential biomethane production worldwide in 2022*. www.statista.com/statistics/1296541/global-biomethane-production-and-potential-production/
- [140] BYJUS. 2023. *Methane*. <https://byjus.com/chemistry/methane/>
- [141] Nagrale P. 2025. *Methane market research report information by source*. Methane Market. www.marketresearchfuture.com/reports/methane-market-7373
- [142] Lim C, Kim D, Song C, Kim J, Han J, et al. 2015. Performance and emission characteristics of a vehicle fueled with enriched biogas and natural gases. *Applied Energy* 139:17–29
- [143] Pavičić J, Novak Mavar K, Brkić V, Simon K. 2022. Biogas and biomethane production and usage: technology development, advantages and challenges in Europe. *Energies* 15:2940
- [144] Xue S, Zhang S, Wang Y, Wang Y, Song J, et al. 2022. What can we learn from the experience of European countries in biomethane industry: taking China as an example? *Renewable and Sustainable Energy Reviews* 157:112049
- [145] Sulewski P, Ignaciuk W, Szymańska M, Wąs A. 2023. Development of the biomethane market in Europe. *Energies* 16:2001
- [146] Richardson JW, Johnson MD, Zhang X, Zemke P, Chen W, et al. 2014. A financial assessment of two alternative cultivation systems and their contributions to algae biofuel economic viability. *Algal Research* 4:96–104
- [147] Chandrasekhar K, Cayetano RDA, Mehrez I, Kumar G, Kim SH. 2020. Evaluation of the biochemical methane potential of different sorts of Algerian date biomass. *Environmental Technology & Innovation* 20:101180
- [148] Maneein S, Milledge JJ, Harvey PJ, Nielsen BV. 2021. Methane production from *Sargassum muticum*: effects of seasonality and of freshwater washes. *Energy and Built Environment* 2:235–242
- [149] Bioenergy I, Binder M, Kraussler M, Kuba M, Luisser M. 2018. *Hydrogen from biomass gasification*. IEA Bioenergy. www.ieabioenergy.com/blog/publications/hydrogen-from-biomass-gasification
- [150] Martín-Hernández E, Guerras LS, Martín M. 2020. Optimal technology selection for the biogas upgrading to biomethane. *Journal of Cleaner Production* 267:122032
- [151] Kolb S, Plankenbühler T, Hofmann K, Bergerson J, Karl J. 2021. Life cycle greenhouse gas emissions of renewable gas technologies:

- a comparative review. *Renewable and Sustainable Energy Reviews* 146:111147
- [152] Katla-Milewska D, Nazir SM, Skorek-Osikowska A. 2024. Synthetic natural gas (SNG) production with higher carbon recovery from biomass: techno-economic assessment. *Energy Conversion and Management* 300:117895
- [153] Uusitalo V, Leino M, Kasurinen H, Linnanen L. 2017. Transportation biofuel efficiencies from cultivated feedstock in the boreal climate zone: Case Finland. *Biomass and Bioenergy* 99:79–89
- [154] Müller-Langer F. 2012. *Analyse und Bewertung ausgewählter zukünftiger Biokraftstoffoptionen auf der Basis fester Biomasse*. www.deutsche-digitale-bibliothek.de/item/FJZUF6HAJ25MKFD5RGWRKINL6K33TBX (in Germany)
- [155] Steubing B, Zah R, Ludwig C. 2011. Life cycle assessment of SNG from wood for heating, electricity, and transportation. *Biomass and Bioenergy* 35:2950–2960
- [156] Al-Mawali KS, Osman AI, Al-Muhtaseb AH, Mehta N, Jamil F, et al. 2021. Life cycle assessment of biodiesel production utilising waste date seed oil and a novel magnetic catalyst: a circular bioeconomy approach. *Renewable Energy* 170:832–846
- [157] Brassard P, Godbout S, Hamelin L. 2021. Framework for consequential life cycle assessment of pyrolysis biorefineries: a case study for the conversion of primary forestry residues. *Renewable and Sustainable Energy Reviews* 138:110549
- [158] Di Fulvio F, Forsell N, Korosuo A, Obersteiner M, Hellweg S. 2019. Spatially explicit LCA analysis of biodiversity losses due to different bioenergy policies in the European Union. *Science of The Total Environment* 651:1505–1516
- [159] Schonhoff A, Jablonowski ND, Zapp P. 2021. Environmental competitiveness evaluation by life cycle assessment for solid fuels generated from *Sida hermaphrodita* biomass. *Biomass and Bioenergy* 145:105966
- [160] Simon JM. 2019. A zero waste hierarchy for Europe new tools for new times: from waste management to resource management. Zero Waste Europe. <https://zerowasteurope.eu/2019/05/a-zero-waste-hierarchy-for-europe/>
- [161] IEA Bioenergy. 2015. "CHRISGAS" final report. <https://cordis.europa.eu/project/id/502587/reporting>
- [162] Pfeifer C, Rauch R, Hofbauer H. 2004. In-bed catalytic tar reduction in a dual fluidized bed biomass steam gasifier. *Industrial & Engineering Chemistry Research* 43:1634–1640
- [163] Müller S, Schmid JC, Hofbauer H. 2016. First results with an innovative biomass gasification test plant. *Proc. 3rd International Conference on Renewable Energy Gas Technology, Malmö, Sweden, 2016*. www.researchgate.net/profile/Johannes-Schmid-3/publication/324593963_First_results_with_an_innovative_biomass_gasification_test_plant/links/5c86d3ce299bf1e02e28579b/First-results-with-an-innovative-biomass-gasification-test-plant.pdf
- [164] Connelly E, Penev M, Milbrandt A, Roberts B, Gilroy N, et al. 2020. Resource Assessment for hydrogen production. *Technical Report, NREL/TP-5400-77198* Golden, CO: National Renewable Energy Laboratory <https://docs.nrel.gov/docs/fy20osti/77198.pdf>
- [165] Simbeck D, Chang E. 2002. Hydrogen supply: cost estimate for hydrogen pathways—scoping analysis. *Report, NREL/SR-540-32525*. National Renewable Energy Laboratory. doi: 10.2172/15002482
- [166] Yokoyama S, Matsumura Y. 2015. The present status and future scope of bioenergy in Japan. *Journal of the Japan Institute of Energy* 94:1079–1086
- [167] Junginger M, Van Dam J, Zarrilli S, Mohamed FA, Marchal D, et al. 2011. Opportunities and barriers for international bioenergy trade. *Energy Policy* 39:2028–2042
- [168] Meuleneers L, Engelman L, Ostojic S, Harzendorf F, Sheykha S, et al. 2024. From Diverse Perspectives to Informed Policymaking—An Interdisciplinary Perspective on the Assessment of DACCS and Other Terrestrial CDR Technologies. doi: 10.2139/ssrn.5278865
- [169] DTU ENERGY, Department of Energy Conversion and Storage. 2022. *Pilot plant demonstration of biomass gasification and PSA purification*. www.energy.dtu.dk
- [170] Thunman H, Seemann M. 2019. The GoBiGas plant. In *Substitute Natural Gas from Waste*, eds Materazzi M, Foscolo PU. Amsterdam: Elsevier. pp. 455–474 doi: 10.1016/B978-0-12-815554-7.00017-9
- [171] Borys G. 2020. NER300: Success or Failure of Public Support for Low-emission Technologies? *Problemy Ekorozwoju* 15:189–196
- [172] Grahm M, Hansson J. 2016. Prospects for domestic biofuels for transport in Sweden 2030 based on current production and future plans. *Advances in Bioenergy: The Sustainability Challenge*, eds Lund PD, Byrne J, Berndes G, Vasalos IA. US: John Wiley & Sons, Ltd. pp. 431–446 doi: 10.1002/9781118957844.ch28
- [173] European Commission. 2023. *FlexiFuel-SOFC project report*. <https://cordis.europa.eu/project/id/641229>
- [174] Arregi A, Lopez G, Amutio M, Artetxe M, Barbarias I, et al. 2018. Role of operating conditions in the catalyst deactivation in the in-line steam reforming of volatiles from biomass fast pyrolysis. *Fuel* 216:233–244
- [175] Shang D, Sun G. 2016. Electricity-price arbitrage with plug-in hybrid electric vehicle: gain or loss? *Energy Policy* 95:402–410
- [176] Rubin ES, Davison JE, Herzog HJ. 2015. The cost of CO₂ capture and storage. *International Journal of Greenhouse Gas Control* 40:378–400
- [177] Bui M, Adjiman CS, Bardow A, Anthony EJ, Boston A, et al. 2018. Carbon capture and storage (CCS): the way forward. *Energy & Environmental Science* 11:1062–1176
- [178] Fajardy M, Morris J, Gurgel A, Herzog H, Mac Dowell N, et al. 2021. The economics of bioenergy with carbon capture and storage (BECCS) deployment in a 1.5 °C or 2 °C world. *Global Environmental Change* 68:102262
- [179] Salas DA, Boero AJ, Ramirez AD. 2024. Life cycle assessment of bioenergy with carbon capture and storage: a review. *Renewable and Sustainable Energy Reviews* 199:114458
- [180] Dahmen N, Henrich E, Dinjus E, Weirich F. 2012. The bioliq® bioslurry gasification process for the production of biosynfuels, organic chemicals, and energy. *Energy, Sustainability and Society* 2:3
- [181] Thunman H, Seemann M, Berdugo Vilches T, Maric J, Pallares D, et al. 2018. Advanced biofuel production via gasification—lessons learned from 200 man-years of research activity with Chalmers' research gasifier and the GoBiGas demonstration plant. *Energy Science & Engineering* 6:6–34
- [182] Yue G, Lin H, Peng Y, Min J, Wang M, et al. 2021. Future green hydrogen energy from biomass. *Chemical Industry and Engineering Progress* 40:4678–4684 (in Chinese)
- [183] Faaij A. 2006. Modern biomass conversion technologies. *Mitigation and Adaptation Strategies for Global Change* 11:343–375
- [184] Tezer Ö, Karabağ N, Öngen A, Çolpan CÖ, Ayol A. 2022. Biomass gasification for sustainable energy production: a review. *International Journal of Hydrogen Energy* 47:15419–15433
- [185] Schiebahn S, Grube T, Robinus M, Tietze V, Kumar B, et al. 2015. Power to gas: technological overview, systems analysis and economic assessment for a case study in Germany. *International Journal of Hydrogen Energy* 40:4285–4294
- [186] Anca-Couce A, Hochenauer C, Scharler R. 2021. Bioenergy technologies, uses, market and future trends with Austria as a case study. *Renewable and Sustainable Energy Reviews* 135:110237
- [187] Cherubini F, Strömman AH. 2011. Life cycle assessment of bioenergy systems: state of the art and future challenges. *Bioresource Technology* 102:437–451
- [188] Smith P, Davis SJ, Creutzig F, Fuss S, Minx J, et al. 2016. Biophysical and economic limits to negative CO₂ emissions. *Nature Climate Change* 6:42–50
- [189] Sims REH, Mabey W, Saddler JN, Taylor M. 2010. An overview of second generation biofuel technologies. *Bioresource Technology* 101:1570–1580
- [190] Yaashikaa PR, Devi MK, Kumar PS. 2022. Biohydrogen production: an outlook on methods, constraints, economic analysis and future prospect. *International Journal of Hydrogen Energy* 47:41488–41506
- [191] Lehmann J, Joseph S. 2024. *Biochar for environmental management: science, technology and implementation*. 3rd Edition. London: Routledge. 902 pp. doi: 10.4324/9781003297673
- [192] International Energy Agency (IEA). 2021. *The role of hydrogen in energy transition*. https://iea.blob.core.windows.net/assets/a76b2cc9-f7e3-459e-945e-91b8ff54d0fc/210318_IEA_Kristiansen.pdf

- [193] Zhang YS, Schneider K, Qiu H, Zhu HL. 2022. A perspective of low carbon lithium-ion battery recycling technology. *Carbon Capture Science & Technology* 5:100074
- [194] Ray R, Taylor R, Chapman C. 2012. The deployment of an advanced gasification technology in the treatment of household and other waste streams. *Process Safety and Environmental Protection* 90:213–220
- [195] Lin R, Man Y, Ren J. 2020. Framework of life cycle sustainability assessment. In *Life Cycle Sustainability Assessment for Decision-Making*. Amsterdam: Elsevier. pp. 155–173 doi: [10.1016/B978-0-12-818355-7.00008-7](https://doi.org/10.1016/B978-0-12-818355-7.00008-7)
- [196] Taylor SC, Firth SK, Wang C, Allinson D, Quddus M, et al. 2014. Spatial mapping of building energy demand in Great Britain. *GCB Bioenergy* 6:123–135
- [197] van der Meijden CM, Veringa HJ, Rabou LPLM. 2010. The production of synthetic natural gas (SNG): a comparison of three wood gasification systems for energy balance and overall efficiency. *Biomass and Bioenergy* 34:302–311
- [198] Pfeifer C, Koppatz S, Hofbauer H. 2011. Steam gasification of various feedstocks at a dual fluidised bed gasifier: impacts of operation conditions and bed materials. *Biomass Conversion and Biorefinery* 1:39–53
- [199] Alptekin FM, Celiktaş MS. 2022. Review on catalytic biomass gasification for hydrogen production as a sustainable energy form and social, technological, economic, environmental, and political analysis of catalysts. *ACS Omega* 7:24918–24941



Copyright: © 2025 by the author(s). Published by Maximum Academic Press, Fayetteville, GA. This article is an open access article distributed under Creative Commons Attribution License (CC BY 4.0), visit <https://creativecommons.org/licenses/by/4.0/>.