

Eliminating beam-induced depolarizing effects in the hydrogen jet target for high-precision proton beam polarimetry at the electron-ion collider

F. Rathmann^{1,*}, A. Nass², K. O. Eyser¹, V. Shmakova¹, E. C. Aschenauer¹, G. Atoian¹,
A. Cannavo¹, X. Chu¹, K. Hock¹, H. Huang¹, H. Lovelace¹, G. Mahler¹,
N. N. Nikolaev^{3,4,5}, J. Ritter¹, G. Robert-Demolaize¹, V. Schoefer¹, P. Shanmuganathan¹,
E. Shulga¹, H. Soltner⁶, and Z. Zhang¹

¹Brookhaven National Laboratory, Upton, New York 11973, USA

²Institut für Kernphysik, Forschungszentrum Jülich, 52425, Jülich, Germany

³L.D. Landau Institute for Theoretical Physics, Chernogolovka, Russia

⁴Moscow Institute of Physics and Technology, National Research University, Dolgoprudny, Moscow Region 141701, Russian Federation

⁵Bogoliubov Laboratory of Theoretical Physics, International Intergovernmental Scientific Research Organization, Joint Institute for Nuclear Research, Dubna, Moscow, Region, 141980, Russia

⁶Institute of Technology and Engineering, Forschungszentrum Jülich, 52425, Jülich, Germany



(Received 10 September 2025; accepted 7 January 2026; published 10 February 2026)

We analyze beam-induced depolarizing effects in the hydrogen jet target (HJET) at the relativistic heavy ion collider (RHIC), which has been used for absolute hadron beam polarimetry and shall be employed at the electron-ion collider (EIC). The EIC's higher bunch repetition frequencies and shorter bunch durations shift beam harmonics to frequencies that can resonantly drive hyperfine transitions in hydrogen, threatening to depolarize the target atoms. Using frequency-domain analysis of beam harmonics and hyperfine transition frequencies, we establish a photon emission threshold above which beam-induced fields are too weak to cause significant depolarization. For EIC injection (23.5 GeV) and flattop (275 GeV), beam-induced depolarization through the bunch structure renders operation at the current RHIC magnetic guide field at the target ($B_0 = 120$ mT) untenable. Increasing the magnetic guide field at the target to $B_0 \approx 400$ mT moves all hyperfine transition frequencies to at least 3 times the cutoff frequency, ensuring reliable absolute beam polarimetry with the required 1% precision at the EIC.

DOI: [10.1103/8nh5-l63q](https://doi.org/10.1103/8nh5-l63q)

I. INTRODUCTION

The electron-ion collider (EIC) is the next-generation facility designed to explore the internal structure of nucleons and nuclei with unprecedented precision [1]. By colliding polarized electrons with polarized protons and ions across a wide range of species and energies, the EIC will provide essential insights into the spin structure of the nucleon, the origin of mass, and the role of gluons in quantum chromodynamics [2,3].

Accurate and reliable beam polarization measurements are essential to the success of the EIC scientific program. The polarized hadron running modes foresee operation with proton [4] and helium-3 ($^3\text{He}^{++}$) beams [5] and

polarized electrons [6,7], with the potential future addition of deuterons and other light ion species. A key performance requirement is to deliver beam polarization $P \geq 0.7$ with a relative uncertainty of $(\frac{\delta P}{P}) \leq 1\%$ [3].

To meet these challenging requirements, the beam polarimetry shall characterize the full polarization vector $\vec{P} = (P_x, P_y, P_z)$, track the spatial profile of the polarization in the transverse planes [8] on a bunch-by-bunch basis, and monitor the polarization lifetime [9] throughout each store. For the EIC physics analyses described in Ref. [3], however, it is the projection of \vec{P} onto the stable spin axis that matters, with any transverse (in-plane) polarization ideally minimized.

The EIC polarimetry system will combine a high-accuracy absolute beam polarimeter, based on a polarized atomic beam and Breit-Rabi polarimeter (BRP), with fast relative proton-carbon (pC) polarimeters for bunch-by-bunch monitoring of polarization profiles and beam lifetime. The polarized jet target and two pC polarimeters [10] for horizontal and vertical measurements are presently installed at RHIC's interaction point (IP) 12, where they

*Contact author: frathmann@bnl.gov

Published by the American Physical Society under the terms of the [Creative Commons Attribution 4.0 International license](https://creativecommons.org/licenses/by/4.0/). Further distribution of this work must maintain attribution to the author(s) and the published article's title, journal citation, and DOI.

have been successfully operated throughout the spin program [11,12]. For the EIC, these instruments will be relocated to IP 4 (4 o'clock position), while a second pC polarimeter will be deployed at IP 6 [3], collocated with the primary detector (ePIC) and between the spin rotators, as illustrated in Fig. 1.

It should be noted that the EIC polarimetry requirements represent a substantial enhancement over current RHIC capabilities, as the polarized hydrogen jet target (HJET) was designed to achieve an absolute calibration of the proton-carbon polarimeters to approximately 5% [11]. The stringent 1% relative polarization uncertainty requirement demanded by the EIC physics program necessitates a comprehensive reassessment of all systematic effects, including the beam-induced target depolarizing mechanisms analyzed in this work.

Beam-induced depolarizing effects due to the bunch structure of the beam, observed in polarized gas targets at the VEPP-3 electron ring in Novosibirsk [13], at the AmPS ring at NIKHEF [14], and in the HERMES experiment at HERA [15,16], pose a significant risk to polarized target operations at the EIC. This paper quantitatively assesses such effects under the anticipated EIC beam and optics conditions at IP 4, with the goal of ensuring reliable operation of the polarized target and enabling absolute

beam polarimetry. The comparison to RHIC operation at IP 12 serves as a benchmark to identify and understand depolarizing mechanisms that may arise at the EIC. The EIC is expected to operate with substantially enhanced beam conditions at both injection and flattop energies, particularly in bunch number ($10 \times$ higher), bunch length ($10 \times$ shorter), and stored beam current ($3 \times$ higher), necessitating separate analyses for EIC injection and flattop conditions.

The paper is organized as follows. Section II outlines the principle of absolute beam polarimetry using the HJET and the CNI scattering method. Section III reviews the hyperfine level structure of hydrogen, the transition frequencies, and the target operation at RHIC. Section IV analyzes the temporal and spectral properties of beam-induced magnetic fields. Section V provides a detailed analysis of beam-induced depolarization effects at RHIC flattop, including resonance conditions, photon emission thresholds, and spatial magnetic field distributions at the target. Section VI extends this analysis to the EIC at both injection and flattop, examining how higher bunch frequencies and different beam parameters affect depolarization of hydrogen atoms when operated at the same holding field as at RHIC, and presents a solution for reliable EIC operation. Section VII offers concluding remarks.

II. PRINCIPLE OF ABSOLUTE BEAM POLARIMETRY

A. Analyzing power in the CNI region

At the beam energies available at the alternating gradient synchrotron (AGS) and RHIC, no scattering processes exist for which the analyzing power A_y is known with sufficient precision to achieve the beam polarization uncertainty of $(\frac{\delta P}{P}) \leq 1\%$ [17,18]. The method developed at RHIC for absolute beam polarization measurements therefore relies on a polarized atomic beam source (ABS) combined with a BRP [17,19]. This technique enables an accurate determination of the target polarization Q , which is then used to calibrate the beam polarization based on measured asymmetries in elastic proton-proton scattering in the Coulomb-nuclear interference (CNI) region [20–22].

The CNI asymmetry arises from the interference between electromagnetic and hadronic amplitudes at small momentum transfer [11,23–25]. This same electromagnetic amplitude also governs the proton's magnetic moment $\mu_p = g_p \mu_N = 2(1 + G_p) \mu_N$, where g_p is the proton magnetic g -factor, $G_p = (g_p - 2)/2$ is the anomalous gyromagnetic ratio [26]. The nuclear magneton $\mu_N = e\hbar/2m_p$ and related constants are listed in Table I.

At high energies, such as those at RHIC, the CNI region provides a maximum analyzing power of $A_y \approx 0.046$ at $t = 0.003 \text{ GeV}^2$ for pp elastic scattering [18,20]. The role of electromagnetic interference in determining A_y and enabling absolute polarization calibration has been

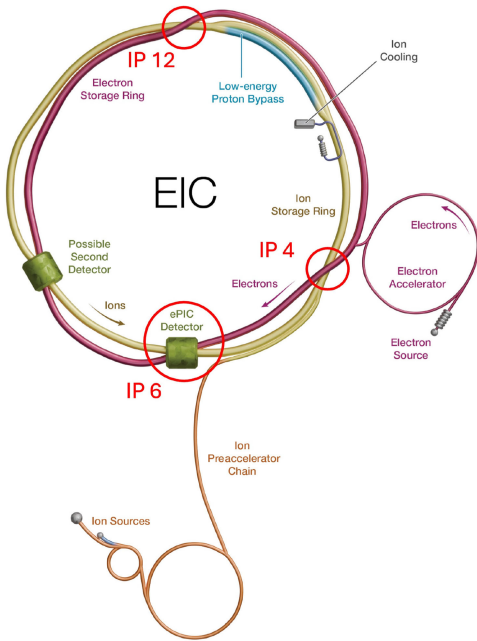


FIG. 1. Aerial view of the electron-ion collider (EIC) layout at Brookhaven National Laboratory. The primary detector, ePIC, is located at interaction point IP 6 (6 o'clock position). For the EIC, the absolute HJET polarimeter and one fast proton-carbon (pC) polarimeter will be installed at IP 4 (4 o'clock), while an additional pC polarimeter is foreseen near IP 6. During RHIC operation, the HJET and two pC polarimeters (one for each beam) were located at IP 12 (12 o'clock). (Figure reflects the project planning status as of May 2025.)

TABLE I. Fundamental physical constants and hydrogen-specific parameters used for analyzing hyperfine structure and beam-induced depolarization effects.

Quantity	Symbol	Value	Unit	Reference
Hyperfine frequency of hydrogen	f_{hfs}	1.420405748×10^9	Hz	[27]
Boltzmann constant	k_B	1.380649×10^{-23}	J K^{-1}	[28]
Hydrogen atom mass	m_H	$1.6735575 \times 10^{-27}$	kg	[28]
Gyromagnetic ratio of H (electron)	$\gamma_H/2\pi$	28.025×10^9	Hz T^{-1}	[28]
Planck constant	h	$6.62607015 \times 10^{-34}$	J s	[28]
Elementary charge	e	$1.602176634 \times 10^{-19}$	C	[28]
Permeability of free space	μ_0	$4\pi \times 10^{-7}$	H m^{-1}	[28]
Electron mass	m_e	$9.1093837015 \times 10^{-31}$	kg	[28]
Proton mass	m_p	$1.67262192369 \times 10^{-27}$	kg	[28]
Bohr magneton	$\mu_B = \frac{e\hbar}{2m_e}$	5.7883818×10^{-5}	eV T^{-1}	[28]
Nuclear magneton	$\mu_N = \frac{e\hbar}{2m_p}$	3.1524513×10^{-8}	eV T^{-1}	[28]
Electron g -factor	g_J	2.0023193	...	[28]
Proton g -factor	g_I	5.5856947	...	[28]

emphasized, e.g., in Ref. [22]. Because the absolute magnitude of A_y depends on both theoretical modeling and experimental normalization, an accurately calibrated polarized target (via ABS and BRP) remains essential for achieving high-precision absolute beam polarization determination at the EIC.

B. Polarized hydrogen target setup at IP 12 in RHIC

The HJET polarimeter [17,29], presently located at IP 12 in RHIC (see Fig. 1), consists of three core components that operate together as an integrated system. These include the polarized ABS, a scattering chamber with a holding field magnet, and the BRP, all arranged along a common vertical axis, as illustrated in Fig. 2. Recoil protons are detected in the horizontal plane, perpendicular to the directions of the circulating beams.

The system operates under a shared vacuum maintained by nine identical cylindrical chambers, each measuring 50 cm in diameter and 32 cm in length. The dissociator chamber is evacuated by three turbomolecular pumps, each of the subsequent chambers is evacuated by a pair of turbomolecular pumps in a nine-stage differential pumping system, with each individual pump providing a pumping speed of 1000 L/s and a compression ratio of 10^6 for H_2 .

The ABS generates a polarized hydrogen atomic beam with a target thickness of approximately 1×10^{12} atoms/cm² [29], enabling continuous, noninvasive operation without disturbing the circulating beams or generating background for other experiments. While the initial design aimed to achieve a beam polarization uncertainty of $(\frac{\delta P}{P}) \leq 5\%$ [30], recent work reported in Ref. [31] claimed substantial reductions in systematic uncertainties to $(\frac{\delta P}{P})_{\text{syst}} \leq 0.5\%$. However, the methodology applied in Ref. [31] for determining the molecular content of the atomic beam is inappropriate and underestimates the contribution of hydrogen molecules in the

target. Data from the ANKE ABS at COSY [32], analyzed in Appendix A, show that the molecular content in an atomic beam is on the order of 3% to 4%, consistent with findings in [33,34], and contradicting the claims made in Ref. [31].

The present study evaluates the modifications necessary for adapting the HJET polarimeter system to the EIC

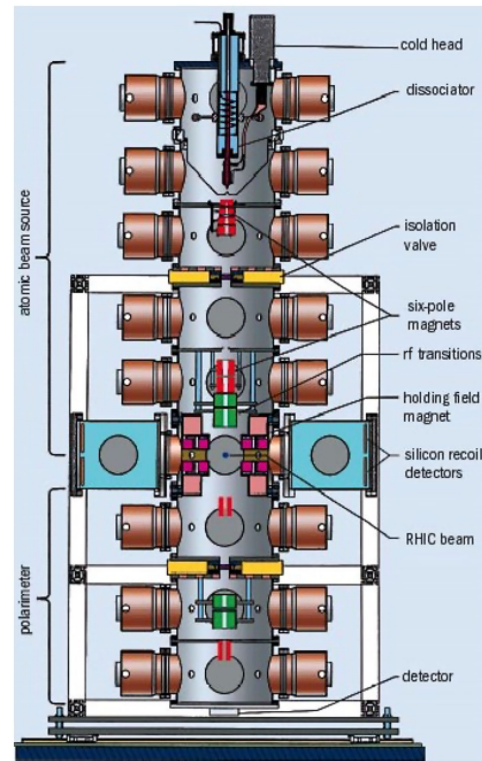


FIG. 2. Schematic layout of the HJET polarimeter, taken from Ref. [17], showing the atomic beam source, the scattering chamber, and the Breit-Rabi polarimeter. The detector geometry and coordinate system are detailed in Fig. 3.

environment, where significantly higher beam currents and increased bunch repetition frequencies present new challenges compared to RHIC, with the goal of achieving a relative systematic uncertainty of $(\frac{\delta P}{P}) \leq 1\%$. While additional modifications may be required, the adaptations identified in this study are definitively necessary for successful operation under EIC conditions.

C. Absolute polarization calibration

The polarized atomic beam intersects the circulating hadron beam in a vacuum chamber equipped with silicon strip detectors positioned on both sides of the beam axis, as illustrated in Fig. 3. The blue detector pair measures the scattering asymmetry of the blue beam, and the yellow pair does the same for the yellow beam. From these scattering asymmetries, the vertical beam polarization component P_y is extracted [31].

With the present setup of detectors to the left (L) and right (R) of the beams at IP 12 in RHIC (Fig. 3), and a magnetic guide field of

$$\vec{B}_0 = B_0 \vec{e}_y, \quad (1)$$

where $B_0 \approx 120$ mT, the vertical beam polarization component P_y can be absolutely determined in the CNI region near $\theta_{c.m.} = 90^\circ$ based on the target polarization Q_y , determined by the BRP. The relation governing the beam polarization dependence of scattered protons is given by [35]

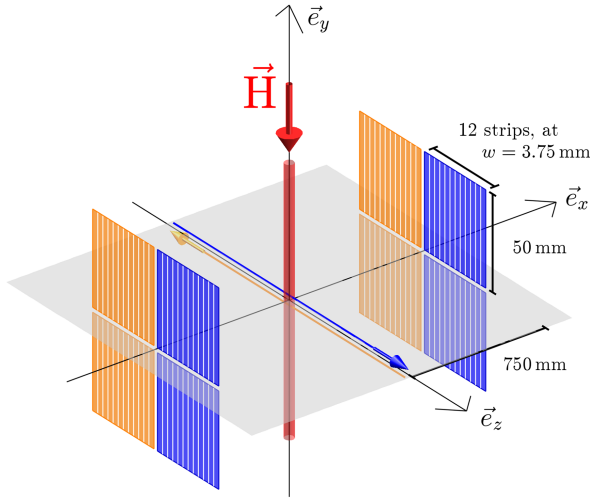


FIG. 3. Sketch of the detector setup at the HJET at RHIC. The atomic \vec{H} beam enters from above and intersects the hadron beams orthogonally. Recoil protons are detected using silicon strip detectors placed symmetrically to the left and right of the vertically separated blue and yellow beams. 8 Si strip detectors are used with 12 vertical strips, each with a pitch of $w = 3.75$ mm and $500 \mu\text{m}$ thickness. The coordinate system is indicated with $\vec{e}_x \parallel$ to ring plane, $\vec{e}_y \perp$ to ring plane, and \vec{e}_z along the beam momentum.

$$\sigma(\theta, \phi) = \sigma_0(\theta)[1 + A_y(\theta)P_y \cos \phi], \quad (2)$$

where θ denotes the scattering angle, σ_0 is the unpolarized cross section, ϕ is the azimuthal scattering angle, and A_y is the corresponding analyzing power. When the sign of the vertical target polarization Q_y is periodically reversed to compensate for asymmetries caused by differences in the detector geometry or detector efficiency in the L and R directions [39], the target asymmetry is determined from the accumulated number of counts in the detectors via

$$\epsilon_{\text{target}} = \frac{L - R}{L + R} = A_y Q_y. \quad (3)$$

A measurement of the corresponding asymmetry with beam particles determines ϵ_{beam} . In elastic pp scattering, and more general in the elastic scattering of identical particles, A_y is the same regardless of which particle is polarized. The beam polarization P_y is then obtained from

$$P_y = \frac{\epsilon_{\text{beam}}}{\epsilon_{\text{target}}} Q_y. \quad (4)$$

When beam and target particles are both polarized, detector systems with full azimuthal coverage provide access to the other two components of the beam polarization, P_x and P_z , as established in, e.g., Refs. [40,41]. Obviously, with an unpolarized target, due to parity conservation as in, e.g., proton-proton scattering, the longitudinal beam polarization component P_z cannot be directly measured.

The polarimeters envisioned for proton beams at the EIC will combine a high-precision absolute polarimeter, based on an ABS and a BRP, with two fast and flexible relative pC polarimeters in IP 4 and IP 6. While the polarized hydrogen jet target technology developed for RHIC provides a proven foundation, the substantially higher beam intensities and bunch repetition frequencies at the EIC necessitate a comprehensive reassessment of beam-induced depolarization effects and a refined experimental design. This includes both the achievement of a beam polarization measurement to a precision of $(\frac{\delta P}{P}) \leq 1\%$ and the capability to determine the complete beam spin vector \vec{P} . Other critical aspects, such as the determination of the absolute nuclear target polarization using the BRP with the accuracy required for achieving the above beam polarization precision, will be addressed in forthcoming work.

III. THE HYPERFINE STRUCTURE OF HYDROGEN

The hydrogen atom's hyperfine structure arises from the magnetic interaction between the proton and electron spins. This coupling creates an energy landscape that is exquisitely sensitive to external magnetic fields—both static and time-varying. Understanding this structure is essential

because beam-induced rf fields can resonantly drive transitions between these levels, potentially destroying the nuclear polarization that the target provides for absolute beam polarimetry. The beam bunch structure generates time-varying electromagnetic fields that can resonantly drive hyperfine transitions in the hydrogen target, leading to depolarization of the target atoms.

A. Breit-Rabi energy levels and field dependence

In the absence of an external magnetic field, the ground state of hydrogen exhibits hyperfine structure due to the interaction between the electron and nuclear spins [42–44], resulting in two energy levels: a higher-energy triplet state with total angular momentum $F = 1$ (threefold degenerate with $m_F = -1, 0, +1$) and a lower-energy singlet state with $F = 0$ ($m_F = 0$). When an external magnetic field is applied, the degeneracy of the $F = 1$ level is lifted through the Zeeman effect, splitting it into three distinct energy levels corresponding to the three possible values of m_F . The $F = 0$ state, having no magnetic moment in the coupled representation, shifts in energy but remains a single level. This magnetic field-induced splitting transforms the original two-level system into the four energy levels $|1\rangle, |2\rangle, |3\rangle$, and $|4\rangle$.

These four hyperfine states can be precisely defined in the uncoupled basis $\{|m_J, m_I\rangle\}$ where both the electron and nuclear spin projections $m_J, m_I = \pm \frac{1}{2}$ are specified independently,

$$\begin{aligned} |1\rangle &= \left| +\frac{1}{2}, +\frac{1}{2} \right\rangle = |e^\uparrow p^\uparrow\rangle \quad (m_F = +1) \\ |2\rangle &= \left| +\frac{1}{2}, -\frac{1}{2} \right\rangle = |e^\uparrow p^\downarrow\rangle \quad (m_F = 0) \\ |3\rangle &= \left| -\frac{1}{2}, -\frac{1}{2} \right\rangle = |e^\downarrow p^\downarrow\rangle \quad (m_F = -1) \\ |4\rangle &= \left| -\frac{1}{2}, +\frac{1}{2} \right\rangle = |e^\downarrow p^\uparrow\rangle \quad (m_F = 0), \end{aligned} \quad (5)$$

where $m_F = m_J + m_I$ is the total magnetic quantum number, and the arrow notation indicates the relative orientation of electron (e) and nuclear (p) spins. States $|1\rangle$ and $|3\rangle$ have definite total angular momentum $F = 1$ with $m_F = +1$ and $m_F = -1$, respectively, while states $|2\rangle$ and $|4\rangle$, both having $m_F = 0$, form a coupled system that mixes under the influence of external magnetic fields.

The energy levels of these states in an external magnetic field can be quantitatively described by the Breit-Rabi formula [45]. For an atom with total electron angular momentum $J = \frac{1}{2}$ and nuclear spin $I = \frac{1}{2}$, the energy levels are given by

$$E_{F, m_F}(B) = -\frac{E_{\text{hfs}}}{4} + g_I \mu_N m_I B \pm \frac{E_{\text{hfs}}}{2} \sqrt{1 + 2m_F x + x^2}, \quad (6)$$

where $E_{\text{hfs}} = hf_{\text{hfs}}$ is the zero-field hyperfine splitting, g_I is the nuclear g -factor of the proton, μ_N is the nuclear magneton, $m_I = \pm \frac{1}{2}$ is the nuclear spin projection, and m_F is the magnetic quantum number of the total angular momentum F . The \pm sign corresponds to the $F = 1$ (upper sign) and $F = 0$ (lower sign) hyperfine levels. The dimensionless field strength parameter x is defined as

$$x = \frac{g_J \mu_B B}{E_{\text{hfs}}}, \quad (7)$$

where g_J is the electron g -factor and μ_B is the Bohr magneton (see Table I for numerical values). The first term in Eq. (6) represents the zero-field energy offset, the second term describes the nuclear Zeeman effect (interaction of the nuclear magnetic moment with the external field), and the square root term captures the combined hyperfine and electron Zeeman interactions.

The ground-state hyperfine splitting in hydrogen is known with exceptional precision. A recent measurement yielded

$$f_{\text{hfs}} = (1420405748.4 \pm 3.4_{\text{stat}} \pm 1.6_{\text{syst}}) \text{ Hz}, \quad (8)$$

as reported in Ref. [27]. In energy units, using the measured hyperfine frequency f_{hfs} and Planck's constant h from Table I, the hyperfine splitting energy is given by

$$E_{\text{hfs}} = \frac{hf_{\text{hfs}}}{e} = 5.87432617 \times 10^{-6} \text{ eV}. \quad (9)$$

The magnetic field B_c at which the Zeeman interaction equals the hyperfine interaction (i.e., $x = 1$) is

$$B_c = \frac{E_{\text{hfs}}}{g_J \mu_B} \approx 50.684 \text{ mT}, \quad (10)$$

where the CODATA 2018 [28] values from Table I for h , e , and m_e were used and the classical definition $\mu_B = e\hbar/(2m_e)$.

For the simplified energy expressions that follow, the nuclear Zeeman term $g_I \mu_N m_I B$ in Eq. (6) is omitted since it is negligible compared to the hyperfine and electron Zeeman interactions (the nuclear magneton is approximately 1836 times smaller than the Bohr magneton). The hyperfine energies, whose complete derivation is presented in Appendix B, can be written as

$$\begin{aligned}
 E_{|1\rangle}(x) &= \frac{E_{\text{hfs}}}{2} \left(-\frac{1}{2} + (1+x) \right), \\
 E_{|2\rangle}(x) &= \frac{E_{\text{hfs}}}{2} \left(-\frac{1}{2} + \sqrt{1+x^2} \right), \\
 E_{|3\rangle}(x) &= \frac{E_{\text{hfs}}}{2} \left(-\frac{1}{2} + (1-x) \right), \\
 E_{|4\rangle}(x) &= \frac{E_{\text{hfs}}}{2} \left(-\frac{1}{2} - \sqrt{1+x^2} \right),
 \end{aligned} \tag{11}$$

where the different states are labeled according to their total and magnetic quantum numbers $|F, m_F\rangle$, as shown in Fig. 4. As the external field increases, the relevant quantum numbers change from the coupled representation F, m_F to the uncoupled basis m_I, m_J . The expressions in Eq. (11) are valid for all magnetic field strengths, transitioning smoothly from the weak-field Zeeman regime ($x \ll 1$) through the intermediate regime to the strong-field Paschen-Back limit ($x \gg 1$). In the high-field (Paschen-Back) limit, the eigenstates effectively become pure product states of nuclear and electron spin projections.

The nuclear target polarization of each hyperfine state also depends on the magnetic field strength through the parameter x . As derived in Appendix B, the field-dependent nuclear polarizations are given by

$$\begin{aligned}
 Q_{|1\rangle}(x) &= +1 \quad (\text{constant}), \\
 Q_{|2\rangle}(x) &= -\frac{x}{\sqrt{1+x^2}}, \\
 Q_{|3\rangle}(x) &= -1 \quad (\text{constant}), \\
 Q_{|4\rangle}(x) &= +\frac{x}{\sqrt{1+x^2}},
 \end{aligned} \tag{12}$$

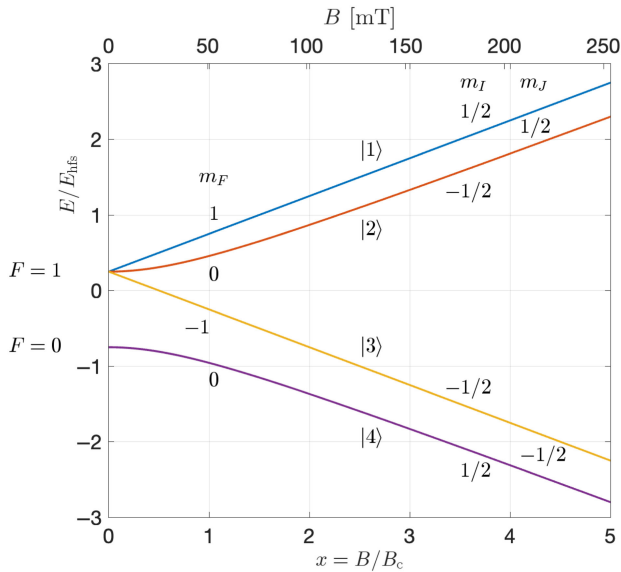


FIG. 4. Hyperfine energy levels of hydrogen $|1\rangle$ to $|4\rangle$ labeled with their quantum numbers F, m_F, m_I, m_J vs magnetic field, using Eq. (11) with E_{hfs} from Eq. (9) and B_c from Eq. (10). The bottom axis is in units of $x = B/B_c$, the top axis gives B in mT.

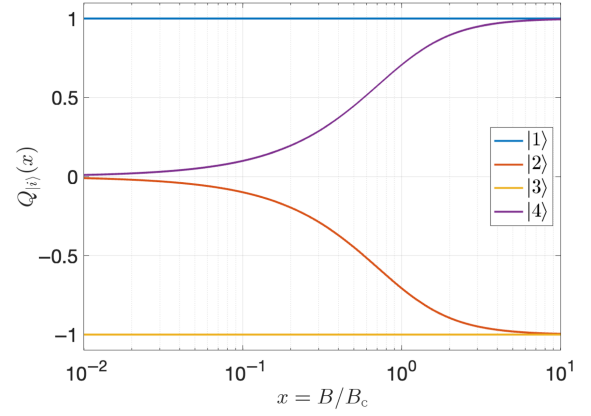


FIG. 5. Nuclear target polarization of hydrogen hyperfine states as a function of the dimensionless magnetic field parameter $x = B/B_c$, as given by Eq. (12). States $|1\rangle$ and $|3\rangle$ maintain constant nuclear polarizations of $+1$ and -1 , respectively, at all field strengths. The mixed states $|2\rangle$ and $|4\rangle$ exhibit field-dependent polarizations that evolve from 0 in the weak-field limit ($x \rightarrow 0$) to ± 1 in the strong-field limit ($x \rightarrow \infty$).

and are depicted in Fig. 5. States $|1\rangle$ and $|3\rangle$ maintain constant nuclear polarizations of $+1$ and -1 , respectively, while the mixed states $|2\rangle$ and $|4\rangle$ exhibit field-dependent polarizations that evolve from 0 in the weak-field limit to ± 1 in the strong-field limit.

B. Hyperfine transition frequencies in hydrogen

As the magnetic field increases, the energies of the hyperfine states evolve, leading to field-dependent transition frequencies between them. The energies $E_{|i\rangle}(B)$ entering these transitions are given by the parametrization in Eq. (11), expressed as a function of the dimensionless parameter x , defined in Eq. (7). The transition frequency between two hyperfine states $|i\rangle$ and $|j\rangle$ is then given by

$$f_{ij}(B) = \frac{E_{|i\rangle}(B) - E_{|j\rangle}(B)}{h}. \tag{13}$$

There are six allowed transitions between the four hyperfine states. Following the classification scheme [46] introduced by Ramsey [42] (p. 242), they are grouped according to the orientation of the rf field B_1 relative to the static magnetic field B_0 and the associated selection rules: (1) π -transitions ($B_1 \perp B_0$): These occur within the same F multiplet and obey $\Delta F = 0$, $\Delta m_F = \pm 1$. The two π -transitions are: (i) f_{12}^π : between $|1\rangle$ and $|2\rangle$ and (ii) f_{23}^π : between $|2\rangle$ and $|3\rangle$. (2) σ -transitions ($B_1 \parallel B_0$): These occur between different F multiplets and satisfy $\Delta F = \pm 1$, $\Delta m_F = 0, \pm 1$. The three σ -transitions are: (i) f_{14}^σ : between $|1\rangle$ and $|4\rangle$; (ii) f_{24}^σ : between $|2\rangle$ and $|4\rangle$; and (iii) f_{34}^σ : between $|3\rangle$ and $|4\rangle$. (3) Two-photon transition ($\Delta m_F = 2$): Forbidden as a single-photon process due to selection rules, this transition can occur through two-photon absorption:

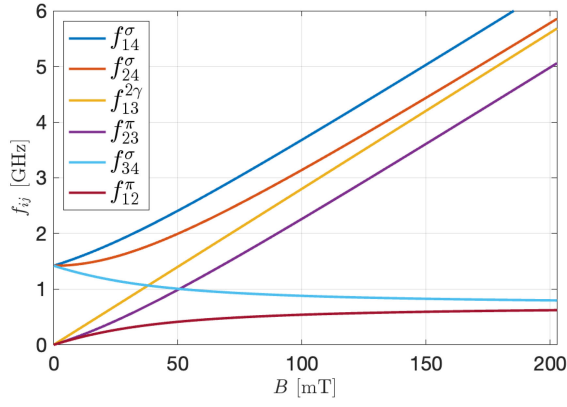


FIG. 6. Magnetic-field dependence of the transition frequencies $f_{ij}(B)$ between the hydrogen hyperfine states, calculated using Eq. (13). The transitions are labeled as f_{ij}^π , f_{ij}^σ , or $f_{ij}^{2\gamma}$ according to their selection rules and field orientation. All frequencies are shown in GHz as a function of the magnetic field up to $4B_c$.

(i) $f_{13}^{2\gamma}$: between $|1\rangle$ and $|3\rangle$.

These six transition frequencies, representing all possible transitions between the four hyperfine states, are plotted in Fig. 6 as a function of magnetic field up to $4B_c$.

C. RHIC hydrogen jet target operation

In the polarized hydrogen jet target, atoms are prepared in specific hyperfine state combinations by the atomic beam source, typically $|1\rangle + |4\rangle$ or $|2\rangle + |3\rangle$. These particular combinations are chosen because they maximize atomic beam intensity while maintaining high polarization, as the nuclear polarization components of these states are nearly identical, allowing efficient population of both states without significant polarization loss.

The RHIC hydrogen jet target operates at a nominal holding field of $B_0 = 120$ mT ($\approx 2.4B_c$), placing it in the regime where hyperfine and Zeeman interactions are comparable. The efficiencies (or transmissions) of the atomic hyperfine states being transported in the magnetic focusing system of the source to the interaction point depend on the effective magnetic moments [47]. The BRP measures the relative populations of the hyperfine states in the beam to determine the target polarization. Thus states $|2\rangle$ and $|4\rangle$, which have field-dependent effective magnetic moments (as evident from the varying slopes in Fig. 4), experience different transmission efficiencies in the ABS compared to states $|1\rangle$ and $|3\rangle$ with constant effective magnetic moments, altering the target polarization even under idealized conditions. Any process that redistributes these populations—such as beam-induced rf transitions—directly affects the nuclear target polarization and thus the accuracy of absolute proton beam polarimetry. The transition frequencies calculated above establish which rf field components from the circulating beam can resonantly drive such depolarizing transitions.

IV. TEMPORAL EVOLUTION AND SPECTRAL PROPERTIES OF BEAM-INDUCED MAGNETIC FIELDS AT RHIC

Electromagnetic fields generated by the circulating beam bunches are the primary drivers of potential depolarization in the hydrogen target, as they can resonantly excite hyperfine transitions when their frequency components match the transition frequencies discussed in Sec. III.

For the RHIC analysis presented in this section, we focus exclusively on flattop operation at 255 GeV for two practical reasons. First, there is very limited experimental data available for nuclear target polarization measurements at injection energy due to insufficient statistics, whereas at flattop the polarized hydrogen target has been operated continuously throughout the typically 8-h store duration. Second, the transverse beam size at injection is generally larger than at flattop by approximately a factor of $\approx \sqrt{\gamma_{\text{flat}}/\gamma_{\text{inj}}} \approx \sqrt{255 \text{ GeV}/23.5 \text{ GeV}} \approx \sqrt{11}$, resulting in correspondingly smaller magnetic field amplitudes at the target location. The flattop analysis therefore represents the more critical scenario and establishes a well-characterized benchmark for comparison with the EIC conditions analyzed in Sec. VI.

The analysis proceeds by first characterizing the temporal structure of individual bunches and the resulting periodic pulse train, then deriving the frequency-domain spectrum that determines which hyperfine transitions can be resonantly driven by the beam-induced fields.

A. Bunch time structure and pulse shape

At RHIC, the circulating beam is composed of $N_b = 120$ equally spaced bunches, each containing approximately $N_p = 2 \times 10^{11}$ protons. For the present discussion, the abort gap is neglected. The longitudinal profile of each individual bunch is approximated by a Gaussian current distribution in time,

$$I_b(t) = \frac{Q_b}{\sqrt{2\pi}\sigma_t} \exp\left(-\frac{t^2}{2\sigma_t^2}\right), \quad (14)$$

where $Q_b = N_p e$ is the total bunch charge and σ_t is the temporal width of the bunch. For RHIC at top energy, the bunch length is approximately $\sigma_L = 0.55$ m in the lab frame, which yields a time-domain width of

$$\sigma_t = \frac{\sigma_L}{\beta c}, \quad (15)$$

with $\beta \approx 1$. This corresponds to a temporal bunch width of $\sigma_t \approx 1.84$ ns, and, using Eq. (14), a peak current of a single bunch of $I_b^{\text{pk}} = Q_b/(\sqrt{2\pi}\sigma_t) \approx 6.97$ A for RHIC flattop parameters.

The full set of machine and bunch parameters is summarized in Table II. A graphical representation of

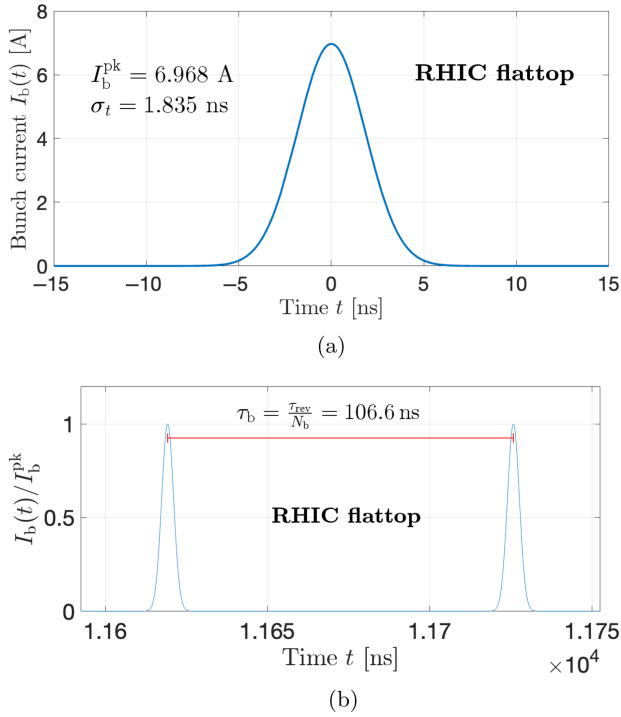


FIG. 7. Temporal current profiles of RHIC bunches on flattop at 255 GeV. Panel (a) Single Gaussian bunch current profile $I_b(t)$ from Eq. (14) with Gaussian width t and bunch charge Q , as listed in Table II. Panel (b) Two consecutive Gaussian bunches, separated by the nominal bunch spacing τ_b .

the bunch current profile is shown in Fig. 7(a), illustrating the temporal shape used in subsequent frequency-domain analyses. Figure 7(b) shows two consecutive RHIC bunches at flattop and their temporal spacing.

B. Modeling the bunch train as a periodic source

We begin by analyzing the frequency content of the bunch current and the resulting rf magnetic field spectrum.

Each individual bunch is described by a temporal current distribution $I_b(t)$, as shown in Fig. 7(a). The full beam current $I(t)$ as seen by a stationary observer is modeled as a convolution of the single-bunch profile with a comb of delta functions spaced by the bunch interval τ_b via

$$I(t) = I_b(t) * \sum_{n=-\infty}^{\infty} \delta(t - n\tau_b). \quad (16)$$

The symbol $*$ denotes the convolution operator, defined for two functions $f(t)$ and $g(t)$ as

$$(f * g)(t) = \int_{-\infty}^{\infty} f(t')g(t-t')dt', \quad (17)$$

where t' is a dummy integration variable. In the present context, this operation replicates the single-bunch current profile $I_b(t)$ at each multiple of the bunch spacing τ_b ,

producing a periodic pulse train with a harmonic structure that reflects the bunch frequency $f_b = 1/\tau_b$. Understanding this temporal structure is essential for analyzing the beam-induced radiofrequency fields that can depolarize the atoms in the target.

C. Frequency-domain spectrum of the beam

We now determine the time structure of the circulating beam and its harmonic content by extending the single-bunch description to a periodic bunch train.

The total time-dependent current $I(t)$ of the circulating RHIC beam at flattop is constructed as a convolution of the single-bunch current profile $I_b(t)$ with a Dirac comb $\sum_n \delta(t - n\tau_b)$ of period τ_b , as given in Eq. (16). The convolution of a localized function with a delta train yields a periodic pulse train of the same shape, replicated every τ_b .

Due to the periodicity of the resulting current signal, the spectral content consists of harmonics of the bunch frequency $f_b = 1/\tau_b$, modulated by the Fourier transform of the individual bunch shape.

1. Analytical form of the Gaussian bunch spectrum

The Fourier transform of the Gaussian current distribution from Eq. (14) is well known and yields a Gaussian in the frequency domain, given by

$$\tilde{I}_b(f) = I_b^{\text{pk}} \exp(-2\pi^2 f^2 \sigma_t^2), \quad (18)$$

where f is the frequency and σ_t the bunch width. This can also be written as $\tilde{I}_b(f) = I_b^{\text{pk}} \exp(-f^2/2\sigma_f^2)$ with the frequency-domain width $\sigma_f = 1/(2\pi\sigma_t)$. This expression describes the envelope of the spectral intensity of the bunch pulse train, falling off exponentially with frequency. The full spectrum of the periodic train is thus given by

$$\tilde{I}(f) = \tilde{I}_b(f) \sum_{n=-\infty}^{\infty} \delta(f - nf_b). \quad (19)$$

2. Numerical evaluation of the Fourier spectrum

To validate the analytical result with a numerical calculation, the bunch train signal $I(t)$ was sampled over a time window of $2\tau_{\text{rev}}$ with $N = 10^6$ points. The time resolution and sampling frequency are

$$\Delta t = \frac{2\tau_{\text{rev}}}{N}, \quad f_s = \frac{1}{\Delta t}, \quad (20)$$

where f_s is the sampling frequency. The FFT [48] of the sampled current signal yields a complex-valued spectrum $Y(f_n)$ on the frequency grid

$$f_n = \frac{nf_s}{N}, \quad n = 0, \dots, N/2. \quad (21)$$

TABLE II. Beam bunch and machine parameters for RHIC flattop and EIC injection and flattop nominal conditions. The average beam current I_{avg} corresponds to the equivalent dc current that would deliver the same total charge flow as the bunched beam circulating at revolution frequency f_{rev} . The bottom part lists the transverse beam parameters at the HJET locations in IP 12 (RHIC) and IP 4 (EIC) that is used to evaluate the magnetic field $B(r)$ from the bunch current distribution.

Quantity	Symbol/definition	Unit	RHIC at IP 12		EIC at IP 4
			Flattop	Injection	Flattop
Total beam energy	E_{beam}	GeV	255	23.5	275
Lorentz factor (lab)	β	...	1.0000	0.9992	1.0000
Lorentz factor (lab)	γ	...	271.7762	25.0460	293.0920
Protons per bunch	N_p	10^{10}	20	27.6	6.9
Bunch charge	$Q_b = N_p e$	nC	32.044	44.220	11.055
Number of bunches	N_b	...	120	290	1160
Circumference	L	m		3833.85	
Bunch length (rms)	σ_L	m	0.55	0.24	0.06
Temporal bunch width (rms)	$\sigma_t = \sigma_L / (\beta c)$	ns	1.835	0.801	0.200
Peak current (per bunch)	$I_b^{\text{pk}} = Q_b / (\sqrt{2\pi} \sigma_t)$	A	6.968	22.019	22.036
Revolution time	$\tau_{\text{rev}} = L / (\beta c)$	μs	12.792	12.802	12.792
Revolution frequency	$f_{\text{rev}} = 1 / \tau_{\text{rev}}$	kHz	78.175	78.113	78.175
Bunch spacing	$\tau_b = \tau_{\text{rev}} / N_b$	ns	106.598	44.144	11.027
Bunch frequency	$f_b = 1 / \tau_b$	MHz	9.381	22.653	90.683
Average beam current	$I_{\text{avg}} = N_b N_p e f_{\text{rev}}$	A	0.301	1.002	1.003
Normalized rms emittance (horizontal)	ϵ_x^n	μm	2.5	3.3	3.3
Normalized rms emittance (vertical)	ϵ_y^n	μm	2.5	0.3	0.3
Normalized average rms emittance	$\epsilon_{\text{avg}}^n = \sqrt{\epsilon_x^n \cdot \epsilon_y^n}$	μm	2.5	0.995	0.995
Beta function (horizontal)	β_x	m	5.340 ^a	93.600 ^b	230.323 ^b
Beta function (vertical)	β_y	m	6.190 ^a	39.590 ^b	69.935 ^b
Average beta function	$\beta_{\text{avg}} = \sqrt{\beta_x \beta_y}$	m	5.749	60.874	126.916
Transverse rms beam size (horizontal)	$\sigma_x = \sqrt{\beta_x \epsilon_x^n / (\beta \gamma)}$	mm	...	3.513	1.610
Transverse rms beam size (vertical)	$\sigma_y = \sqrt{\beta_y \epsilon_y^n / (\beta \gamma)}$	mm	...	0.689	0.268
Transverse 95% beam size (horizontal)	$\sigma_x^{95} = \sigma_x \cdot \sqrt{5.993}$	mm	...	8.600	3.942
Transverse 95% beam size (vertical)	$\sigma_y^{95} = \sigma_y \cdot \sqrt{5.993}$	mm	...	1.686	0.655
Radial rms beam size	$\sigma_r = \sqrt{\sigma_x \sigma_y}$	mm	0.23	1.566	0.656
Radial beam size (95%)	$\sigma_r^{95} = \sigma_r \cdot \sqrt{5.993}$	mm	0.56	3.808	1.607

^aIn RHIC run 22, the β functions at the location of the HJET in IP 12 were determined by Guillaume Robert-Demolaize in January 2022.

^bValues for the future location of the HJET in IP 4 were generated by Henry Lovelace III for flattop (July 2024) and injection (May 2025).

From this, we define the two-sided amplitude spectrum

$$P_2(f) = \frac{1}{N} |\text{FFT}[I(t)]| \quad (22)$$

and the one-sided amplitude spectrum for positive frequencies,

$$P_1(f) = \begin{cases} P_2(f), & f = 0, \\ 2P_2(f), & f > 0. \end{cases} \quad (23)$$

To assess consistency with the analytical model, we normalize both $P_1(f)$ and the envelope $\tilde{I}_b(f)$ to their respective maxima and overlay them.

Figure 8 confirms that the numerical FFT closely follows the analytic envelope $\tilde{I}_b(f)$ over more than an order-of-

magnitude. The peaks shown in the inset appear at integer multiples of f_b , labeled by their harmonic number $n = f/f_b$, as expected from the periodic pulse structure. The FFT result shown in Fig. 8 is proportional to the spectral amplitude of the rf magnetic field $B(f)$ generated by the bunched beam at the target. The y axis is labeled as B/B_{max} to reflect the normalization. For depolarization processes, however, the number of rf photons is proportional to the field power $|B(f)|^2$, i.e., the square of the displayed quantity.

3. Resolution limit of the discrete spectrum

The frequency resolution $\Delta f = f_s/N$ in this analysis is governed by the total time window $T = N\Delta t$, so that

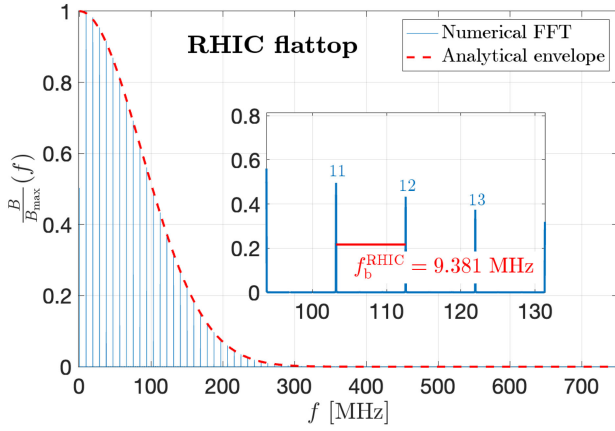


FIG. 8. Comparison of the numerically obtained one-sided normalized FFT amplitude spectrum (blue) of the rf magnetic field $B(f)$ with the analytical envelope (dashed red) from Eq. (18) for the conditions on RHIC flattop. The frequency axis is shown in MHz. Harmonic numbers $n = f/f_b$ are labeled near the peaks. The numerically computed bunch repetition frequency f_b^{RHIC} in the inset agrees well with the analytically calculated one from Table II.

$$\Delta f = \frac{1}{T} = 39.1 \sim \text{kHz} \quad (24)$$

for the chosen parameters, providing approximately 240 frequency bins per harmonic spacing of f_b and adequate resolution to identify the resonance conditions within ± 19 kHz required for hyperfine transition analysis. Sufficient spectral resolution requires a long sampling interval in time, whereas frequency coverage is determined by the sampling rate f_s .

V. BEAM-INDUCED DEPolarIZATION OF HYDROGEN AT RHIC

We now examine how the rf spectrum of the circulating RHIC beam interacts with the internal hyperfine structure of hydrogen atoms in the target. The analysis evaluates resonance conditions, calculates photon emission rates, determines spatial field distributions, and assesses the impact on target polarization to establish operational safety thresholds.

The RHIC flattop conditions analyzed in this section serve to develop and validate the computational framework, which is subsequently applied to EIC injection and flattop scenarios in Sec. VI.

A. Hyperfine transitions and resonance conditions

The bunched proton beam at RHIC generates a broadband spectrum of time-varying electromagnetic fields that can resonantly drive transitions between hyperfine levels in hydrogen atoms. These transitions are induced primarily by the magnetic component of the beam's rf field, which couples to the magnetic dipole moments of the atom.

The depolarization of atomic hydrogen in the presence of the RHIC beam arises when the frequency of a beam-induced rf magnetic field matches a hyperfine transition frequency $f_{ij}(B)$ at a given holding field B . Since the beam spectrum consists of discrete harmonics of the bunch frequency $f_b \approx 9.381$ MHz, resonant transitions are possible when

$$f_{ij}(B) = n f_b, \quad n \in \mathbb{N}. \quad (25)$$

Figure 6 shows the field dependence of the six hyperfine transition frequencies in absolute units (GHz). These cover a range from below 0.1 GHz up to 6 GHz as B varies from 0 to 200 mT. Not all six hyperfine transitions shown in Fig. 6 contribute to depolarization. Transitions that leave the nuclear spin quantum number m_I unchanged, such as $|1\rangle \leftrightarrow |4\rangle$ and $|2\rangle \leftrightarrow |3\rangle$, do not affect the hydrogen nuclear polarization in the target and are therefore excluded from further analysis. However, when analyzing the polarization of the ensemble using the BRP, the transitions between states with the same nuclear spin must be considered, as they affect the transmission through the sextupole magnets, and thus the polarization measurement in the BRP.

To identify potential depolarization resonances, we evaluate the magnetic-field dependence of the remaining four transitions and express them both in absolute units (GHz) and in terms of the harmonic number $n = f_{ij}/f_b$, relative to the RHIC bunch frequency $f_b \approx 9.381$ MHz. The visualization in Fig. 9 illustrates where resonant conditions are met. For example, at the magnetic field of $B_0 \approx 120$ mT where the hydrogen jet target is operated, multiple transitions such as f_{12}^π , $f_{13}^{2\gamma}$, and f_{34}^σ lie within a

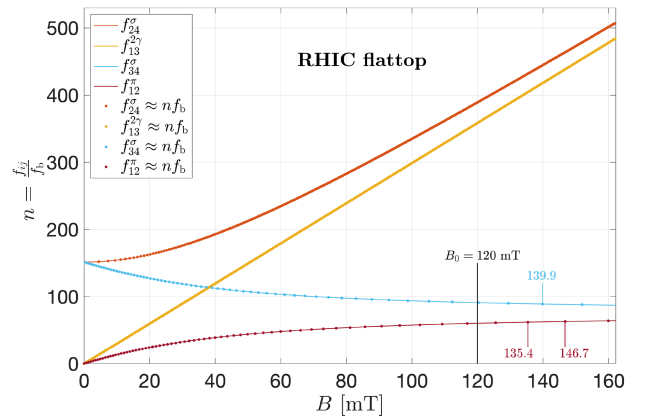


FIG. 9. Hyperfine transition frequencies $f_{ij}(B)$ expressed as harmonic numbers $f_{ij}(B)/f_b$, relevant for the RHIC bunch structure (Fig. 7). Dots indicate resonance points where the transition frequency satisfies $f_{ij}(B) \approx n f_b$ within a tolerance of 0.002, corresponding to harmonic overlap with the bunch spectrum. In the vicinity of the static magnetic holding field $B_0 = 120$ mT, the spacing between adjacent relevant resonance points is approximately 4 mT.

few MHz of a beam harmonic. Such coincidences open depolarization channels, provided the rf spectral power at the corresponding harmonic is sufficiently large.

To visualize these resonant conditions, the harmonic number $n = f_{ij}(B)/f_b$ is plotted as a function of B for each relevant hyperfine transition. Discrete markers highlight those magnetic field values where the transition frequency closely matches an integer multiple of the bunch frequency, specifically when

$$\left| \frac{f_{ij}(B)}{f_b} - m \right| < 0.002, \quad \text{with } m \in \mathbb{Z}. \quad (26)$$

These resonance conditions establish which hyperfine transitions can potentially be driven by the beam spectrum, but do not determine whether sufficient rf power exists at those frequencies to cause significant depolarization.

B. Photon emission rate and spectral thresholds

Having identified the resonance conditions for hyperfine transitions, we now estimate whether the beam-induced rf field carries sufficient power at those frequencies to induce significant depolarization.

1. Theoretical framework and broadening effects

The frequency-domain envelope of the bunch train is governed by the Fourier transform of the single-bunch Gaussian profile, given in Eq. (18). This describes the spectral amplitude $\tilde{I}_b(f)$ in terms of the peak bunch current I_b^{pk} and the rms bunch width σ_t , and determines the harmonic content of the rf fields generated by the circulating beam.

To convert this current spectrum into a magnetic field amplitude spectrum $B(f)$ at a transverse distance r from the beam axis, we use the expression

$$B(f) = \frac{\mu_0}{2\pi r} I(f), \quad (27)$$

where $\mu_0 = 4\pi \times 10^{-7}$ H/m is the permeability of free space. The expression for $B(f)$ follows from the Biot-Savart law for a straight current element at distance r from the beam axis.

The energy density associated with the magnetic field amplitude at frequency f is given by

$$u(f) = \frac{B(f)^2}{\mu_0}, \quad (28)$$

so that the photon emission rate per unit bandwidth becomes

$$\dot{N}_\gamma(f) = \frac{u(f)}{hf} \frac{V_{\text{int}}}{\tau_{\text{int}}} = \frac{1}{\mu_0} \frac{B(f)^2}{hf} \frac{V_{\text{int}}}{\tau_{\text{int}}}. \quad (29)$$

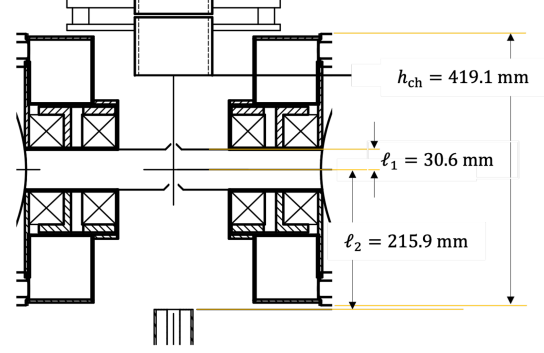


FIG. 10. Side view of the RHIC target chamber to illustrate the interaction volume (see also Fig. 2). The atomic beam enters from the top. The height of the target chamber is $h_{\text{ch}} = 419.1$ mm. The distance between the exit of the rf transition unit in the ABS and the RHIC beam amounts to $\ell_1 = 30.6$ mm. The beam is assumed to have a transverse radius of ≈ 5 mm as it travels downward into the BRP.

Here $V_{\text{int}} = L_{\text{int}} \pi r_{\text{at.beam}}^2 \approx 2.40 \times 10^{-6}$ m³ is the effective interaction volume swept out by the atomic beam of radius $r_{\text{at.beam}} = 5$ mm along the interaction length $L_{\text{int}} = \ell_1 = 30.6$ mm in the upper half of the RHIC target chamber (see Fig. 10). The interaction time is $\tau_{\text{int}} = L_{\text{int}}/v_{\text{atom}}$ and the atomic beam velocity $v_{\text{atom}} \approx 1807$ m/s [49], yielding $\tau_{\text{int}} \approx 17$ μ s.

In this approximation, we neglect both the velocity distribution of the atomic beam and the finite width of the hyperfine resonances, treating transitions as occurring at discrete harmonic frequencies with a single representative atomic velocity v_{atom} .

However, these previously neglected effects introduce significant broadening mechanisms that influence the resonance conditions. For hydrogen atoms emitted from a thermal source at temperature $T = 80$ K, the Maxwell-Boltzmann velocity distribution

$$f(v) = \sqrt{\frac{2}{\pi}} \left(\frac{m_{\text{H}}}{k_{\text{B}} T} \right)^{3/2} v^2 \exp\left(-\frac{m_{\text{H}} v^2}{2k_{\text{B}} T}\right), \quad (30)$$

where m_{H} is the mass of the hydrogen atom, and k_{B} the Boltzmann constant (Table I), which yields a thermal velocity spread along the beam axis with standard deviation

$$\sigma_{\text{thermal}} = \sqrt{\frac{k_{\text{B}} T}{m_{\text{H}}}} = 812 \text{ m/s}. \quad (31)$$

This velocity distribution results in Doppler broadening of the transition frequency with standard deviation

$$\sigma_f^{\text{Doppler}} = f_0 \frac{\sigma_{\text{thermal}}}{c} \approx f_0 2.71 \times 10^{-6}. \quad (32)$$

For the hyperfine transition at $f_0 = 1.42$ GHz, this yields

$$\sigma_f^{\text{Doppler}} \approx 3.85 \text{ KHz.} \quad (33)$$

Additionally, power broadening arises when the rf magnetic field induces magnetic moment precession at the Rabi frequency

$$f_{\text{Rabi}} = \gamma_{\text{H}} B_1 = \frac{g_J \mu_B B_1}{2\pi \hbar}, \quad (34)$$

where $B_1 = 200 \mu\text{T}$ represents the rf field amplitude averaged over the frequency spectrum (approximately 3σ of the Gaussian envelope shown in Fig. 8), accounting for the range of frequencies that contribute to power broadening and $\gamma_{\text{H}}/2\pi \approx 28.025 \text{ GHz T}^{-1}$ is the gyromagnetic ratio of the hydrogen ground state (Table I). This yields a precession frequency of

$$f_{\text{Rabi}} \approx 5.61 \text{ MHz.} \quad (35)$$

For consistent treatment with the Doppler contribution, the effective power broadening is expressed as a standard deviation via $\sigma_f^{\text{power}} = f_{\text{Rabi}}/(2\sqrt{2 \ln 2})$, so that the combined effective linewidth, assuming Gaussian contributions, is given by

$$\sigma_f^{\text{total}} = \sqrt{(\sigma_f^{\text{Doppler}})^2 + (\sigma_f^{\text{power}})^2} \approx 2.38 \text{ MHz.} \quad (36)$$

This broadening has implications for the harmonic analysis and leads to a fundamental limitation of our approach. The discrete harmonic method identifies resonance conditions by requiring exact frequency matches between hyperfine transition frequencies and beam harmonic frequencies. Since our analysis only flags exact frequency matches, it provides a lower bound on depolarization risks by not accounting for these near-resonant effects.

The implications for the harmonic spacing are favorable: while the 2.38 MHz linewidth is much larger than the precision required for exact matching, it remains small compared to the harmonic spacing (9.381 MHz), ensuring that neighboring harmonics do not overlap. This validates the discrete harmonic approach while acknowledging that additional transitions within 2.38 MHz of any harmonic frequency could exhibit resonant behavior beyond what our threshold determination captures.

2. Quantitative analysis and threshold determination

We now apply the theoretical framework developed above to calculate the actual photon emission rates and determine depolarization thresholds for RHIC operating conditions.

To account for the vertical variation of the azimuthal magnetic field along the atomic flight path in the upper half of the chamber, the field amplitude $B(f)$ in Eq. (29) is replaced by its vertical average $\langle B(f) \rangle$, defined as

$$\langle B(f) \rangle = \frac{1}{L_{\text{int}}} \int_0^{L_{\text{int}}} B(f, r) dr, \quad (37)$$

so that $B(f)^2 \rightarrow \langle B(f) \rangle^2$ in Eq. (29). This averaging is necessary because atoms travel through regions of varying magnetic field strength along their vertical flight path toward the target region (see Fig. 10).

To obtain the total time-averaged photon flux of the full circulating beam from Eq. (29), the spectral emission rate must be scaled by the effective duty cycle. Defining the average photon emission rate as $\dot{N}_\gamma^{\text{avg}}(f)$, we write

$$\dot{N}_\gamma^{\text{avg}}(f) = \dot{N}_\gamma(f) f_b \tau_t, \quad (38)$$

where f_b is the bunch repetition frequency (Table II) and $\tau_t = 2\sqrt{2 \ln 2} \sigma_t \approx 4.32 \text{ ns}$ is the FWHM of the temporal bunch duration. This correction reflects the fact that significant magnetic field amplitudes exist only during the brief bunch passage. The result, $\dot{N}_\gamma^{\text{avg}}(f)$, represents the physically relevant time-averaged spectral photon rate, i.e., a spectral photon density with units of [photons/s/Hz]. To determine the total photon rate relevant for depolarization, this spectral density must be converted to a total rate by multiplying by the effective resonance linewidth σ_f^{total} from Eq. (36),

$$\dot{N}_{\gamma, \text{total}}^{\text{avg}}(f) = \dot{N}_\gamma^{\text{avg}}(f) \times \sigma_f^{\text{total}}. \quad (39)$$

This total rate [photons/s] can then be directly compared to depolarization thresholds established below.

The result of this calculation is shown in Fig. 11, where the left axis displays the photon emission rate $\dot{N}_{\gamma, \text{total}}^{\text{avg}}(f)$, and the right axis shows the corresponding averaged magnetic field amplitude $\langle B(f) \rangle$ [Eq. (37)]. To induce significant depolarization, the photon emission rate at a given harmonic must be high enough to affect a non-negligible fraction of atoms present in the interaction volume at any given moment. Based on typical HJET operating conditions, the atomic flux through the interaction region is $\Phi = (12.4 \pm 0.2) \times 10^{16} \text{ atoms/s}$ with a jet target thickness along the RHIC beam of $(1.3 \pm 0.2) \times 10^{12} \text{ atoms/s}^2$ [29]. Given the atomic flux Φ and a beam transit time through the interaction region of τ_{int} from above, the instantaneous number of atoms in the chamber is

$$N_{\text{atoms}} = \Phi \tau_{\text{int}} \approx 2.1 \times 10^{12}. \quad (40)$$

To achieve 1% depolarization, representing a measurable change that would significantly impact the nuclear target polarization and exceed the systematic

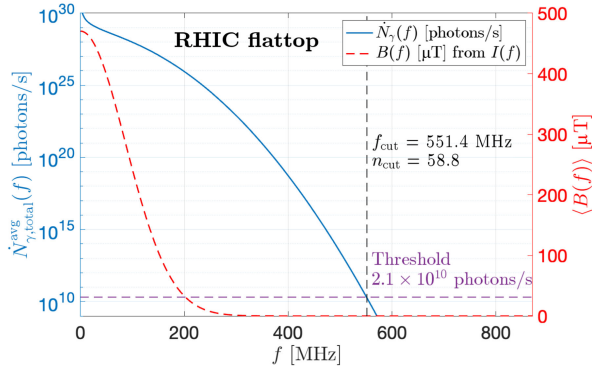


FIG. 11. Photon emission rate $\dot{N}_{\gamma,\text{total}}^{\text{avg}}(f)$ from Eq. (39) (left axis, blue line) and corresponding rf magnetic field amplitude $\langle B(f) \rangle$ from Eq. (37) (right axis, dashed line), derived from the analytical Gaussian RHIC bunch envelope. The dashed horizontal line marks the threshold of 2.1×10^{10} photons/s required to depolarize 1% of the atoms in the beam. The vertical line marks the cutoff frequency $f_{\text{cut}} = 551.4$ MHz and harmonic number $n_{\text{cut}} = 58.8$ where the photon rate drops below the depolarization threshold.

uncertainties required for EIC, a photon rate of at least 2.1×10^{10} photons/s is required at resonance. This value sets a threshold, which is shown as a reference line in Fig. 11.

For RHIC flattop, the intersection point where the photon emission rate $\dot{N}_{\gamma,\text{total}}^{\text{avg}}(f)$ drops below the threshold occurs at a frequency $f_{\text{cut}} \approx 551.4$ MHz, corresponding to harmonic number $n_{\text{cut}} \approx 59$. Above this frequency, the photon flux is insufficient to depolarize a significant fraction of the atomic beam, making higher harmonics increasingly ineffective. However, this estimate involves uncertainties: unfortunately, no dedicated polarization measurements with the BRP and varying magnetic holding field have been performed at RHIC with stored beam to locate the true depolarization onset, and transient beam-induced fields may locally shift atoms into resonance. The following section provides a quantitative estimate of the relevant magnetic fields in the interaction region.

C. Instantaneous magnetic field at the target

We now quantify the instantaneous magnetic field generated by the beam bunch as it passes the atomic target, based on the spatial current distribution of the beam.

To estimate the magnetic field amplitude experienced by atoms in the target due to the circulating beam, we model the transverse distribution of a single bunch as a two-dimensional Gaussian

$$\rho(x, y) = \frac{1}{2\pi\sigma_x\sigma_y} \exp\left(-\frac{x^2}{2\sigma_x^2} - \frac{y^2}{2\sigma_y^2}\right), \quad (41)$$

where $\sigma_{x,y}$ are the horizontal and vertical rms beam sizes at the interaction point. This expression allows for

asymmetric (elliptical) beams; the round-beam case corresponds to $\sigma_x = \sigma_y \equiv \sigma_r$.

Assuming that the longitudinal and transverse distributions factorize and the beam propagates along the z axis, the current density becomes

$$\vec{J}(x, y, z, t) = \vec{e}_z I_b(t) \rho(x, y), \quad (42)$$

where $I_b(t)$ is the time-dependent longitudinal bunch current profile, defined in Eq. (14) with peak current I_b^{pk} from Table II.

1. Round beam profiles

We distinguish between round and elliptic transverse beam profiles to evaluate how the bunch geometry influences the spatial dependence of the magnetic field at the target.

The magnetic field at a transverse point $\vec{r} = (x, y)$ (e.g., where an atom in the target is located) is obtained from the Biot-Savart law,

$$\vec{B}(\vec{r}, t) = \frac{\mu_0}{4\pi} \int \frac{\vec{J}(\vec{r}') \times (\vec{r} - \vec{r}')}{|\vec{r} - \vec{r}'|^3} d^3 r', \quad (43)$$

which yields a magnetic field $\vec{B} = B(r, t) \vec{e}_\phi$, oriented in the azimuthal direction \vec{e}_ϕ , which is defined by the right-hand rule as $\vec{e}_\phi = \vec{e}_z \times \vec{e}_r$. This results in

$$\vec{B}(r, t) = \frac{\mu_0}{2\pi r} I_b(t) F(r) \vec{e}_\phi, \quad (44)$$

where $F(r)$ is a dimensionless geometric correction factor that accounts for the spatial extension of the transverse beam distribution. For a round Gaussian beam, $F(r)$ can be evaluated analytically via

$$F(r) = 1 - \exp\left(-\frac{r^2}{2\sigma_r^2}\right), \quad (45)$$

with $\sigma_r = \sigma_x = \sigma_y$. In the limit $r \gg \sigma_r$, the expression reduces to the standard Biot-Savart result for a line current,

$$B(r, t) \approx \frac{\mu_0}{2\pi r} I_b(t). \quad (46)$$

To analyze the spectral content, we take the Fourier transform of the time-dependent current profile,

$$B(f, r) = \frac{\mu_0}{2\pi r} I(f) F(r), \quad (47)$$

where $I(f)$ is the current amplitude spectrum defined in Eq. (18).

2. Elliptic beam profiles

In the general case where $\sigma_x \neq \sigma_y$, the beam has an elliptical transverse profile. The Biot-Savart integral in Eq. (43) must be evaluated numerically for arbitrary field points \vec{r} . To handle this more complex geometry efficiently, we employ a vector potential approach.

The magnetic field $\vec{B}(\vec{r})$ generated by a steady current distribution $\vec{J}(\vec{r}')$ can be expressed using the vector potential formalism,

$$\vec{B}(\vec{r}) = \nabla \times \vec{A}(\vec{r}), \quad (48)$$

where the vector potential $\vec{A}(\vec{r})$ satisfies the Poisson equation

$$\nabla^2 \vec{A}(\vec{r}) = -\mu_0 \vec{J}(\vec{r}). \quad (49)$$

For a current flowing in the z direction with a 2D Gaussian transverse profile, the vector potential has only a z component. Using the appropriate Green's function for the 2D Laplacian, this component can be expressed as

$$A_z(\vec{r}) = -\frac{\mu_0}{2\pi} \iint J_z(\vec{r}') \ln \frac{1}{|\vec{r} - \vec{r}'|} dS', \quad (50)$$

where $J_z(\vec{r}')$ is the current density distribution for the elliptical Gaussian beam,

$$J_z(x', y') = I_b \rho(x', y'), \quad (51)$$

with $\rho(x, y)$ as defined in Eq. (41).

The magnetic field components are then obtained from the curl of \vec{A} via

$$B_x = \frac{\partial A_z}{\partial y}, \quad B_y = -\frac{\partial A_z}{\partial x}, \quad B_z = 0. \quad (52)$$

Since the vector potential has only a z component and we are examining the 2D transverse Gaussian current distribution at a fixed instant (at the peak of the bunch), the magnetic field at this moment has no longitudinal component ($B_z = 0$).

This vector potential approach inherently handles the potential singularity in the Biot-Savart law through the naturally regularizing properties of the Gaussian current distribution, while enabling efficient numerical implementation on a discrete grid. Unlike the round-beam case, the resulting magnetic field becomes direction-dependent even at fixed radial distance, making this treatment essential for the elliptical beam profiles expected at the location of the polarized target in IP 4 at the EIC.

D. Spatial field distribution

We now turn to the spatial profile of the peak magnetic field amplitudes at the target, emphasizing their

dependence on beam optics parameters such as emittance and beta function.

To evaluate the magnetic field amplitude $B(f, r)$ experienced at a given transverse offset r , we require knowledge of the transverse beam dimensions σ_x and σ_y . For RHIC, these are derived from the normalized emittance ϵ_n and local beta functions $\beta_{x,y}$ at the present target location at IP 12. The transverse rms beam sizes are given by

$$\sigma_{x,y} = \sqrt{\frac{\beta_{x,y} \epsilon_{x,y}^n}{\beta \gamma}}, \quad (53)$$

where β and γ are the relativistic factors. To convert from rms to 95% normalized emittance, a factor of 5.993 is used in one dimension, as discussed in Ref. [50], so that

$$\epsilon_{x,y}^{n,95} = \epsilon_{x,y}^n 5.933, \quad \text{and} \quad \sigma_{x,y}^{95} = \sigma_{x,y} \sqrt{5.933}. \quad (54)$$

Table II summarizes the relevant beam and optics parameters at IP 12 for RHIC at flattop ($E = 255$ GeV). The normalized rms emittance was taken from the RHIC dashboard during run 22.

Figure 12 shows the peak magnetic flux density $B(r)$ produced by a passing RHIC bunch as a function of transverse distance r from the beam axis, assuming a round Gaussian beam with rmswidth σ_r determined by the beta function and normalized emittance at the HJET location. The curve shows the 255 GeV flattop energy, evaluated at the peak of the bunch distribution ($t = 0$) from Eq. (14). The field drops off approximately as $1/r$ for $r \gg \sigma_r$.

In the vicinity of the nominal holding field $B_0 = 120$ mT, as shown in Fig. 9, the spacing between consecutive resonances for the f_{34}^σ and f_{12}^π transitions is approximately 4 mT. Variations in the holding field can shift the system in and out of resonance with beam

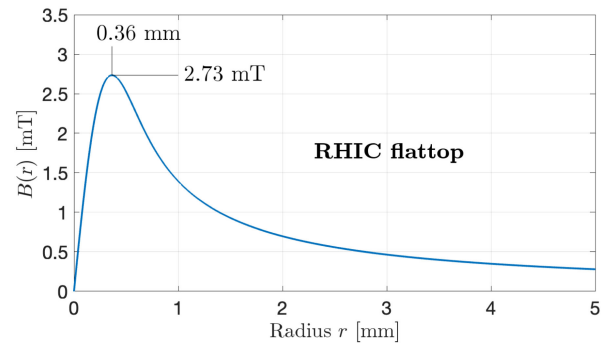


FIG. 12. Peak azimuthal magnetic flux density $B(r)$ produced by a single bunch at RHIC at flattop energy 255 GeV as a function of transverse distance r from the beam center. The field amplitude is evaluated at the peak current using Eq. (44). Vertical and horizontal markers indicate the field maximum and its location.

harmonics, potentially modulating the nuclear depolarization rate of the target.

It is important to note that the target polarization observed in the detector system is determined from many bunches that sequentially intercept the target. Depolarization effects are strongest when the bunch center coincides with the target location, corresponding to the peak of the beam-induced magnetic field. This localized and transient interaction can alter the spin composition of the sample seen by the detectors that measure scattered protons to the left and right of the target. In contrast, the Breit-Rabi polarimeter (BRP) measures the time-averaged spin population of atoms exiting the target chamber and may not resolve short-lived depolarization effects occurring only during bunch passage. Note that this paper does not investigate potential beam-induced effects on the BRP measurement itself.

E. Impact on target polarization

Having established the spatial and spectral characteristics of the beam-induced magnetic field at RHIC flattop, we now assess its impact on the target polarization through its influence on hyperfine transition conditions.

The azimuthal time-dependent magnetic field $\vec{B}(r, t)$ from Eq. (44) generated by the passing beam bunch reaches amplitudes of several mT near the beam axis and varies rapidly across the transverse extension of the atomic beam. This field plays a central role in determining whether hyperfine transitions can be driven resonantly. As shown in Fig. 12, for a circulating RHIC beam at flattop energy of 255 GeV, the peak magnetic field amplitude is $B_{\max} = 2.73$ mT, occurring at a radial distance $r = 0.36$ mm from the beam axis, well within the atomic beam diameter of approximately 10 mm [29], and more importantly, well within the transverse target area sampled by the RHIC beam, for which $\sigma_r^{95\%} = 0.56$ mm (see Table II). This corresponds to the location where the transverse field profile peaks for a round Gaussian beam. The resulting time-dependent rf field must be considered when assessing the proximity of hyperfine transition frequencies to harmonic components in the beam spectrum. For comparison, at RHIC injection energy (23.5 GeV, $\gamma \approx 25.05$), the beam size scales as $\sigma_{x,y} \propto \sqrt{\beta_{x,y} \epsilon_n / (\beta \gamma)}$, so that the radius is approximately $\sqrt{10}$ times larger, substantially reducing the maximum magnetic field amplitudes to about $B_{\max} \approx 0.70$ mT at $r \approx 1.4$ mm.

Since the local magnetic field shifts the hyperfine energy levels, the *resonance condition* for transitions, given in Eq. (25), can be modified *locally* by the presence of the beam-induced magnetic field $\vec{B}(r, t)$, even if the static holding field \vec{B}_0 is uniform. As the bunch passes, atoms at different transverse positions experience different instantaneous total magnetic fields,

$$\vec{B}_{\text{eff}}(r, t) = B_0 \vec{e}_y + B(r, t) \vec{e}_\phi, \quad (55)$$

where $B(r, t)$ is the magnitude of the azimuthal magnetic field from Eq. (44) and B_0 the static holding field from Eq. (1). This superposition of static holding and beam-induced field alters not only the resonance condition for transitions but also the local magnitude and orientation of the magnetic field that defines the spin quantization axis of the nuclear target polarization. As a result, atoms on opposite sides of the beam axis experience different magnetic fields during the bunch passage. Since the hyperfine energy levels—and thus the equilibrium nuclear polarization—depend nonlinearly on the local field strength, these field asymmetries induce small, spatially dependent variations in the target polarization. When the beam-target interaction is perfectly symmetric, these effects average out, but any asymmetry in the beam-target overlap (beam not perfectly centered, etc.) can lead to a net modification of the measured target polarization.

Averaging the azimuthal magnetic field across the beam radius out to $\sigma_r^{95\%}$ in the midplane ($y = 0$) yields a net offset of approximately 2.09 mT. This breaks the left-right symmetry, since the effective average field becomes $B_L = 122.09$ mT in the left hemisphere and $B_R = 117.91$ mT on the right. This spatial variation leads to an imbalance in the nuclear polarization of atoms through which the stored beam passes. To quantify the effect for two injected states like $|1\rangle + |4\rangle$, we calculate the resulting difference in target polarization between the hemispheres through

$$\delta Q = \frac{Q_{|1\rangle+|4\rangle}(B_L) - Q_{|1\rangle+|4\rangle}(B_R)}{Q_{|1\rangle+|4\rangle}(B_y^{\text{nom}})} \approx 0.25\%, \quad (56)$$

where we have used the expressions from Eq. (12). The result is the same for states $|2\rangle + |3\rangle$, and the effect appears to be small for HJET operation at RHIC and does not contribute significant systematic uncertainty to the measured jet polarization.

The analysis shows that under RHIC conditions, beam-induced depolarization is unlikely to play a significant role. The time-averaged photon emission rate $\dot{N}_{\gamma, \text{total}}^{\text{avg}}(f)$ falls below the critical threshold of 2.1×10^{10} photons/s above the cutoff frequency $f_{\text{cut}} \approx 551.4$ MHz, corresponding to harmonic number $n_{\text{cut}} \approx 59$. To ensure robustness against local perturbations—such as those from the beam's own transient magnetic fields—it is prudent to treat n_{cut} as a lower bound and avoid operation below a factor of ≈ 3 of this limit. For comparison, Fig. 9 shows that RHIC flattop provides a safety factor of approximately 5 ($\approx 375/75$) for HJET operation. Furthermore, field-induced modifications to the effective holding field lead to a small target polarization imbalance across the atomic beam, with $\delta Q/Q \lesssim 0.2\%$ for the typical $|1\rangle + |4\rangle$ and $|2\rangle + |3\rangle$ injected state combinations. Overall, these results establish RHIC as a well-characterized reference point, providing the baseline for the EIC-specific evaluation in the next section.

VI. BEAM-INDUCED DEPOLARIZATION OF HYDROGEN AT THE EIC

Having established the computational framework using the RHIC conditions in Sec. V, we now apply this methodology to evaluate beam-induced depolarization risks at the future EIC. The EIC presents new challenges due to higher bunch repetition frequencies, smaller beam sizes, and elliptical beam profiles. We assess depolarization risks for the operation of the polarized hydrogen target at EIC injection and flattop energies (23.5 and 275 GeV).

Unlike at RHIC, at injection, the hadron beams at EIC will undergo electron cooling for approximately 30 min to reduce the vertical emittance, thereby providing an extended window for beam polarization calibration using the HJET. Measurements at both injection and flattop energies are essential to establish absolute polarization calibration points throughout the accelerator chain. With present-day polarized target technology and the anticipated hundreds to over a thousand bunches circulating in the EIC, these measurements will surpass both the systematic and statistical precision achievable in the Booster or AGS, where only single bunches or a few bunches can be stored. Furthermore, absolute polarization calibration is essential to understand polarization transmission through the accelerator chain, where for protons such calibration is currently only available at the 200 MeV polarimeter behind the Linac [51].

A. EIC beam parameters, spectral characteristics, and depolarization thresholds for $B_0 = 120$ mT

In this section, we examine how the situation would appear if the polarized target were operated at the same $B_0 = 120$ mT holding field as at RHIC.

The beam and optics parameters at the future HJET location in IP 4 for both EIC energies are summarized in Table II. Compared to RHIC conditions, the EIC presents several key differences: significantly higher bunch repetition frequencies, smaller normalized emittances leading to reduced transverse beam sizes, and elliptical beam profiles due to unequal beta functions at the interaction point. These parameters alter the rf field strength, harmonic density, and spatial field distributions experienced by the hydrogen atoms, as it brings many more atomic transitions within the range of potentially depolarizing harmonics.

Importantly, the elliptical transverse beam profile at the EIC does not influence the frequency-domain spectrum, which depends solely on the longitudinal current distribution $I_b(t)$ and bunch spacing f_b . The beam-induced magnetic field spectrum $B(f)$ inherits this harmonic structure directly through Eq. (27), enabling direct application of the resonance analysis framework established in Sec. V.

The frequency-domain spectra of the EIC bunch trains at injection (23.5 GeV) and flattop (275 GeV) energies were

numerically obtained alongside the analytical envelopes, in the same fashion as shown in Fig. 8, making use of Eq. (18) with the EIC-specific parameters from Table II, yielding a familiar series of discrete harmonic peaks modulated by a Gaussian envelope. Compared to the RHIC spectrum (Fig. 8), both EIC spectra shown in Fig. 13 indicate a considerably higher frequency content due to their shorter bunch durations and higher bunch frequencies.

The photon emission rates $N_{\gamma, \text{total}}^{\text{avg}}(f)$ from Eq. (39) for the three cases were analyzed to determine where the photon rate drops below the depolarization threshold in the same way as previously applied for RHIC in Fig. 11. The cutoff frequency f_{cut} and corresponding harmonic cutoff n_{cut} were obtained to depolarize about 1% of the atoms in the beam. The results are summarized in Table III.

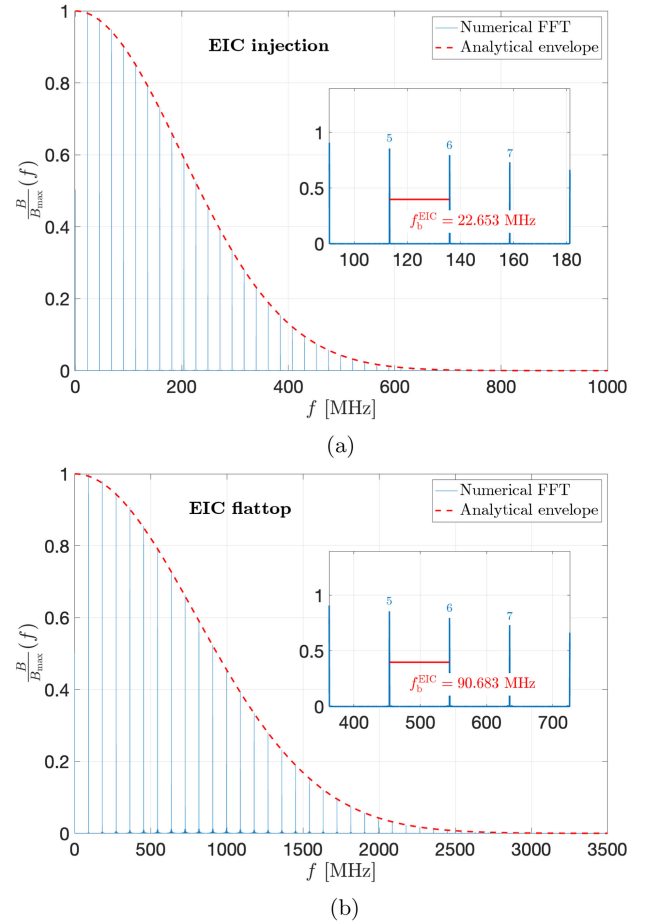


FIG. 13. Frequency-domain spectra for EIC bunch trains at (a) injection (23.5 GeV) and (b) flattop (275 GeV) energies. The plots show the numerically obtained one-sided normalized FFT amplitude spectrum (blue) overlaid with the analytical Gaussian envelope (dashed red) from Eq. (18), following the same methodology as Fig. 8. The higher bunch repetition frequencies at EIC result in wider harmonic spacing compared to RHIC. Harmonic numbers $n = f/f_b$ are labeled for selected peaks.

B. Hyperfine transition resonances in hydrogen for $B_0 = 120$ mT

We now examine how the EIC's higher bunch repetition frequencies affect hyperfine transition resonances based on the results from the spectral analysis summarized in Table III.

The resonance condition for transitions between hydrogen hyperfine states given in Eq. (25) applies at the EIC as well. However, the higher bunch repetition frequencies at the EIC compared to RHIC cause all resonances to shift toward lower harmonic numbers $n = f_{ij}(B)/f_b$. At RHIC, several transitions—such as the $|2\rangle \rightarrow |4\rangle$ and $|1\rangle \rightarrow |3\rangle$ transitions—appeared only at harmonic numbers above $n \approx 375$ and could therefore be safely ignored in the depolarization analysis. At the EIC, these same transitions are mapped to significantly lower harmonic numbers where the spectral power is still high. As shown in Fig. 14, this effect will be most pronounced for EIC flattop energy where all hyperfine transitions fall within the spectral range of potentially depolarizing harmonics, increasing the number of transitions that must be taken into account.

A second implication is the significantly reduced magnetic field spacing between adjacent resonances. At RHIC, the separation between relevant depolarizing resonance points near the holding field $B_0 = 120$ mT was about 4 mT (see Fig. 9). At the EIC, this spacing compresses to approximately 1.5 mT in the same field region [Fig. 14(b)]. This narrow spacing increases the sensitivity of the atomic beam to even modest perturbations of the magnetic field in the vicinity of the interaction region. In particular, beam-induced time-dependent magnetic fields $B_{\text{beam}}(x, y, t)$ may drive atoms locally and transiently into resonance—an effect that was negligible at RHIC but must be assessed explicitly for the EIC. The following section addresses this by quantifying the magnitude and spatial variation of beam-induced magnetic fields at the EIC target.

C. Beam-induced magnetic fields at the EIC target location in IP 4

In order to relate the magnetic field distribution of an elliptic beam to that of an equivalent round beam, we define first a circular beam profile with the same rms transverse

TABLE III. Result of the frequency-domain spectral analysis of the bunch trains listing the obtained parameters f_{cut} and harmonic cutoff n_{cut} required to depolarize about 1% of the atoms in the atomic beam for RHIC and the two EIC cases (injection and flattop).

Quantity	RHIC		EIC
	Flattop	Injection	Flattop
Bunch frequency f_b (MHz)	9.381	22.653	90.683
Cutoff frequency f_{cut} (MHz)	551.4	1285.4	5061.1
Harmonic cutoff $n_{\text{cut}}(f_{\text{cut}})$	58.5	56.7	55.8

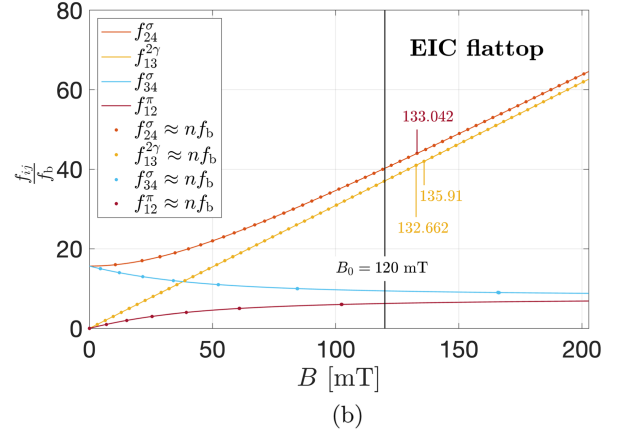
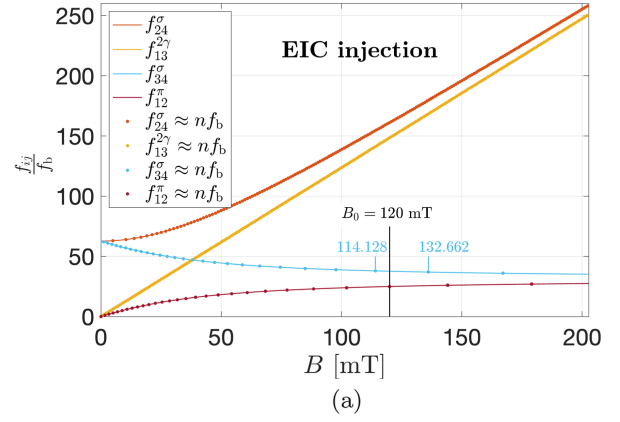


FIG. 14. Resonant overlap between hydrogen hyperfine transition frequencies $f_{ij}(B)$ and the harmonic spectrum of the EIC bunch structure for injection (a) and flattop (b) energies. The plots show the harmonic number $f_{ij}(B)/f_b$ as a function of magnetic field B , with markers indicating points where a near-resonant condition $f_{ij}(B) \approx n f_b$ is satisfied within a tolerance of 0.002. On flattop, in the region near the static holding field $B_0 = 120$ mT used at RHIC, the spacing between adjacent resonances would be ≈ 1.5 mT.

area. This is achieved by equating the area $\pi\sigma_x\sigma_y$ of the original Gaussian beam with the area of a symmetric beam $\pi\sigma_r^2$, yielding

$$\sigma_r = \sqrt{\sigma_x\sigma_y}. \quad (57)$$

This effective round-beam size corresponds to using geometric means of the normalized emittances and beta functions,

$$\sigma_r = \sqrt{\frac{\epsilon_{\text{avg}}^n \cdot \beta_{\text{avg}}}{\beta\gamma}}, \quad (58)$$

with

$$\epsilon_{\text{avg}}^n = \sqrt{\epsilon_x^n \epsilon_y^n}, \quad \text{and} \quad \beta_{\text{avg}} = \sqrt{\beta_x \beta_y}, \quad (59)$$

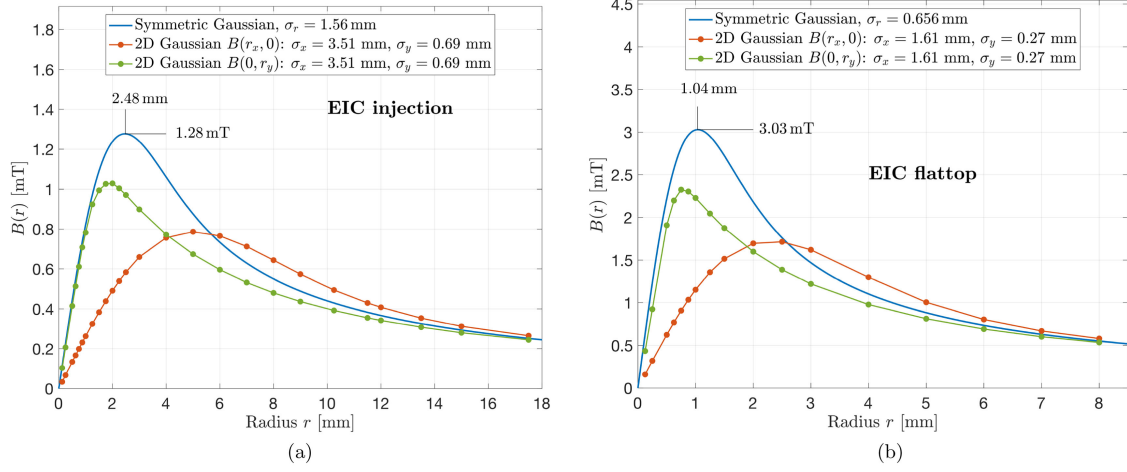


FIG. 15. Magnetic field distribution for the EIC at injection (23.5 GeV) (a) and flattop (275 GeV) (b). The blue curves show the analytical radial field profile $B(r)$ for a symmetric Gaussian beam with rms width σ_r , reaching the peak fields indicated. Red and green markers show numerical calculations using the Green's function method for an asymmetric Gaussian beam with σ_x and σ_y , plotted along the horizontal and vertical axes as $B(r_x, 0)$ and $B(0, r_y)$, respectively.

ensuring that the round-beam approximation preserves both the total charge density and transverse extent relevant for calculating average magnetic fields.

The peak instantaneous magnetic flux densities are calculated using the same methodology as in Sec. VC. For a round Gaussian beam with $\sigma_x = \sigma_y = \sigma_r$, the magnetic field follows the analytical form previously described in Eq. (44). For the asymmetric Gaussian beam parameters of the EIC at IP 4, listed in Table II, we employ the vector potential approach described in Sec. VC to numerically calculate the magnetic field.

Figure 15 compares the magnitude of the magnetic field as a function of distance r from the center of the current distribution for both the symmetric approximation and the full asymmetric calculation. The magnetic field is plotted along the x and y axes, parallel to the long and short axes of the elliptical beam current distribution, respectively. Unlike the round-beam case where the field is purely azimuthal with equal magnitude at fixed radius, the asymmetric beam produces different field distributions when measured along these principal axes. Notably, the magnetic field magnitude of the asymmetric current distribution does not exceed that of the equivalent round beam at any radius. This indicates that the round-beam approximation provides a safe conservative upper limit for the expected magnetic flux density in the vicinity of the beam.

D. Quantum mechanical depolarization analysis

The preceding analysis has shown that EIC operation at $B_0 = 120$ mT brings hyperfine transitions into the range of populated beam harmonics, creating potential depolarization risks. As illustrated in Fig. 14, the EIC's higher bunch frequency maps hyperfine transitions to much lower harmonic numbers compared to RHIC. For flattop operation, this creates problematic resonance scenarios: the σ_{24}

and two-photon $f_{13}^{2\gamma}$ transitions exhibit extremely dense spacing of approximately 1.5 mT, while power broadening effects can significantly widen effective resonance regions.

To quantify these effects, we use the quantum mechanical framework from Appendix C. The stimulated transition rate for a specific hyperfine transition is

$$\Gamma_{ij}(f) = \frac{2\pi}{\hbar} |\langle j|H_1|i\rangle|^2 S(f) V_{\text{int}}, \quad (60)$$

where $S(f) = B_1(f)^2 / (2\mu_0)$ is the spectral power density and the matrix elements depend on the transition type through the Breit-Rabi mixing coefficients.

We note that in the RHIC setup the holding field \vec{B}_0 has been oriented vertically (y axis). For future EIC operation, however, one can envision configurations with \vec{B}_0 along x , y , or z . Since the classification into π - and σ -transitions is always relative to the orientation of \vec{B}_0 , different entries of the transition matrix become active depending on that choice. In practice, all nonzero couplings in the transition matrix of Eq. (C4) must therefore be considered.

Consider first the π_{12} transition resonance at $B_0 = 102$ mT. From Fig. 14(b), this occurs at harmonic number $n = 6$ (frequency $f = 544$ MHz). The EIC beam spectral envelope (Fig. 16) provides $B_1 = 1174$ μT at this frequency. At $B_0 = 102$ mT, the dimensionless field parameter $x = 2.01$ gives $\sin^2 \theta = 0.052$ for this π -transition. The corresponding Rabi frequency is $\Omega = 2.36 \times 10^7$ rad s^{-1} , yielding a transition probability

$$\Pi = \sin^2\left(\frac{\Omega\tau_{\text{int}}}{2}\right) \approx 0.045. \quad (61)$$

This demonstrates that about 4.5% of hydrogen atoms undergo hyperfine transitions when encountering this

resonance. Such a depolarization is unacceptable for the EIC. In contrast, at RHIC the same transition corresponds to $n \approx 58$, near the spectral cutoff $n_{\text{cut}} \approx 59$, where despite being close to the photon emission threshold the actual depolarization remains far below detectable levels. Using the full 4×4 quantum-mechanical model (Appendix C) with RHIC bunch parameters, the driving field amplitude at this harmonic is more than 9 orders of magnitude smaller than in the EIC case, leading to a Rabi frequency so low that the ensemble-averaged depolarization probability is at the 10^{-11} level. Both the spectral-power limit and the QM analysis therefore show that the effect should not have been observable at RHIC.

As a second example, consider the σ_{24} transition at $B_0 = 119.1$ mT and harmonic number $n = 40$ from Fig. 14(b) (frequency $f = 3627$ MHz). For this case, we use the spatial field distribution approach with an effective rf field amplitude of about $B_1 = 2.0$ mT, corresponding to the region where the field exceeds 2 mT between $r = +0.5$ mm and $r = +2.2$ mm in Fig. 15(b). The interaction time is then set by the traversal of this region, $\tau_{\text{int}} = 1.7 \text{ mm}/1807 \text{ ms}^{-1} \approx 0.94 \text{ us}$. The mixed σ -transition has a dimensionless transition strength of $\sin^2(2\theta) = 1/(1+x^2) \approx 0.154$ at this field strength, yielding a Rabi frequency $\Omega \approx 6.9 \times 10^7 \text{ rad s}^{-1}$ and a transition probability of about 46%.

These calculations demonstrate that EIC operation in the 120 mT region leads to unavoidable depolarization effects. While the extreme case of operating directly on resonance (about 4.5% depolarization for the π_{12} transition and about 46% for the σ_{24} transition) can, in principle, be avoided through proper B_0 field selection, the dense resonance spacing of approximately 1.5 mT means that beam-induced field variations will sweep atoms across multiple resonance conditions. Power broadening effects (Sec. V B 1) further widen each resonance by approximately ± 0.3 mT, increasing the probability of resonant encounters and causing significant polarization loss. The quantum mechanical analysis therefore validates the need for operating conditions that shift all hyperfine transitions away from populated beam harmonics where such encounters become unavoidable.

These quantum mechanical calculations provide valuable physical insight but represent order-of-magnitude estimates rather than precise predictions. The analysis assumes uniform conditions, whereas the actual beam-induced fields exhibit complex temporal structure and strong spatial variation across the atomic beam volume. The calculated probabilities demonstrate physical capability for significant depolarization rather than quantitative forecasts.

E. From RHIC to EIC: Increasing HJET holding field to suppress depolarizing resonances

As discussed in Sec. VI B, the use of a static holding field of $B_0 = 120$ mT, as employed at RHIC, would be incompatible with reliable operation at the EIC. At this field

strength, essentially all hyperfine transitions in hydrogen would lie within the dense spectrum of beam-induced harmonics, leading to significant depolarization.

The critical harmonic cutoff for depolarizing photon emission at EIC flattop lies around $f_{\text{cut}} = 5061.1$ MHz (harmonic number $n_{\text{cut}} \approx 55.8$), as shown in Fig. 16. While this cutoff is comparable to RHIC in terms of harmonic number, the EIC's higher bunch frequency ($f_b = 90.683$ MHz) maps hyperfine transitions to much lower harmonic numbers than at RHIC. At $B_0 = 120$ mT, virtually all transitions become vulnerable to resonant depolarization, as indicated in Fig. 14(b).

Exacerbating this issue, the magnetic field generated by the beam itself, on the order of 3 mT, as shown in Fig. 15(b), further compromises target operation. Given the narrow resonance spacing of approximately 1.5 mT under these conditions, such beam-induced field variations can sweep atoms across multiple hyperfine resonances, making target operation at 120 mT untenable.

The solution suggested here is to increase the holding field to eliminate resonance overlap. Figure 17 illustrates that above $B_0 \approx 236.06$ mT, the highest transition frequencies f_{12}^π and f_{34}^σ no longer coincide with any harmonic that could induce depolarization, as harmonic number 8 is never reached by either f_{12}^π or f_{34}^σ beyond this field. Operating the HJET in the vicinity of $B_0 \approx 400$ mT, e.g., in the blue shaded region shown in Fig. 17, ensures a region free from depolarizing conditions, and will keep all hyperfine transition frequencies at least a factor of

$$\frac{f_{13}}{f_b} \approx \frac{125}{n_{\text{cut}}} \approx 2.2 \quad (62)$$

away from populated beam harmonics. This configuration appears feasible for both EIC injection and flattop energies

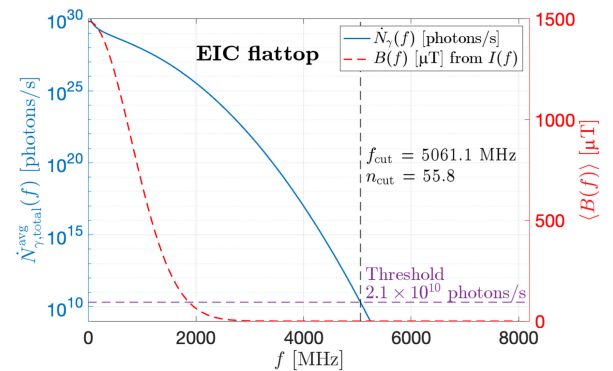


FIG. 16. Photon emission rate $\dot{N}_{\gamma, \text{total}}^{\text{avg}}(f)$ from Eq. (39) (left axis, blue line) and corresponding rf magnetic field amplitude $\langle B(f) \rangle$ from Eq. (37) (right axis, dashed line) for EIC flattop operation (275 GeV). The dashed horizontal line marks the threshold of $2.1 \times 10^{10} \text{ s}^{-1}$ required to depolarize about 1% of the atoms in the beam. The vertical line marks the cutoff frequency $f_{\text{cut}} = 5061.1$ MHz and harmonic number $n_{\text{cut}} = 55.8$ where the photon rate drops below the depolarization threshold.

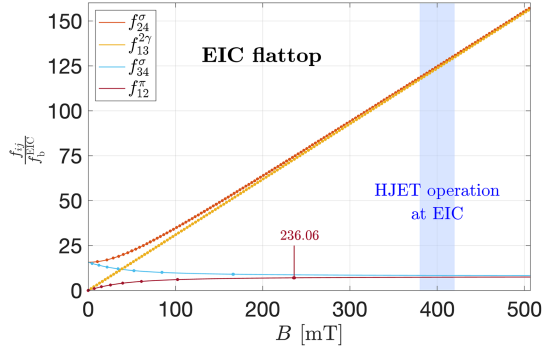


FIG. 17. Solution for EIC is to operate HJET in the vicinity of the blue shaded region at a magnetic guide field of $B_0 \approx 400$ mT. The highest magnetic field where the rightmost resonance for f_{14}^{π} occurs is indicated.

and provides a reliable solution for suppressing beam-induced depolarization. To match RHIC's safety factor of 6.5 (375/58, comparing dangerous transitions to the spectral cutoff), EIC would require operation at ≈ 1200 mT where transitions occur at harmonic 364. The 400 mT solution represents a practical compromise, providing a safety factor of 2.2.

The quantum mechanical analysis presented in Sec. VID provides additional validation of these concerns, demonstrating that when resonance conditions are encountered at a magnetic guide field of 120 mT in the EIC, significant target depolarization occurs (up to $\approx 5\%$ for direct resonance hits, $\approx 45\%$ for spatial field effects). However, while the quantum mechanical analysis demonstrates the physics underlying these depolarization risks, the primary justification for the 400 mT recommendation remains the photon emission threshold analysis, which provides a more robust framework for handling the broadband, spatially varying rf fields characteristic of bunched beam environments.

Beyond eliminating depolarizing resonances, operating at 400 mT provides substantial improvements in systematic uncertainties from beam-induced field asymmetries. To quantify this additional benefit, we analyze the polarization asymmetries using the methodology established for RHIC in Eq. (56) and compare the three operational scenarios.

The beam-induced magnetic field characteristics for the three operational scenarios are summarized in Table IV, with peak field values extracted from Figs. 12 (RHIC) and 15 (EIC). The field offset values, representing the average magnetic field asymmetry across the atomic beam radius in horizontal direction, are calculated by integrating the azimuthal magnetic field over the respective beam cross sections using the transverse beam sizes (σ_r) listed in the table.

The analysis demonstrates that the 400 mT holding field provides a dual benefit: complete elimination of depolarizing resonances while reducing the systematic uncertainties from beam-induced magnetic field by more than an order-of-magnitude compared to RHIC operation. Both EIC

TABLE IV. Beam-induced magnetic field parameters and resulting polarization asymmetries for RHIC and EIC operational scenarios. The table shows the static holding field B_0 , the dimensionless field parameter $x = B_0/B_c$, the corresponding mixing angle θ defined by $\tan(2\theta) = 1/x$, the nuclear polarization for combined injection of states $|1\rangle + |4\rangle$ or $|2\rangle + |3\rangle$, the transverse beam size σ_r , and the peak beam-induced field B_{\max} . The offset represents the average field asymmetry calculated by integrating over the left and right halves of the beam cross section. The effective magnetic fields in the left and right hemispheres are given by B_L and B_R , respectively, with ΔB being the total field difference. The target polarization asymmetry $\delta Q/Q$ is calculated using Eq. (56).

Parameter	Unit	RHIC at IP 12		EIC at IP 4	
		Flattop	Injection	Flattop	Injection
Energy	GeV	255	23.5	275	275
B_0	mT	120	400	400	400
x	...	2.367	7.889	7.889	7.889
θ	rad	0.1999	0.0630	0.0630	0.0630
$ Q_{ 1\rangle+ 4\rangle} $...	0.962	0.996	0.996	0.996
$ Q_{ 2\rangle+ 3\rangle} $...	0.962	0.996	0.996	0.996
σ_r	mm	0.23	1.57	0.66	0.66
B_{\max}	mT	2.73	1.28	3.03	3.03
Offset	mT	2.09	0.98	2.32	2.32
B_L	mT	122.1	401.0	402.3	402.3
B_R	mT	117.9	399.0	397.7	397.7
ΔB	mT	4.2	2.0	4.6	4.6
$(\delta Q/Q)$	%	0.253	0.012	0.027	0.027

scenarios exhibit polarization asymmetries well below 0.1%, representing improvements of $18 \times$ (injection) and $8 \times$ (flattop) relative to RHIC for this effect, confirming that the higher field strength addresses both operational reliability and precision requirements for EIC polarimetry.

VII. CONCLUSION AND OUTLOOK

This work has systematically investigated the risk of beam-induced depolarization in the hydrogen jet polarimeter system, with a focus on identifying conditions under which the system can function reliably at the electron-ion collider (EIC). Polarization measurements are essential at both injection and flattop energies, and the goal has been to define operational settings for the magnetic holding field B_0 that ensure immunity from depolarizing resonances.

A realistic model of the atomic hyperfine level structure under magnetic fields was combined with a detailed description of the beam's temporal structure to assess potential depolarization mechanisms. In particular, the beam's bunch structure was treated as a periodic train, allowing for harmonic decomposition and frequency-domain analysis via discrete Fourier transform. This approach provides a rigorous and transparent framework for identifying resonance conditions between beam harmonics and hyperfine transitions, offering a systematic

basis for evaluating depolarization risks in beam-target interactions for the EIC. The approach described here can be readily applied to evaluate the situation of the planned polarized jet target at the LHC [52].

A key innovation introduced in this study is the formulation of beam-induced depolarization in terms of a photon emission threshold: a cutoff frequency f_{cut} , above which the likelihood of resonant transitions is significantly reduced due to the steep falloff in spectral power. This provides a robust basis for comparing different accelerator configurations on the same quantitative footing. For RHIC, this cutoff lies near 551.4 MHz, corresponding to a harmonic number $n_{\text{cut}} \approx 59$. At the EIC flattop, due to its approximately $10 \times$ higher bunch frequency, the same n_{cut} corresponds to an absolute cutoff frequency of 5.061 GHz. As a result, the same set of hyperfine transitions is exposed to lower harmonic numbers at the EIC, increasing the likelihood of resonant overlap with populated beam harmonics at a given holding field.

To validate this photon emission framework, a rigorous quantum mechanical analysis using proper Breit-Rabi matrix elements and stimulated transition rates was performed. The quantum mechanical calculations demonstrate that when resonance conditions are encountered at the EIC, significant depolarization occurs ($>70\%$ for direct resonance encounters), while the same transitions at RHIC fall in spectral regions with negligible field amplitudes. This quantum mechanical validation confirms that the photon emission approach correctly identifies problematic frequency ranges, though the simplified treatment of field coherence and spatial uniformity in this approach means these calculations should be viewed as physics demonstrations rather than precise quantitative predictions.

Furthermore, the spatial variation of the magnetic field near the beam but within the target volume was calculated using the Biot-Savart law applied to a two-dimensional Gaussian beam profile. The derivation employed the magnetic vector potential to accurately capture the azimuthal field generated by elliptic beam distributions. This beam-induced field adds asymmetrically to the static holding field, leading to spatial variations in the net magnetic field direction, which can symmetrically alter the local spin orientation and thus the actual nuclear polarization of atoms across the target volume.

All modeling and analysis techniques were benchmarked using parameters from RHIC at flattop, where successful beam polarimetry using the HJET has been demonstrated. The same methods were then applied to EIC conditions, both at injection and flattop energies. It was shown that the current RHIC operating point at $B_0 = 120$ mT is no longer viable at the EIC, as nearly all hyperfine transitions would be exposed to populated harmonics in the beam spectrum. We emphasize that this conclusion does not depend on the specific orientation of the holding field: while at RHIC \vec{B}_0

has been oriented vertically, future EIC operation may employ \vec{B}_0 along x , y , or z . Since the π/σ classification is always relative to \vec{B}_0 , all nonzero couplings in the transition matrix of Eq. (C4) must be regarded as active when assessing depolarization risk. A viable solution is to operate the HJET at the EIC at IP 4 at a significantly higher magnetic field of $B_0 = 400$ mT. This field setting ensures a clean separation between transition frequencies and harmonic content, providing a buffer of about a factor of three above the depolarization threshold, and is compatible with EIC operation at both injection and flattop energies, ensuring safe, depolarization-free operation of the HJET.

Precise knowledge of the molecular hydrogen fraction is essential for determining the effective target polarization, since H_2 molecules contain unpolarized protons and therefore dilute the nuclear polarization of the atomic beam (see Appendix A). Existing measurements of the degree of dissociation are performed only intermittently and cannot track slow drifts during long data-taking periods. For EIC operation, the upgraded HJET will therefore incorporate a quadrupole mass spectrometer positioned below the interaction region to determine and monitor the molecular fraction of the atomic beam *in situ*. This diagnostic will enable continuous corrections of the effective target polarization and thereby eliminate a significant systematic uncertainty.

The developed tools enable predictive estimates of depolarizing conditions and support the selection of holding fields and operating modes for the polarized hydrogen target as an absolute beam polarimeter at the EIC and elsewhere. While the analysis centers on hydrogen, the methodology is directly applicable to deuterium, whose more complex hyperfine structure may lead to different resonance conditions and warrants future investigation. To achieve the stringent 1% relative polarization uncertainty required by the EIC physics program, several additional developments should be pursued: implementation of continuous *in-situ* monitoring of the molecular content in the hydrogen jet, and a magnetic guide field system that enables direct measurement of all polarization components of the beam polarization vector \vec{P} . These enhancements, combined with the optimized magnetic holding field identified in this work, will establish a robust foundation for high-precision absolute beam polarimetry at the EIC.

ACKNOWLEDGMENTS

The authors acknowledge useful discussions with Christoph Montag and Anatoli Zelensky, and thank Andrei Poblaguev for his helpful comments. The work of N. N. N. was supported by the Russian Science Foundation under Grant No. 25-72-30005. V. S. acknowledges support from BNL through the Laboratory Directed Research and Development (LDRD) program under Project No. 27578.

DATA AVAILABILITY

The RHIC and EIC input parameters used in this work are publicly available; the specific values employed are listed in Table II. All results shown in the tables and figures are generated from analytic expressions evaluated with these inputs. The Appendix A on *Molecular contamination in atomic beams* presents a reanalysis of data published previously (see Ref. [32]).

APPENDIX A: MOLECULAR CONTAMINATION IN ATOMIC BEAMS

Atomic beam sources using sextupole magnets inevitably produce a fraction of molecules that do not originate from the nozzle, but rather from defocused atoms that recombine on the inner surfaces of the sextupole magnets. These recombined molecules form an effusive molecular beam that accompanies the focused atomic beam on its way to the target region [33,34]. In order to quantify this effect, we analyze in the following data from the ANKE experiment at COSY [32] where we explicitly wanted to determine the molecular content in the interaction region and its spatial behavior. The approach used in Ref. [31] to determine the molecular fraction by simply turning off the dissociator is ill-fated, as it does not produce defocused atoms and as such does not lend itself as a method to realistically estimate the molecular content in the target.

The dissociator design developed for the atomic beam source of the ANKE experiment at COSY [32] was directly adopted for the polarized atomic beam source used in the RHIC HJET [29]. The construction drawings were provided by the Jülich group and the dissociator design is identical in both systems. As reported in [32], degree of dissociation measurements were carried out with a quadrupole mass spectrometer movable on an xy table that allowed determination of the spatial dependence of the molecular-to-atomic content in the beam some distance (567 and 697 mm) behind the exit of the last sextupole magnet. The analysis presented here examines the degree of dissociation data obtained, shown in panels (c) and (d) of Fig. 24 of Ref. [32].

The degree of dissociation α was measured at multiple positions along the transverse x and y directions perpendicular to the atomic beam 697 mm behind the exit of the last sextupole magnet. Figure 18 shows the results of these measurements along with constant fits to the data. The results demonstrate a flat dependence of α near the beam center, and we confine our analysis to data within ± 5 mm around the beam center since the atomic beam of the HJET at RHIC has a diameter of approximately 10 mm [29]. For the x profile, centered around $x = 11.4$ mm, a fitted constant value of $\alpha_x = 0.932 \pm 0.007$ is obtained, and for the y profile, centered at $y = 14.8$ mm, $\alpha_y = 0.937 \pm 0.010$. The combined result, calculated as an inverse-variance weighted average of both spatial

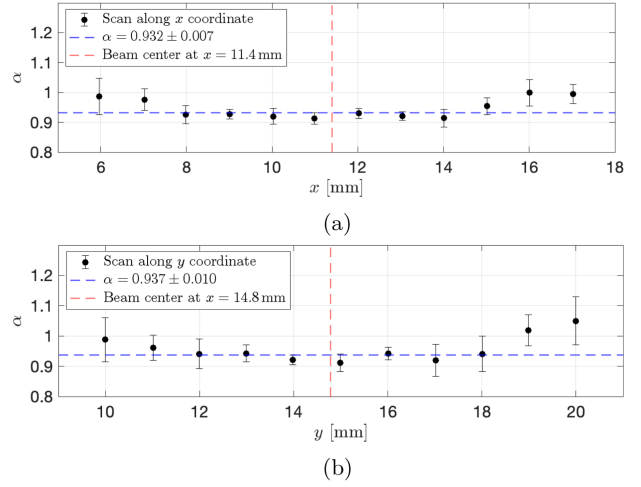


FIG. 18. Degree of dissociation α measured across orthogonal spatial profiles of the atomic beam. The red dashed lines indicate the beam centers, while the blue dashed lines show constant fits to the data. (a) shows the x profile with beam center at $x = 11.4$ mm and fitted constant $\alpha_x = 0.932 \pm 0.007$. (b) shows the y profile with beam center at $y = 14.8$ mm and fitted constant $\alpha_y = 0.937 \pm 0.010$.

profiles, gives

$$\alpha = 0.934 \pm 0.006. \quad (\text{A1})$$

The degree of dissociation of the atomic beam is defined in terms of the atomic density ρ_{atom} and molecular density ρ_{mol} as

$$\alpha = \frac{\rho_{\text{atom}}}{\rho_{\text{atom}} + 2\rho_{\text{mol}}}, \quad (\text{A2})$$

and this can be rearranged to obtain the molecular-to-atomic density ratio

$$\frac{\rho_{\text{mol}}}{\rho_{\text{atom}}} = \frac{1 - \alpha}{2\alpha}. \quad (\text{A3})$$

Using the measured value of α from Eq. (A1), we obtain

$$\frac{\rho_{\text{mol}}}{\rho_{\text{atom}}} = 0.035 \pm 0.003. \quad (\text{A4})$$

This result indicates that approximately 3% to 4% of the target density consists of hydrogen molecules, consistent with findings from studies on similar atomic beam sources [33,34]. These unpolarized molecules systematically reduce the target polarization of the HJET.

APPENDIX B: HYPERFINE INTERACTION HAMILTONIAN AND NUCLEAR POLARIZATIONS FOR GROUND STATE HYDROGEN

The complete Hamiltonian for the ground state hydrogen atom in an external magnetic field $\vec{B} = B\vec{e}_z$, where \vec{e}_z

defines the quantization axis, consists of three terms

$$H = A_{\text{hfs}} \mathbf{I} \cdot \mathbf{J} - \boldsymbol{\mu}_J \cdot \vec{B} - \boldsymbol{\mu}_I \cdot \vec{B}. \quad (\text{B1})$$

Here \mathbf{I} is the nuclear spin operator ($I = \frac{1}{2}$ for hydrogen), \mathbf{J} is the total electron angular momentum operator ($J = \frac{1}{2}$ for the ground state), and A_{hfs} is the hyperfine coupling constant. For the hydrogen ground state (1s), the orbital angular momentum is 0 ($l = 0$), so the total electron angular momentum equals the electron spin: $\mathbf{J} = \mathbf{S}$. The magnetic moment operators are

$$\boldsymbol{\mu}_J = -g_J \mu_B \mathbf{J} \quad \text{and} \quad \boldsymbol{\mu}_I = g_I \mu_N \mathbf{I}, \quad (\text{B2})$$

so that when we choose the quantization axis along \vec{B} , the complete Hamiltonian becomes

$$H = A_{\text{hfs}} \mathbf{I} \cdot \mathbf{J} + g_J \mu_B J_z B + g_I \mu_N I_z B. \quad (\text{B3})$$

The hyperfine coupling constant is related to the zero-field hyperfine splitting by $A_{\text{hfs}} = 4E_{\text{hfs}}/\hbar^2$, where E_{hfs} is given in Eq. (8).

We work in the uncoupled basis $\{|m_J, m_I\rangle\}$ where $m_I, m_J = \pm \frac{1}{2}$. The four basis states are labeled in decreasing order of hyperfine energies, as given in Eqs. (5). Since the total angular momentum projection $m_F = m_J + m_I$ is conserved by the hyperfine interaction, states with the same m_F can couple while states with different m_F cannot. Therefore, $|1\rangle$ and $|3\rangle$ remain uncoupled, while $|2\rangle$ and $|4\rangle$ (both with $m_F = 0$) form a coupled 2×2 system.

The dot product $\mathbf{I} \cdot \mathbf{J} = I_z J_z + \frac{1}{2}(I_+ J_- + I_- J_+)$ has diagonal matrix elements $\langle m_J, m_I | I_z J_z | m_J, m_I \rangle = \hbar^2 m_I m_J$ and off-diagonal elements $\langle 2 | I_- J_+ + I_+ J_- | 4 \rangle = \langle 4 | I_- J_+ + I_+ J_- | 2 \rangle = \hbar^2$. The hyperfine matrix is

$$\frac{\mathbf{I} \cdot \mathbf{J}}{\hbar^2/4} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & -1 & 0 & 2 \\ 0 & 0 & 1 & 0 \\ 0 & 2 & 0 & -1 \end{pmatrix} \quad (\text{B4})$$

Using the dimensionless field strength parameter x defined in Eq. (6) and defining $y = \frac{2g_I \mu_N B}{E_{\text{hfs}}}$, we note that $y \ll x$ since $\mu_N/\mu_B = 1/1836.15$ and $g_I/g_J \approx 2.8$. The complete dimensionless Hamiltonian becomes

$$\frac{H}{E_{\text{hfs}}/4} = \begin{pmatrix} 1+2x+y & 0 & 0 & 0 \\ 0 & -1+2x-y & 0 & 2 \\ 0 & 0 & 1-2x-y & 0 \\ 0 & 2 & 0 & -1-2x+y \end{pmatrix} \quad (\text{B5})$$

The eigenvalues can be found by diagonalizing this matrix. States $|1\rangle$ and $|3\rangle$ remain uncoupled with eigenvalues $E_{|1\rangle} = \frac{E_{\text{hfs}}}{4}(1+2x+y)$ and $E_{|3\rangle} = \frac{E_{\text{hfs}}}{4}(1-2x-y)$.

States $|2\rangle$ and $|4\rangle$ couple through the hyperfine interaction with eigenvalues $E_{|2\rangle,|4\rangle} = \frac{E_{\text{hfs}}}{4}[y - 1 \pm 2\sqrt{1+2xy+x^2}]$. For typical magnetic fields where $x \gg y$, this reduces to the familiar Breit-Rabi formula $E_{|2\rangle,|4\rangle} \approx \frac{E_{\text{hfs}}}{4}[-1 \pm 2\sqrt{1+x^2}] + \frac{E_{\text{hfs}}}{4}y$. Combining all four eigenvalues and including the nuclear Zeeman correction, we obtain the complete Breit-Rabi energy formula given in Eq. (11) in the main text.

The nuclear target polarization of each hyperfine state is determined by the quantum mechanical expectation value of the nuclear spin component along the quantization axis, expressed via

$$Q_{|i\rangle} = \frac{2}{\hbar} \langle \psi_i | I_z | \psi_i \rangle. \quad (\text{B6})$$

To calculate this, we need the explicit eigenvectors. States $|1\rangle$ and $|3\rangle$ remain pure uncoupled states at all field strengths, while states $|2\rangle$ and $|4\rangle$ become mixed states. The corresponding wave functions are

$$\begin{aligned} |\psi_1\rangle &= |e^\uparrow p^\uparrow\rangle, \\ |\psi_2\rangle &= \cos\theta |e^\uparrow p^\downarrow\rangle + \sin\theta |e^\downarrow p^\uparrow\rangle, \\ |\psi_3\rangle &= |e^\downarrow p^\downarrow\rangle, \\ |\psi_4\rangle &= \cos\theta |e^\downarrow p^\uparrow\rangle - \sin\theta |e^\uparrow p^\downarrow\rangle, \end{aligned} \quad (\text{B7})$$

where the mixing angle θ satisfies $\tan(2\theta) = 1/x$. Using the matrix elements $\langle \pm \frac{1}{2}, m_J | I_z | \pm \frac{1}{2}, m_J \rangle = \pm(\hbar/2)$, the nuclear target polarizations for the different states are obtained and given in Eq. (12) in the main text.

In the weak-field limit ($x \rightarrow 0$), states $|2\rangle$ and $|4\rangle$ have zero nuclear polarization, reflecting equal superposition of parallel and antiparallel nuclear-electron spin configurations. In the strong-field limit ($x \rightarrow \infty$), all states approach maximum nuclear polarization (± 1).

APPENDIX C: QUANTUM MECHANICAL ANALYSIS OF HYPERFINE TRANSITIONS

This appendix presents the quantum mechanical framework for analyzing beam-induced hyperfine transitions in hydrogen atoms using Breit-Rabi matrix elements and Fermi's golden rule [42,44]. While a full time-dependent solution of the hyperfine Hamiltonian would be required to compute exact state populations, the use of Fermi's golden rule is sufficient for identifying resonance conditions and estimating relative transition strengths relevant for depolarization risk assessment.

For hydrogen hyperfine transitions in a magnetic field, the interaction Hamiltonian with the beam-induced rf field follows from Appendix B, where the electronic coupling dominates and we have

$$H_1 \approx -g_J \mu_B \mathbf{J} \cdot \vec{B}_1(t). \quad (\text{C1})$$

The Breit-Rabi eigenstates at field B_0 are given in Eq. (B7), where states $|2\rangle$ and $|4\rangle$ are mixed superpositions of

uncoupled spin configurations, and the mixing angle satisfies $\tan(2\theta) = 1/x$ with x defined in Eq. (7).

The transition matrix elements depend on the orientation of the beam-induced rf field \vec{B}_1 relative to the static holding field \vec{B}_0 . As detailed in Sec. III B, there are six allowed single-photon transitions between the four hyperfine states, classified according to angular-momentum selection rules. π -transitions ($\vec{B}_1 \perp \vec{B}_0$) correspond to $\Delta m_F = \pm 1$ and are driven by the transverse operators J_x, J_y . σ -transitions ($\vec{B}_1 \parallel \vec{B}_0$) correspond to $\Delta m_F = 0$ and are driven by J_z . Two-photon transitions with $\Delta m_F = \pm 2$ are forbidden for single-photon processes and require much higher rf intensities to become significant; their entries are included for completeness but are negligible in practice.

Using Fermi's golden rule, the stimulated transition rate between hyperfine states $|i\rangle$ and $|j\rangle$ is

$$\Gamma_{ij}(f) = \frac{2\pi}{\hbar} |\langle j | H_1 | i \rangle|^2 S(f) V_{\text{int}}, \quad (\text{C2})$$

where $S(f) = B_1(f)^2 / (2\mu_0)$ is the spectral power density. It is convenient to factor out a common prefactor

$$\Gamma_0(f) \equiv \frac{2\pi}{\hbar} (g_I \mu_B)^2 S(f) V_{\text{int}} \left(\frac{\hbar}{2} \right)^2, \quad (\text{C3})$$

and define a dimensionless 4×4 matrix M such that $\Gamma_{ij} = \Gamma_0 M_{ij}$. Explicit evaluation of the Breit-Rabi matrix elements yields

$$M = \begin{pmatrix} 0 & \sin^2 \theta & 0 & \cos^2 \theta \\ \sin^2 \theta & 0 & \cos^2 \theta & \sin^2(2\theta) \\ 0 & \cos^2 \theta & 0 & \sin^2 \theta \\ \cos^2 \theta & \sin^2(2\theta) & \sin^2 \theta & 0 \end{pmatrix}. \quad (\text{C4})$$

Remark on orientation.

The labels “ π ” and “ σ ” are defined relative to the quantization axis set by the static holding field \vec{B}_0 . In the laboratory coordinates adopted here (z along the beam, y vertical, x horizontal), \vec{B}_0 may be aligned along any of these directions. Rotating \vec{B}_0 relabels which components of the rf field \vec{B}_1 are π (perpendicular) and σ (parallel). Consequently, a transition that is π for one choice of \vec{B}_0 may appear as σ for another. For conservative depolarization estimates one should therefore treat all nonzero couplings in Eq. (C4) as potentially active.

In explicit terms, the matrix entries can be interpreted as follows: (i) $M_{12} = M_{21}$ and $M_{34} = M_{43}$ are π -transitions with strength $\sin^2 \theta$, (ii) $M_{14} = M_{41}$ and $M_{23} = M_{32}$ are π -transitions with strength $\cos^2 \theta$, (iii) $M_{24} = M_{42}$ is the mixed σ -transition with strength $\sin^2(2\theta) = 1/(1+x^2)$, and (iv) $M_{13} = M_{31} = 0$ at first order; these channels correspond to $\Delta m_F = \pm 2$ two-photon processes and are negligible under realistic field intensities.

The diagonal elements vanish since no state can couple to itself. The off-diagonal entries directly represent squared matrix elements of the electron spin operators. The terms $\sin^2 \theta$ and $\cos^2 \theta$ arise from π -transitions driven by J_x, J_y with $\Delta m_F = \pm 1$, while $\sin^2(2\theta) = 1/(1+x^2)$ arises from the mixed σ -transition $|2\rangle \leftrightarrow |4\rangle$ driven by J_z with $\Delta m_F = 0$. The $|1\rangle \leftrightarrow |3\rangle$ entries are second-order (two-photon) transitions corresponding to $\Delta m_F = \pm 2$; these are negligible under realistic photon densities but are shown here for completeness.

This transition-rate matrix demonstrates that all hyperfine states are coupled through field-dependent transition strengths, making simple two-level approximations inadequate. It provides the basis for estimating effective depolarization rates: the fractional change in nuclear polarization during the atomic transit time τ_{int} is $\Delta Q/Q = \Gamma_{\text{depol}} \tau_{\text{int}}$, where Γ_{depol} is the effective depolarization rate obtained by summing over the relevant transitions.

-
- [1] F. Willeke and J. Beebe-Wang, Electron ion collider conceptual design report 2021, Technical Report No. BNL-221006-2021-FORE, Brookhaven National Laboratory (BNL), Upton, NY; Thomas Jefferson National Accelerator Facility (TJNAF), Newport News, VA, 2021, <https://www.osti.gov/servlets/purl/1765663/>.
 - [2] A. Accardi, J. L. Albacete, M. Anselmino, N. Armesto, E. C. Aschenauer, A. Bacchetta, D. Boer, W. K. Brooks, T. Burton, N.-B. Chang *et al.*, Electron-ion collider: The next QCD frontier: Understanding the glue that binds us all, *Eur. Phys. J. A* **52**, 268 (2016).
 - [3] R. Abdul Khalek *et al.*, Science requirements and detector concepts for the electron-ion collider: EIC yellow report, *Nucl. Phys.* **A1026**, 122447 (2022).
 - [4] A. Zelenski, G. Atoian, D. Raparia, J. Ritter, A. Kolmogorov, and V. Davydenko, The RHIC polarized H^- ion source, *AIP Conf. Proc.* **2011**, 070001 (2018).
 - [5] A. Zelenski, G. Atoian, E. Beebe, S. Ikeda, T. Kaneshue, S. Kondrashev, J. Maxwell, R. Milner, M. Musgrave, M. Okamura, A. Poblaguev, D. Raparia, J. Ritter, A. Sukhanov, and S. Trabocchi, Optically pumped polarized $^3\text{He}^{++}$ ion source development for RHIC/EIC, *Nucl. Instrum. Methods Phys. Res., Sect. A* **1055**, 168494 (2023).
 - [6] E. Wang, O. Rahman, J. Skaritka, W. Liu, J. Biswas, C. Degen, P. Inacker, R. Lambiase, and M. Paniccia, High voltage dc gun for high intensity polarized electron source, *Phys. Rev. Accel. Beams* **25**, 033401 (2022).
 - [7] E. Wang, O. Rahman, J. Biswas, J. Skaritka, P. Inacker, W. Liu, R. Napoli, and M. Paniccia, High-intensity polarized electron gun featuring distributed Bragg reflector GaAs photocathode, *Appl. Phys. Lett.* **124**, 254101 (2024).
 - [8] W. Fischer and A. Bazilevsky, Impact of three-dimensional polarization profiles on spin-dependent measurements in colliding beam experiments, *Phys. Rev. ST Accel. Beams* **15**, 041001 (2012).

- [9] V. H. Ranjbar, Calculating the polarization lifetime from the Thomas-Bargmann-Michel-Telegdi equation, *Phys. Rev. Accel. Beams* **22**, 091001 (2019).
- [10] H. Huang and K. Kurita, Fiddling carbon strings with polarized proton beams, *AIP Conf. Proc.* **868**, 3 (2006).
- [11] I. Alekseev *et al.*, Polarized proton collider at RHIC, *Nucl. Instrum. Methods Phys. Res., Sect. A* **499**, 392 (2003).
- [12] W. B. Schmidke, RHIC polarization for Runs 9–17, Technical Report No. BNL-209057-2018-TECH C-A/AP/609, Brookhaven National Laboratory, Collider Accelerator Department, 2018.
- [13] S. I. Mishnev, D. M. Nikolenko, S. G. Popov, I. A. Rachev, D. K. Toporkov, E. P. Tsentalovich, D. K. Vesnovsky, B. B. Wojtsekhowski, and V. G. Zelevinsky, Polarized deuteron target in an electron storage ring: Measurements and perspectives, in *High-Energy Spin Physics: 8th International Symposium (SPIN 1988)*, Minneapolis, MN, USA, edited by K. J. Heller, AIP Conference Proceedings Vol. 187 (American Institute of Physics, New York, 1989), pp. 1286–1301, [10.1063/1.38352](https://doi.org/10.1063/1.38352).
- [14] M. Ferro-Luzzi, Z.-L. Zhou, J. F. J. van den Brand, H. J. Bulten, J. Lang, and H. R. Poolman, Zeeman transitions in deuterium atoms induced by ultra-relativistic electrons, *Hyperfine Interact.* **110**, 239 (1997).
- [15] K. Ackerstaff *et al.* (HERMES Collaboration), Beam-induced nuclear depolarization in a gaseous polarized-hydrogen target, *Phys. Rev. Lett.* **82**, 1164 (1999).
- [16] A. Airapetian, N. Akopov, Z. Akopov, M. Amarian, A. Andrus, E. Aschenauer, W. Augustyniak, R. Avakian, A. Avetissian, E. Avetissian *et al.*, The HERMES polarized hydrogen and deuterium gas target in the HERA electron storage ring, *Nucl. Instrum. Methods Phys. Res., Sect. A* **540**, 68 (2005).
- [17] W. Haeberli, H-jet measures beam polarization at RHIC, *CERN Courier* **45N8**, 15 (2005), <https://cerncourier.com/a/h-jet-measures-beam-polarization-at-rhic/>.
- [18] A. A. Poblaguev *et al.*, Precision small scattering angle measurements of elastic proton-proton single and double spin analyzing powers at the RHIC hydrogen jet polarimeter, *Phys. Rev. Lett.* **123**, 162001 (2019).
- [19] M. Harrison, S. Peggs, and T. Roser, The RHIC accelerator, *Annu. Rev. Nucl. Part. Sci.* **52**, 425 (2002).
- [20] N. Akchurin *et al.*, Analyzing power measurement of pp elastic scattering in the coulomb-nuclear interference region with the 200-GeV/c polarized-proton beam at Fermilab, *Phys. Rev. D* **48**, 3026 (1993).
- [21] I. G. Alekseev, A. Bravar, G. Bunce, S. Dhawan, K. O. Eyser, R. Gill, W. Haeberli, H. Huang, O. Jinnouchi, A. Kponou, Y. Makdisi, I. Nakagawa, A. Nass, H. Okada, N. Saito, E. J. Stephenson, D. N. Svirida, T. Wise, J. Wood, and A. Zelenski, Measurements of single and double spin asymmetry in *pp* elastic scattering in the CNI region with a polarized atomic hydrogen gas jet target, *Phys. Rev. D* **79**, 094014 (2009).
- [22] N. H. Buttimore, A helium-3 polarimeter using electromagnetic interference, *Proc. Sci. PSTP2013* (2013) 057.
- [23] B. Z. Kopeliovich and L. I. Lapidus, On the necessity of polarization experiments in colliding pp and anti-pp beams, *Yad. Fiz.* **19**, 218 (1974).
- [24] N. H. Buttimore, E. Gotsman, and E. Leader, Spin-dependent phenomena induced by electromagnetic-hadronic interference at high energies, *Phys. Rev. D* **18**, 694 (1978).
- [25] N. H. Buttimore, B. Z. Kopeliovich, E. Leader, J. Soffer, and T. L. Trueman, Spin dependence of high energy proton scattering, *Phys. Rev. D* **59**, 114010 (1999).
- [26] This can be rewritten as $\mu_p = 2(1+G)\mu_N = 2\mu_N + 2G\mu_N$, showing explicitly that the anomalous contribution $\mu_p^{\text{anom}} = 2G\mu_N$ reflects the deviation from the Dirac value $2\mu_N$.
- [27] M. Diermaier, C. B. Jepsen, B. Kolbinger, C. Malbrunot, O. Masiczek, C. Sauerzopf, M. C. Simon, J. Zmeskal, and E. Widmann, In-beam measurement of the hydrogen hyperfine splitting and prospects for antihydrogen spectroscopy, *Nat. Commun.* **8**, 15749 (2017).
- [28] E. Tiesinga, P. J. Mohr, D. B. Newell, and B. N. Taylor, CODATA recommended values of the fundamental physical constants: 2018, *Rev. Mod. Phys.* **93**, 025010 (2021).
- [29] A. Zelenski, A. Bravar, D. Graham, W. Haeberli, S. Kokhanovski, Y. Makdisi, G. Mahler, A. Nass, J. Ritter, T. Wise, and V. Zubets, Absolute polarized H-jet polarimeter development, for RHIC, *Nucl. Instrum. Methods Phys. Res., Sect. A* **536**, 248 (2005).
- [30] G. Bunce, N. Saito, J. Soffer, and W. Vogelsang, Prospects for spin physics at RHIC, *Annu. Rev. Nucl. Part. Sci.* **50**, 525 (2000).
- [31] A. Poblaguev, A. Zelenski, G. Atoian, Y. Makdisi, and J. Ritter, Systematic error analysis in the absolute hydrogen gas jet polarimeter at RHIC, *Nucl. Instrum. Methods Phys. Res., Sect. A* **976**, 164261 (2020).
- [32] M. Mikirtychyants, R. Engels, K. Grigoryev, H. Kleines, P. Kravtsov, S. Lorenz, M. Nekipelov, V. Nelyubin, F. Rathmann, J. Sarkadi, H. Paetz gen. Schieck, H. Seyfarth, E. Steffens, H. Ströher, and A. Vasilyev, The polarized H and D atomic beam source for ANKE at COSY-Jülich, *Nucl. Instrum. Methods Phys. Res., Sect. A* **721**, 83 (2013).
- [33] A. Nass *et al.*, The HERMES polarized atomic beam source, *Nucl. Instrum. Methods Phys. Res., Sect. A* **505**, 633 (2003).
- [34] A. Naß, Niederdruck-Überschallexpansionen: Eine Studie zur Formation von kalten Wasserstoff- und Deuteriumatomstrahlen für polarisierte Gastargets, Ph.D. thesis, U. Erlangen-Nuremberg (main), 2002, [10.3204/DESY-THE-SIS-2002-012](https://doi.org/10.3204/DESY-THE-SIS-2002-012).
- [35] Here the Madison convention is used [36,37], which employs Cartesian observables (A_y, A_{yy}, A_{xx} , etc.) relative to the beam and scattering plane, rather than the spherical tensor notation (A_N, A_{NN} , etc.) of the Ann Arbor convention [38]. The Madison convention is more natural for fixed target experiments with inherently Cartesian coordinate systems.
- [36] G. G. Ohlsen, Polarization transfer and spin correlation experiments in nuclear physics, *Rep. Prog. Phys.* **35**, 717 (1972).
- [37] Madison convention, in *Polarization Phenomena in Nuclear Reactions: Proceedings of the 3rd International Symposium on Polarization Phenomena in Nuclear Reactions*, edited by H. H. Barschall and W. Haeberli

- (University of Wisconsin Press, Madison, Wisconsin, 1971), p. XXV
- [38] J. Ashkin, E. Leader, M. L. Marshak, J. B. Roberts, J. Soffer, and G. H. Thomas, Convention for spin parameters in high-energy scattering experiments, *AIP Conf. Proc.* **42**, 142 (1978).
- [39] R. C. Hanna, Some experimental aspects of the use of polarized beams, in *Proceedings of the 2nd International Symposium on Polarization Phenomena of Nucleons*, edited by P. Huber and H. Schopper (Birkhäuser Verlag, Basel, Switzerland, 1966), pp. 280–287.
- [40] F. Rathmann, B. von Przewoski, W. A. Dezarn, J. Doskow, M. Dziedzic, W. Haerberli, J. G. Hardie, B. Lorentz, H. O. Meyer, P. V. Pancella, R. E. Pollock, T. Rinckel, F. Sperisen, and T. Wise, Complete angular distribution measurements of pp spin correlation parameters A_{xx} , A_{yy} , and A_{xz} and analyzing power A_y at 197.4 MeV, *Phys. Rev. C* **58**, 658 (1998).
- [41] B. v. Przewoski, F. Rathmann, W. A. Dezarn, J. Doskow, M. Dziedzic, W. Haerberli, J. G. Hardie, B. Lorentz, H. O. Meyer, P. V. Pancella, R. E. Pollock, T. Rinckel, F. Sperisen, and T. Wise, Proton-proton analyzing power and spin correlation measurements between 250 and 450 MeV $7^\circ \leq \theta(\text{c.m.}) \leq 90^\circ$ with an internal target in a storage ring, *Phys. Rev. C* **58**, 1897 (1998).
- [42] N. F. Ramsey, *Molecular Beams* (Oxford University Press, Oxford, UK, 1956).
- [43] W. Haerberli, Sources of polarized ions, *Annu. Rev. Nucl. Part. Sci.* **17**, 373 (1967).
- [44] C. Cohen-Tannoudji, B. Diu, and F. Laloë, *Quantenmechanik*, 2nd ed. (de Gruyter, Berlin, 1999).
- [45] G. Breit and I. I. Rabi, Measurement of nuclear spin, *Phys. Rev.* **38**, 2082 (1931).
- [46] A similar classification scheme was used in the analysis of beam-induced depolarization at the HERMES experiment at DESY, where rf fields generated by the HERA electron beam lead to transitions between hyperfine states of hydrogen and deuterium atoms in the polarized storage cell gas target [15,16].
- [47] The effective magnetic moment can be defined as $\mu_{\text{eff}} = -\frac{dE}{dB}$, where E is the energy of a state from the Breit-Rabi formula in Eq. (6).
- [48] FFT stands for fast Fourier transform, a computational algorithm used to efficiently evaluate the discrete Fourier transform (DFT) of a signal, converting it from the time domain into its frequency components.
- [49] T. Wise, M. Chapman, W. Haerberli, H. Kolster, and P. Quin, An optimization study for the RHIC polarized jet target, *Nucl. Instrum. Methods Phys. Res., Sect. A* **556**, 1 (2006).
- [50] S. Y. Lee, *Accelerator Physics*, 3rd ed. (World Scientific, Singapore, 2011).
- [51] A. Zelenski, G. Atoian, A. Bogdanov, D. Raparia, M. Runtso, and E. Stephenson, Precision, absolute proton polarization measurements at 200 MeV beam energy, *J. Phys. Conf. Ser.* **295**, 012132 (2011).
- [52] A. Accardi *et al.* (LHCspin Collaboration), LHCspin: A polarized gas target for LHC, [arXiv:2504.16034](https://arxiv.org/abs/2504.16034).