

Implementation of Developed Storage Material for First Prototypes of High-Temperature Rechargeable Oxide Batteries (ROB)

O.A. Tokariev, C.M. Berger, P. Orzessek, W. Braun, Q. Fang,
W.J. Quadackers, L. Blum, N.H. Menzler, O. Guillon

DKG-2015, Bayreuth, Germany

Outline

- Motivation and ROB advantages
- Working principle of the battery
- Storage material and its selection
- Battery test
- Conclusions
- Outlook

Motivation

German national energy concept of power generation – plan for 2050




Statistisches Bundesamt, Feb. 2012

Storage concepts

- ✓ Pumped-storage hydroelectricity
- ✓ Electrolysis
- ✓ Electrolysis + Methanation
- ✓ Rechargeable batteries


Renewable energy requires storage to be able to balance demand and supply

From Cell to ROB Battery

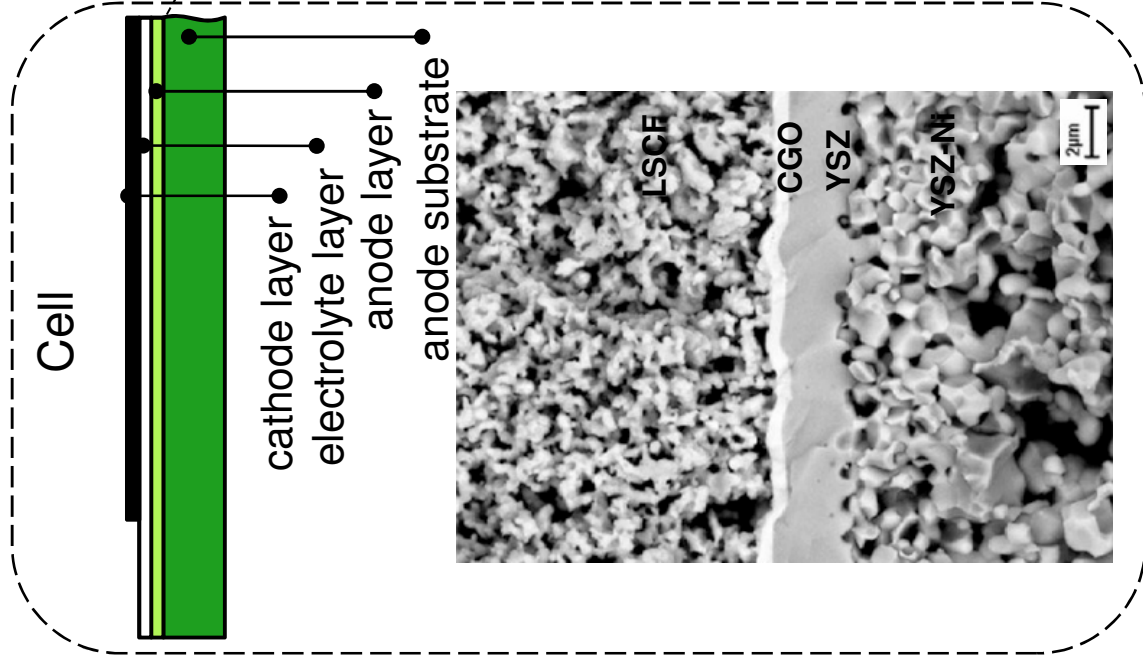


D. Roehrens et al., *International journal of hydrogen energy* (2015)

Rechargeable oxide battery

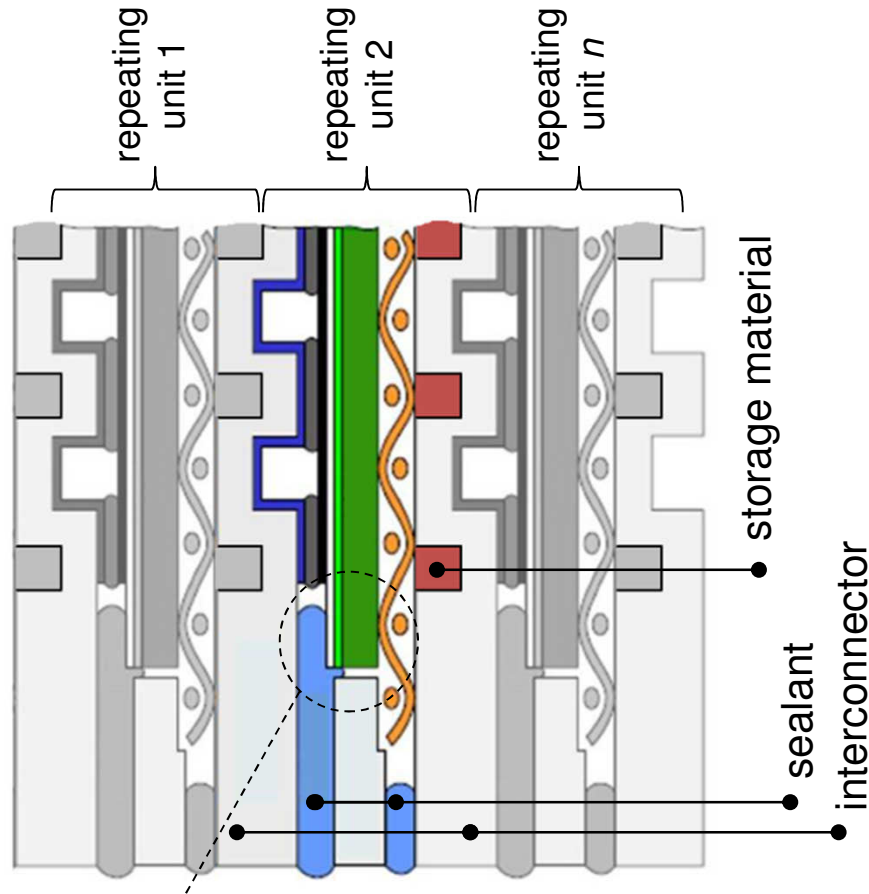



Requirements: evenness, thickness uniformity, reproducibility, homogeneity, gas tightness, stackability

Rechargeable Oxide Battery (working principle)

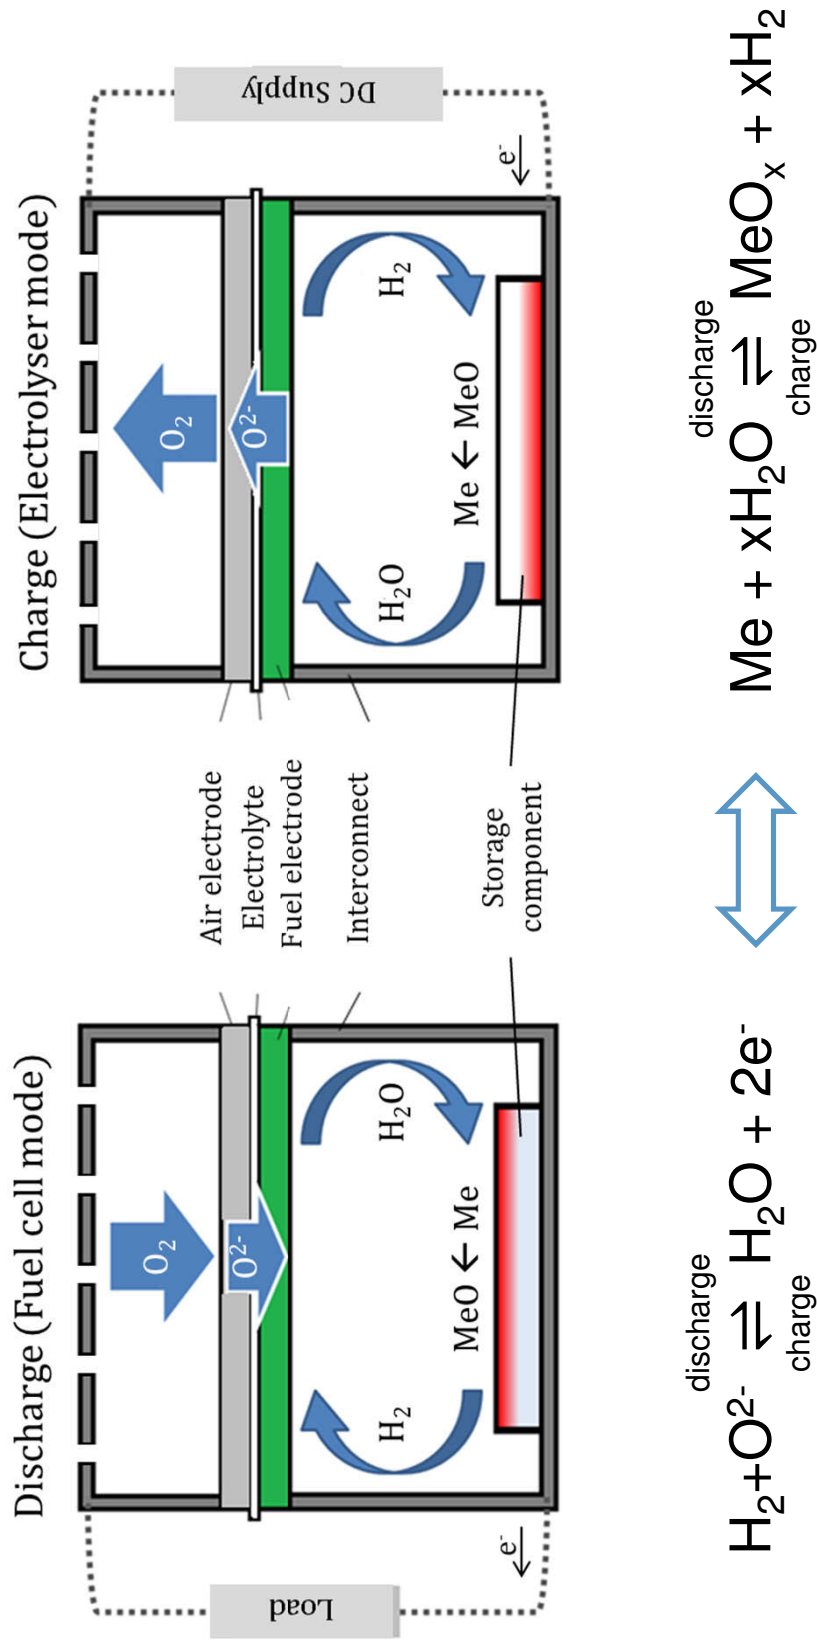

State of the storage is responsible for such characteristics: oxygen capacity, structural stability, rate capacity, metal utilization and cycle life

Storage: Materials and Limits

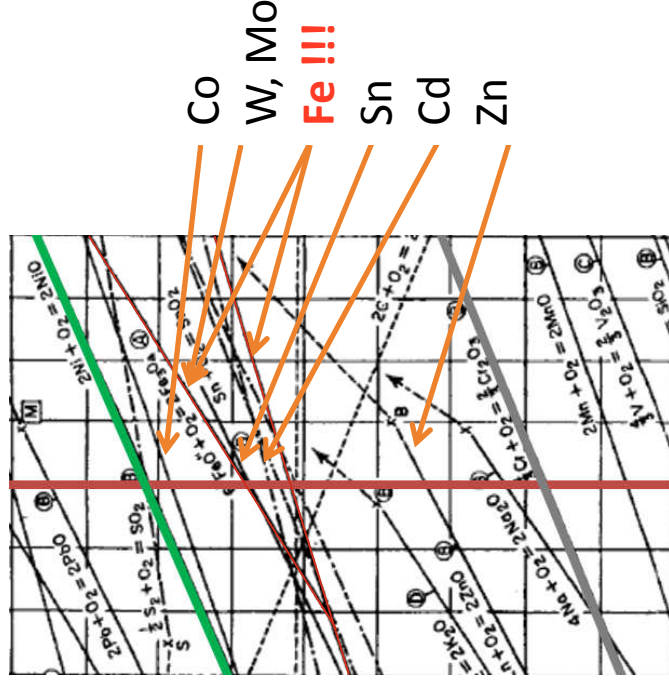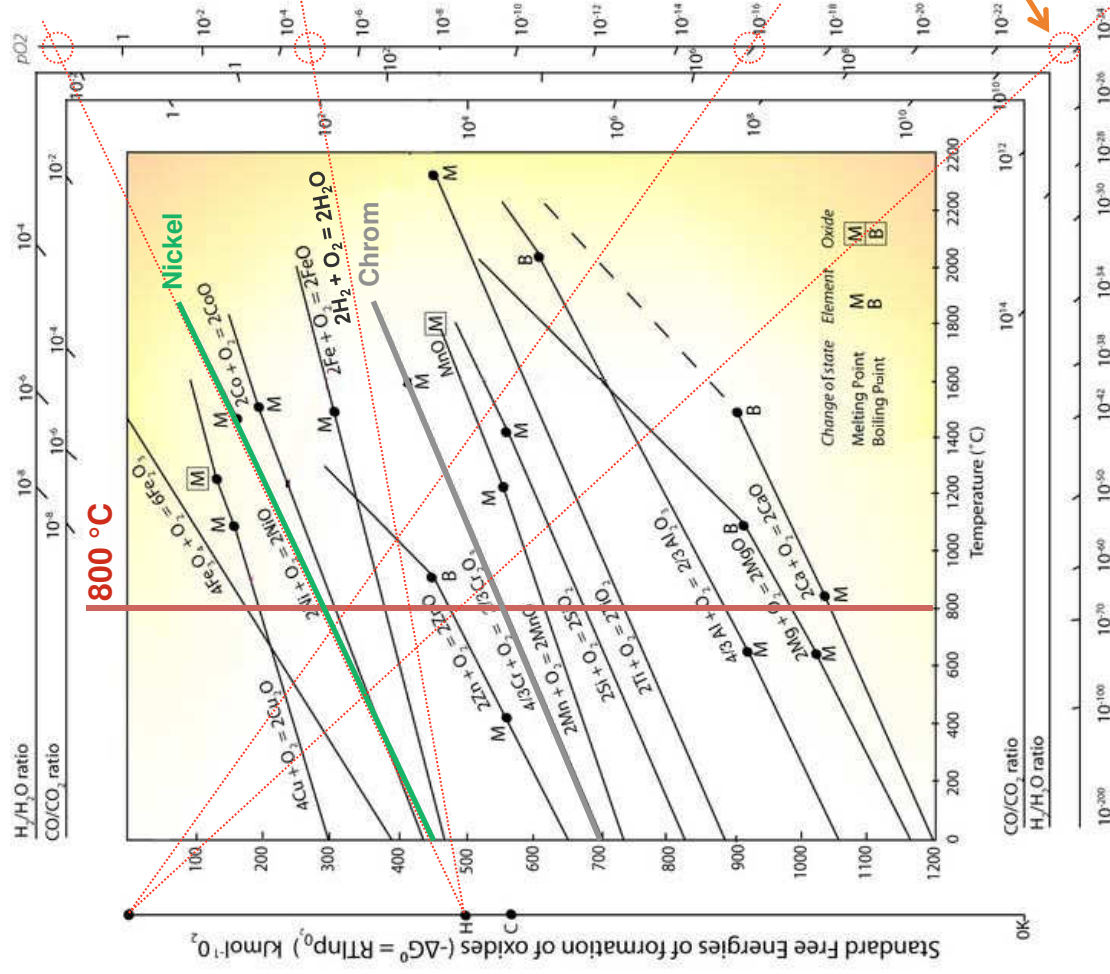

Oxidation of Nickel
 $p_{O_2} < 10^{-16}$ bar

Decomposition of interconnect
oxide scale: $p_{O_2} \approx 10^{-24}$ bar


Among other metals iron shows required properties for O_2 storage and its release

Research Approach


Manufacturing of storage material
pressing tape casting extrusion






Redox cycling in furnace
 $\text{Ar-2\%H}_2 \leftrightarrow \text{Ar-2\%H}_2 - 7\%\text{H}_2\text{O}$




Battery test

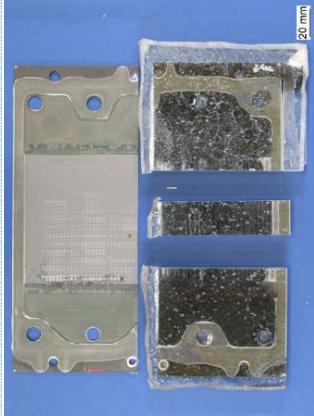


Investigations (morphology, porosity, kinetics)

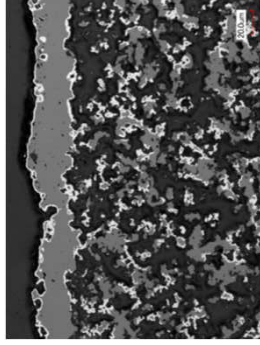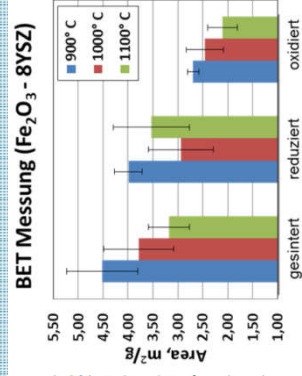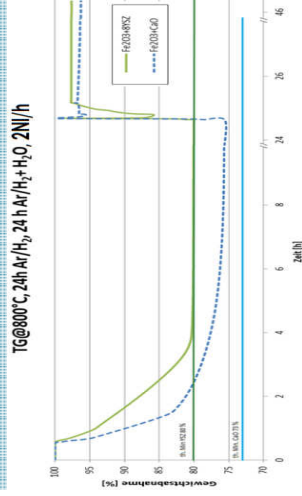


Pure Iron Oxide (without support matrix)

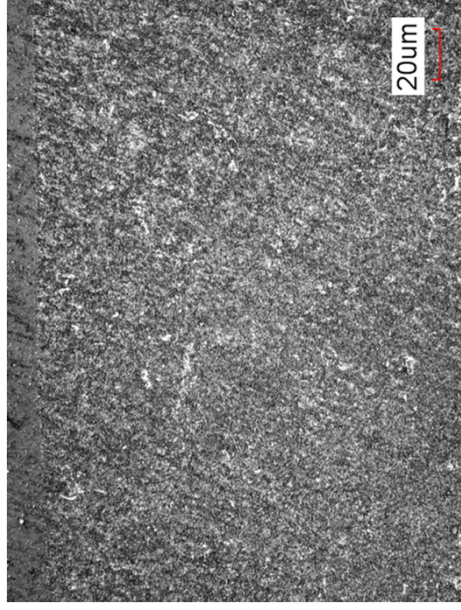


As sintered (900 °C, 5K/min, 3h, air)

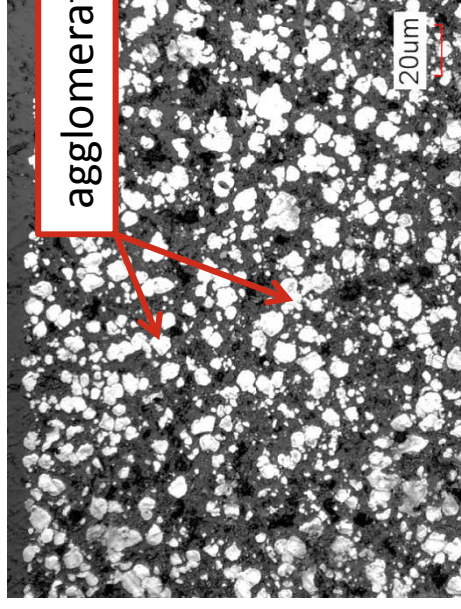

Reduced in Ar+2%H₂ @800 °C for 10 h
(1. half cycle)

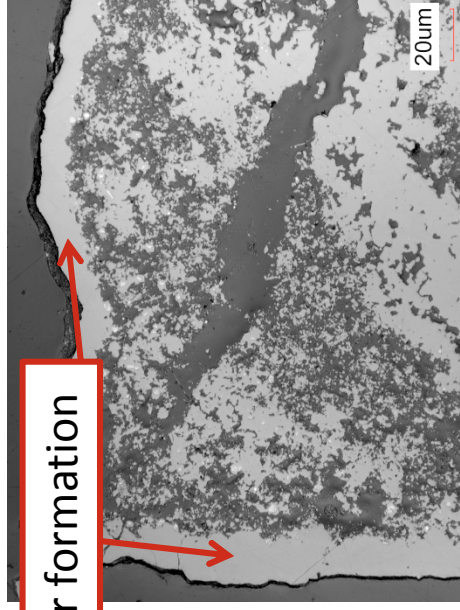


Oxidised in Ar+2%H₂+7%H₂O @800 °C
(10. half cycle)

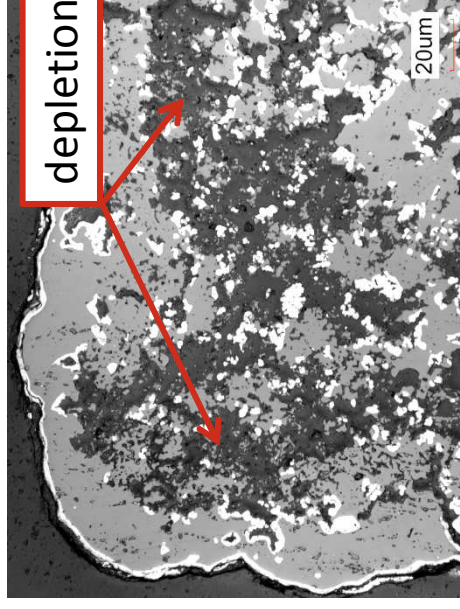


Reduced in Ar+2%H₂ @800 °C for 10 h
(11. half cycle)

Iron-layer formation and agglomeration → rapid degradation

Iron Oxide with 8YSZ (inert matrix)

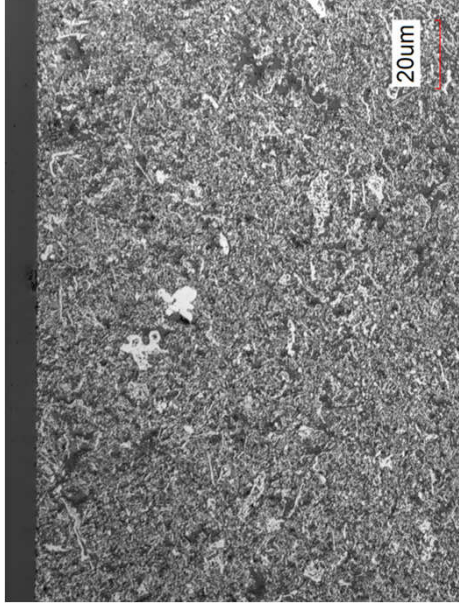


As sintered (900 °C, 5K/min, 3h, air)

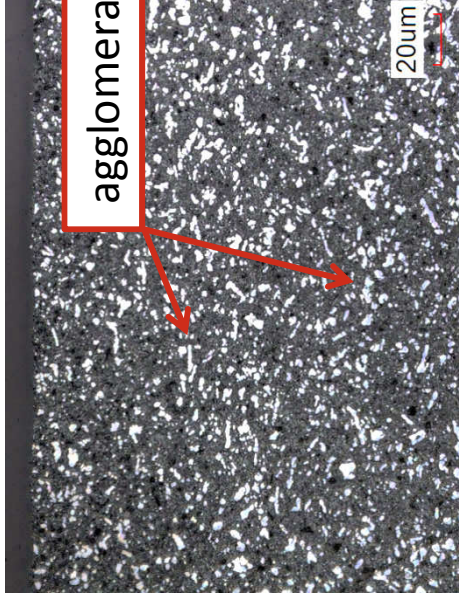


agglomeration

Reduced in Ar+2%H₂ @800 °C for 10 h
(1. half cycle)

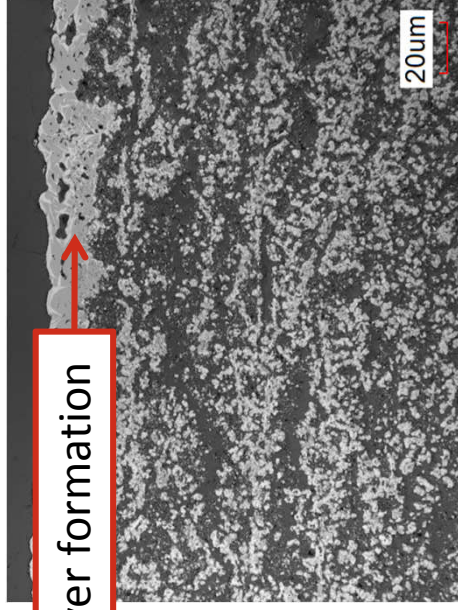

Fe-layer formation

Oxidised in Ar+2%H₂+7%H₂O @800 °C
(10. half cycle)

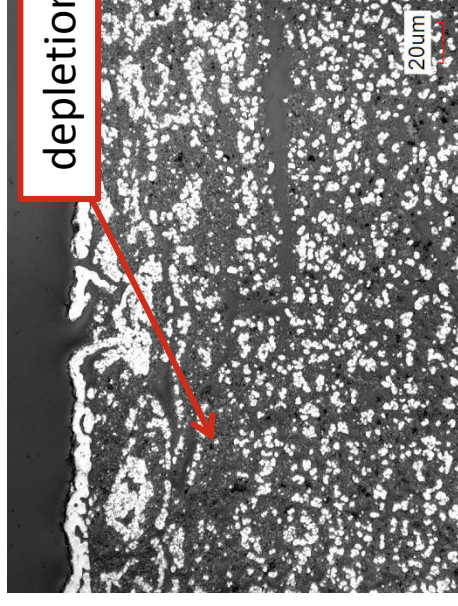


depletion

Reduced in Ar+2%H₂ @800 °C for 10 h
(11. half cycle)


Less extensive iron-layer formation and agglomeration → slower degradation

Iron Oxide with CaO (reactive matrix)

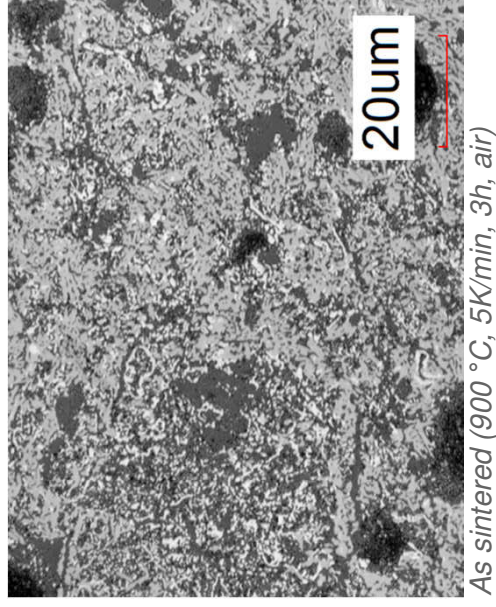


layer formation

layer decomposition

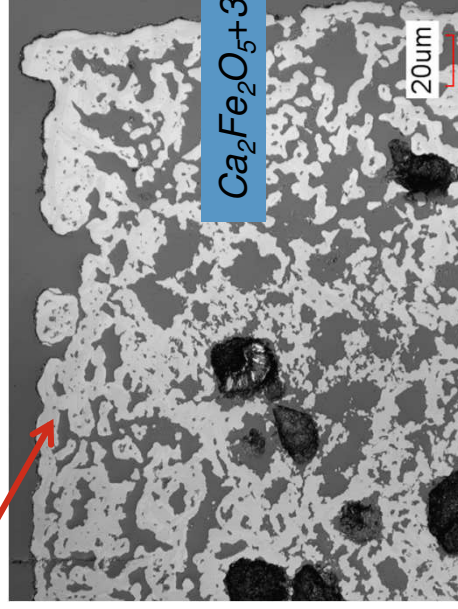


Oxidised in Ar+2%H₂+7%H₂O @800 °C
(10. half cycle)

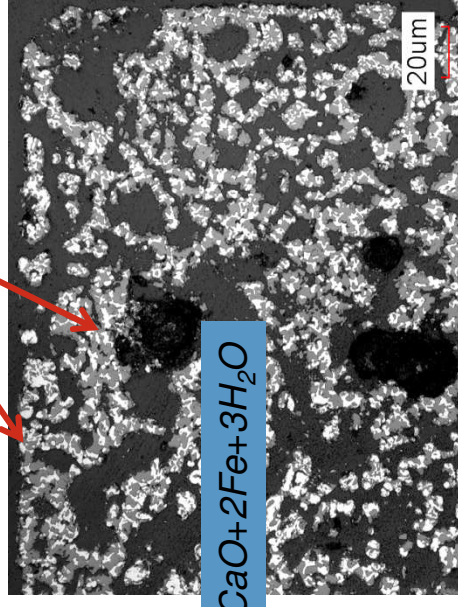



Reduced in Ar+2%H₂ @800 °C for 10 h
(11. half cycle)

Possible prevention of sintering effect and outer layer formation

Dip-Coated Storage (green state)

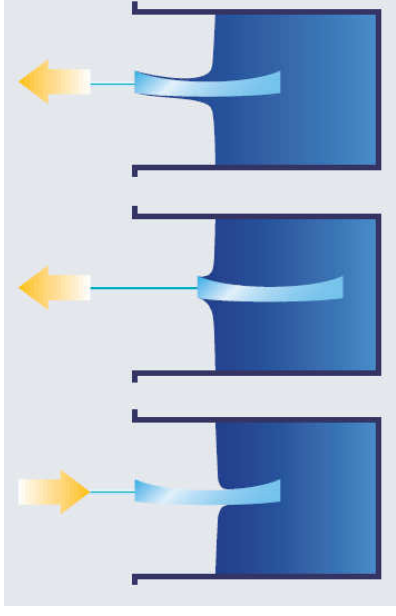



<http://bimas.lt/akys/literatura.pdf>

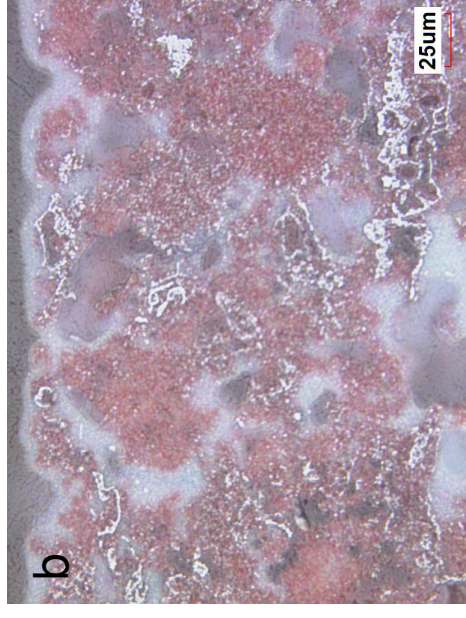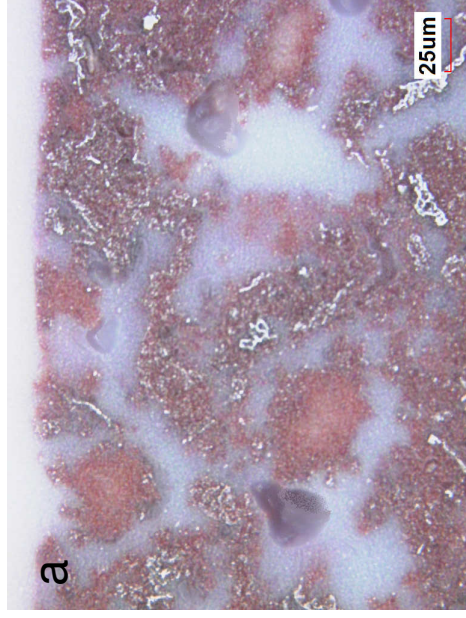

Fe_2O_3 /8YSZ ($\leq 1 \mu\text{m}$) 70/30 vol% non-sintered specimens after dip-coating in: **(a)** viscous and **(b)** dilute (50% solvent) 8YSZ ($d_{50} \sim 150\text{nm}$) slurry



Additional filling of voids by inert porous material might sufficiently reduce a drastic iron migration towards the surface

Tape-Cast Storage $\text{Fe}_2\text{O}_3/\text{Al}_2\text{O}_3$ (x μm) (effect of particle size)

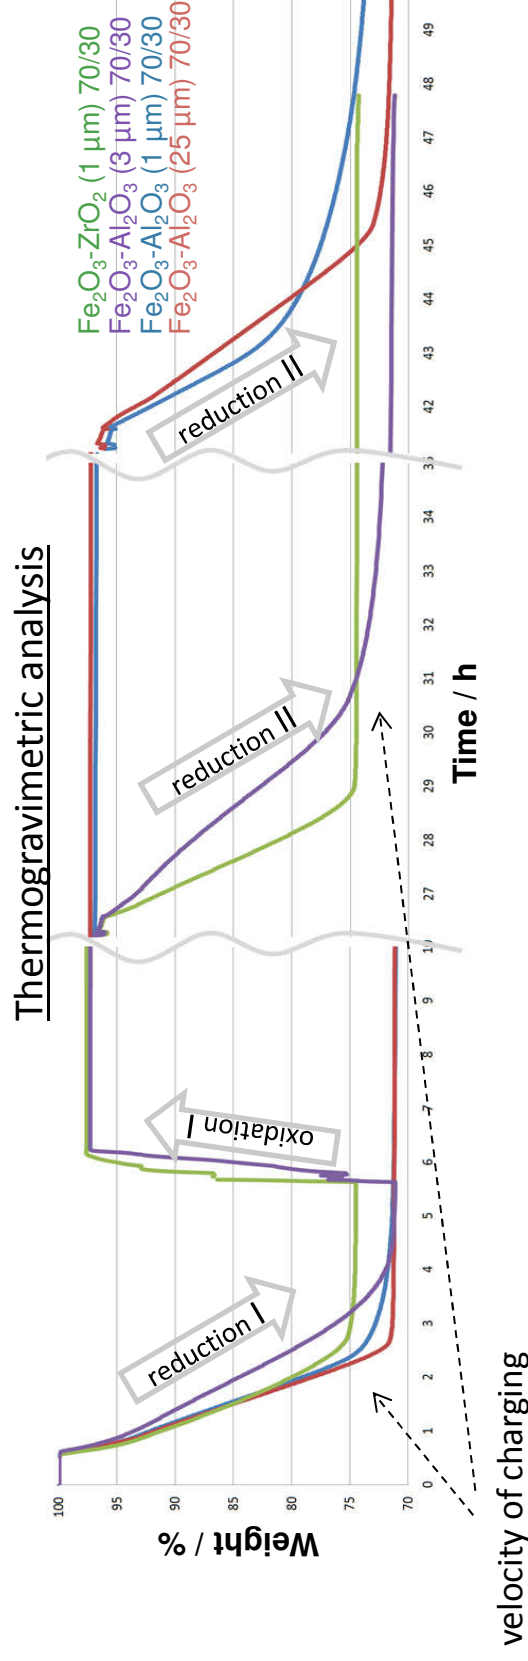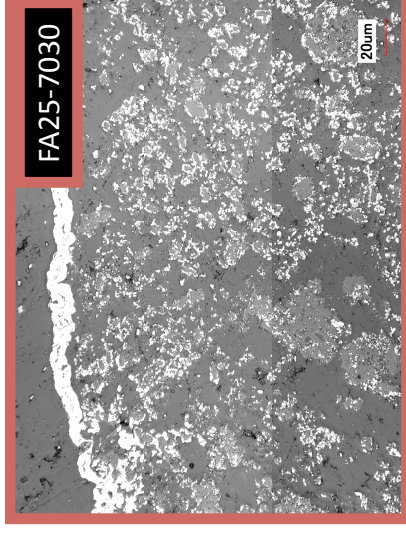


The more rapidly material gets reduced, the faster battery charging is expected

Redox Cycling in TG-facility (10 cycles) (trend of degradation)

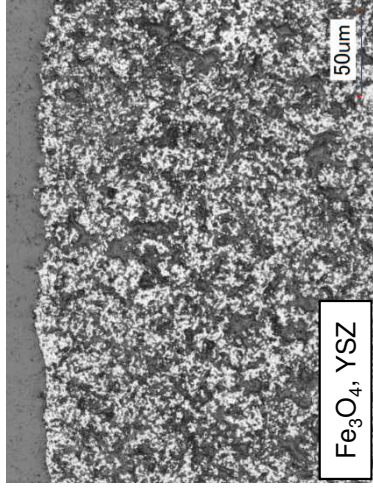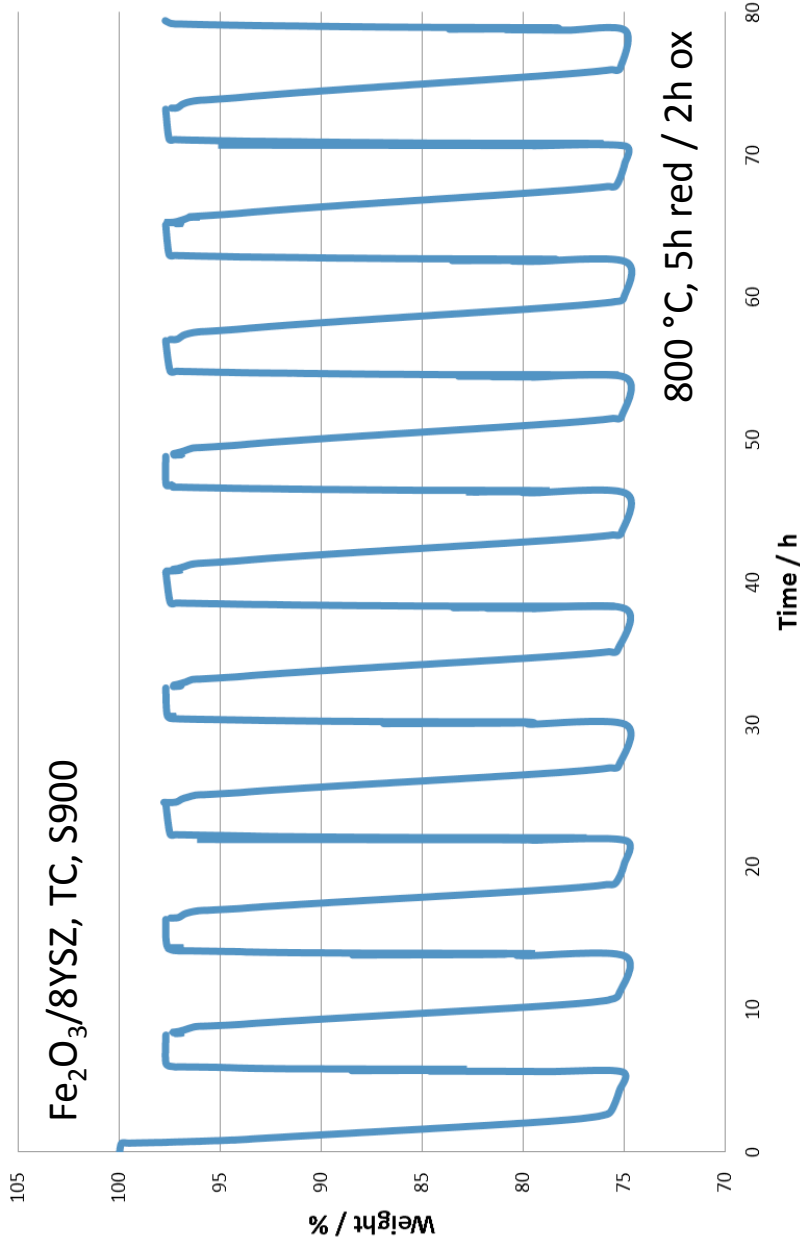


After 10 cycles the TG-results show no storage degradation.
To reveal a “start point” of degradation the number of cycles
and their duration have to be changed.


Combination of Thermogravimetry and Mass Spectrometry (TG-MS)

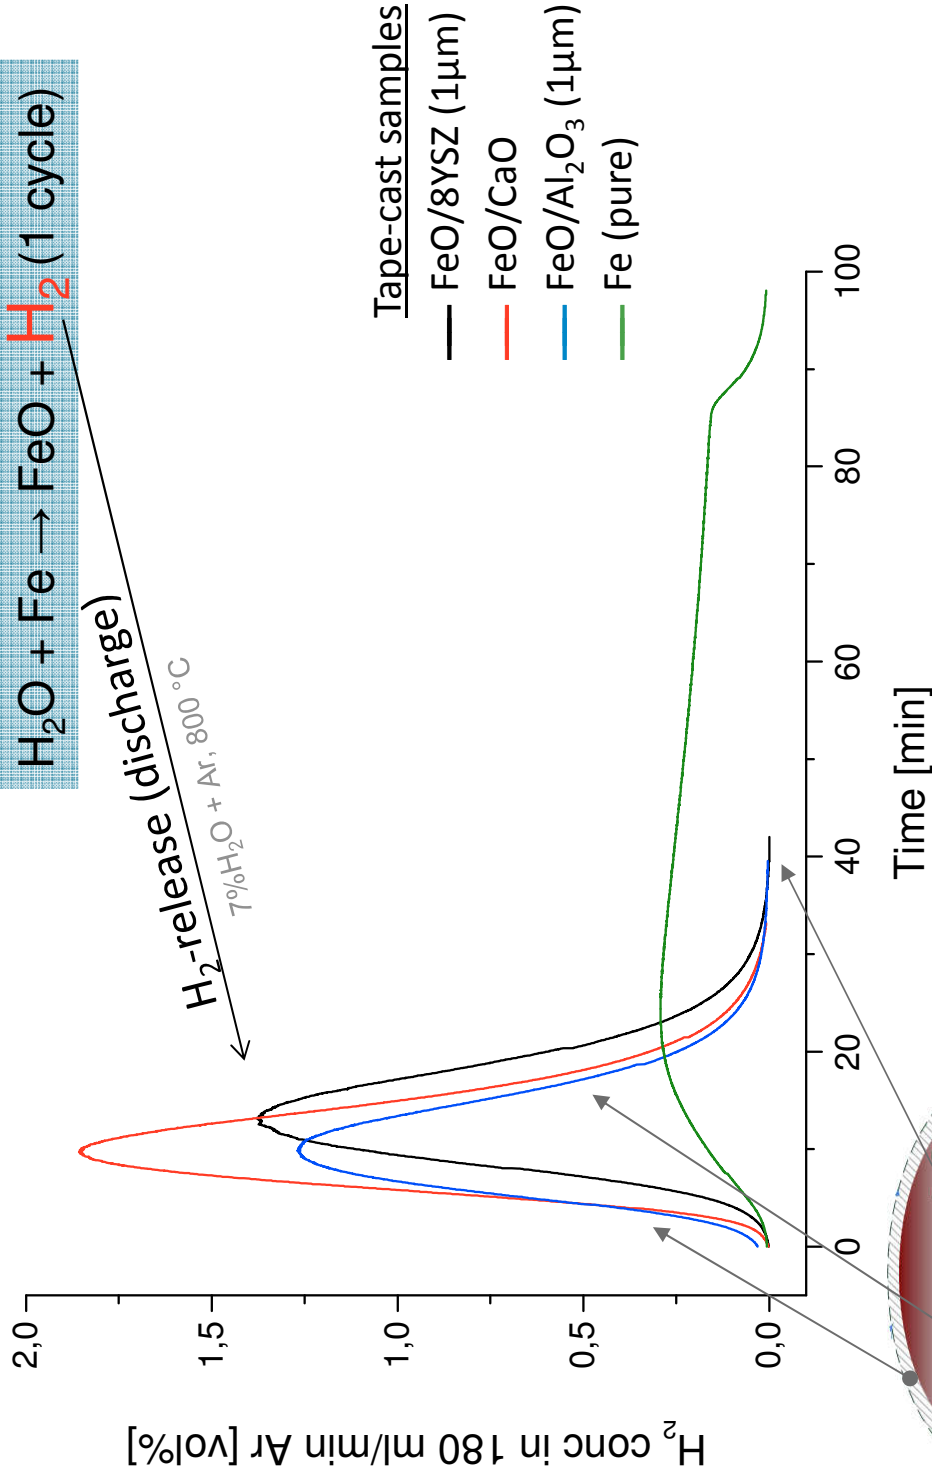


FeO/CaO composition exhibits better kinetics and O₂-storage

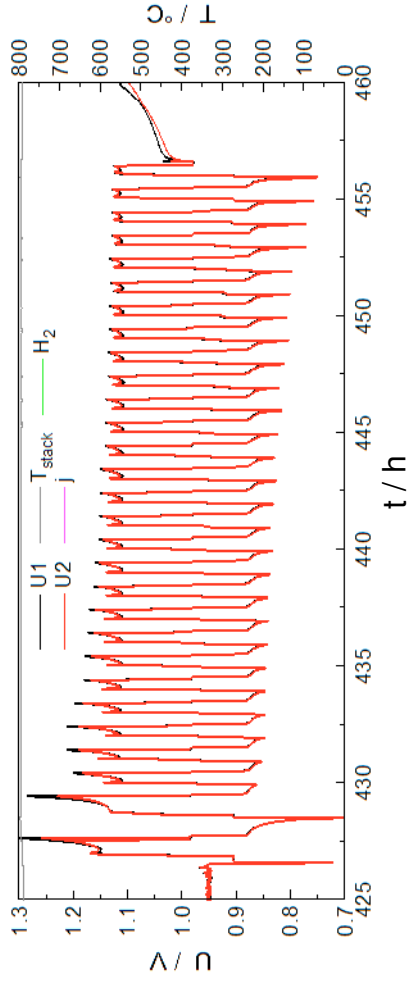

Results of a two-cell stack with tape-cast storage components made of Fe_2O_3 and 8YSZ sintered at 1000° , operated at 150 mA/cm^2

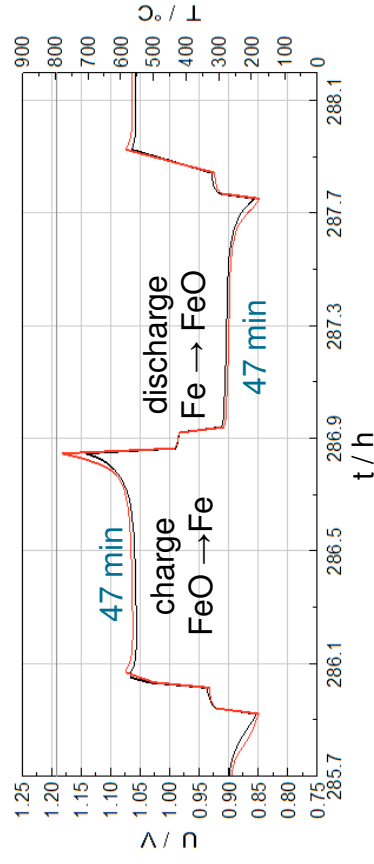


47 min / half cycle, 150 mA/cm^2 , $0.8\text{-}1.2 \text{ V/cell}$, storage usage $\sim 70\text{-}80 \%$

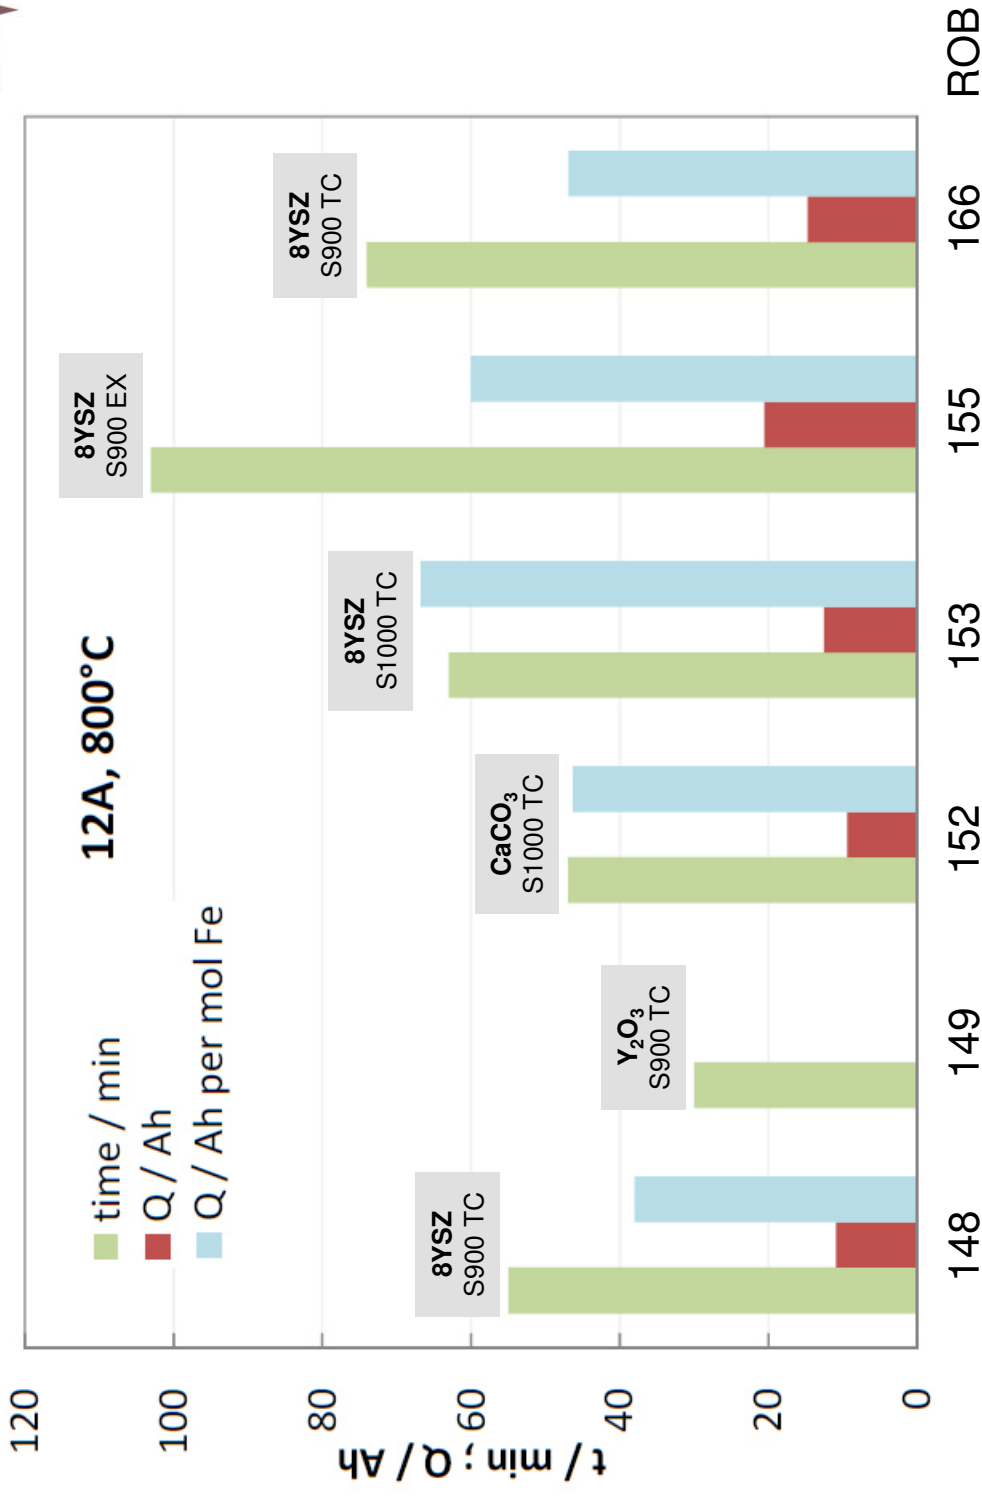


The calculated storage capacity of ROB-153 is ~ 70 Ah for 1 mol Fe, which shows better battery performance among others. Amount of storage influences the capacity.


Battery Post-Test Analysis (ROB 153 after 260 cycles)

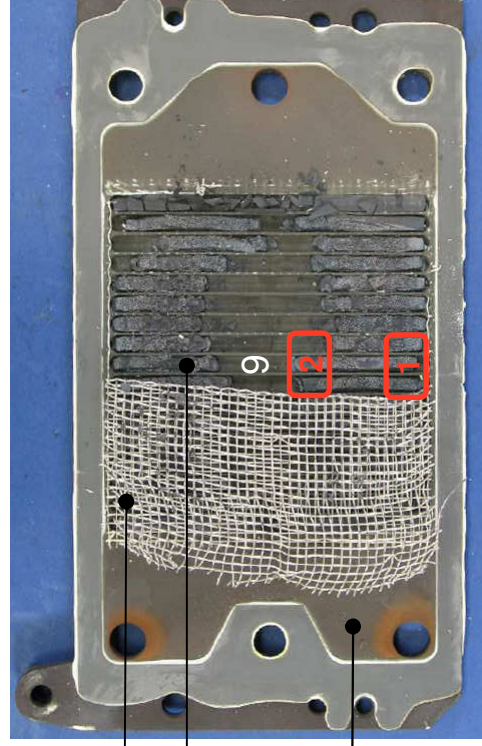

XRD
REM
XPS

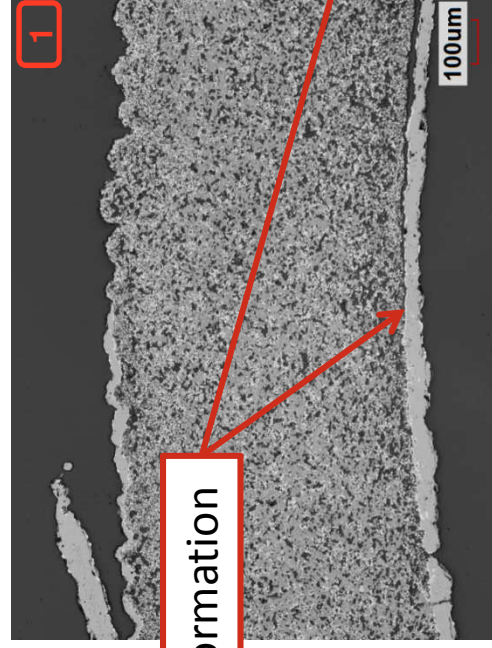

Cross-section of storage Fe/8YSZ (channel 9, edge)

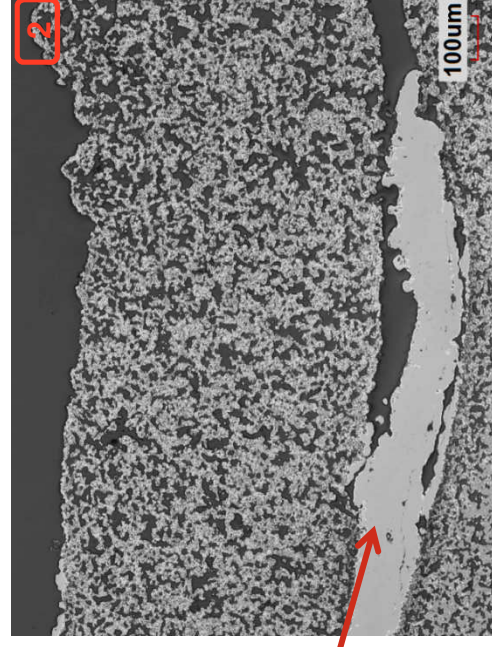

Cross-section of storage Fe/8YSZ (channel 9, centre)

Different storage structures might be related to non-uniform temperature and gas consumption (inflow), which might lead to non-uniform power generation

Conclusions

- The working principle of the rechargeable oxide battery (ROB) was proven
- Stability of the storage material can be increased by adding oxide matrices
- Thermogravimetry, mass-spectrometry, porosimetry and microscopic investigations after laboratory redox cycling, as the tools to qualitatively understand/predict behaviour of the storage under battery conditions

Outlook


- Improvement of the battery efficiency by advanced storage concept, lower operating temperature (600°C) as well as optimised battery design
- Investigation and scientific explanation of the model, which might reveal the degradation mechanism of storage material
- Experimental modelling of storage behaviour avoiding expensive battery operation

Acknowledgements



The authors would like to acknowledge all colleagues who contributed to this research at JÜLICH and the German Federal Ministry of Education and Research for providing financial support within the project:

“Elektrochemische Metall-Metalloxid-Hochtemperaturspeicher für zentrale und dezentrale stationäre Anwendungen (MeMO)” (No 03EK3017)

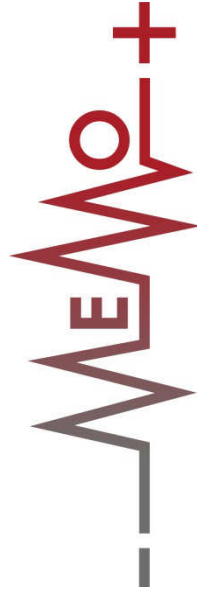


Bundesministerium
für Bildung
und Forschung




APPENDIX

Fe₂O₃/8YSZ 70/30 vol%

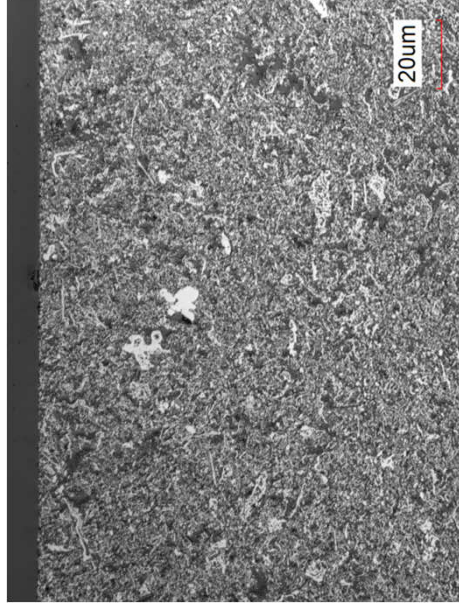

As sintered (900 °C, 5K/min, 3h, air)

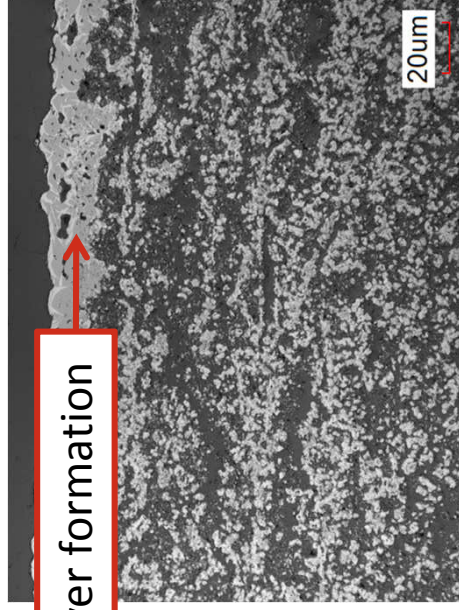


Oxidised in Ar+2%H₂+7%H₂O @800 °C
(10. half cycle)

Fe-layer formation



Reduced in Ar+2%H₂ @800 °C for 10 h
(1. half cycle)

agglomeration

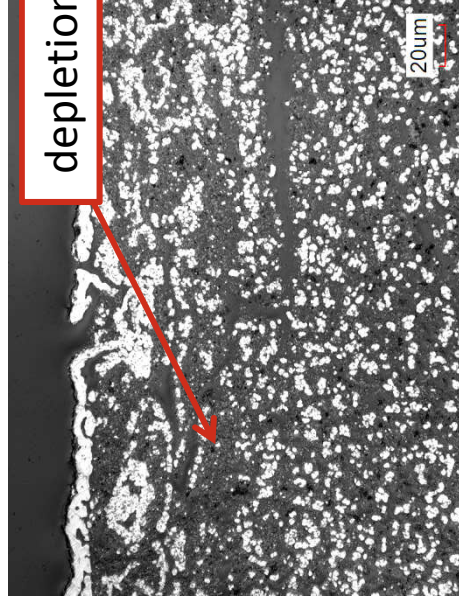

Reduced in Ar+2%H₂ @800 °C for 10 h
(11. half cycle)

depletion