

Fuel retention in L and H mode experiments in JET

T Loarer¹, V Philipps², J Bucalossi¹, JH Brzozowski³, G Esser², S Grünhagen⁴, J Hobirk⁵, S Knipe⁶, A Kreter², Ph Morgan⁶, R Stagg⁶, L Worth⁶, N Balshaw⁶, D Brennan⁶, R Clarke⁶ and JET-EFDA Contributors*

¹Association EURATOM-CEA, DSM-DRFC, CEA Cadarache, 13108 St Paul lez Durance, France.

²IPP, Forschungszentrum Juelich, D-52425 Juelich, Germany

³EURATOM/VR Association - Fusion Plasma Physics, EES, KTH, Stockholm, Sweden

⁴Forschungszentrum Karlsruhe, Postfach 3640, D-76021 Karlsruhe, Germany

⁵Max-Planck IPP-EURATOM Association, Garching, Germany

⁶Euratom-UKAEA Association, Fusion Culham Science Centre, Abingdon, OX14 3EA, UK.

*See Appendix of M.L. Watkins et al., FEC. 2006 (Proc. 21st Int. Conf. Chengdu) IAEA, (2006)

I - Introduction

In ITER, a retention of 10% of the tritium injected (T injection rate $\sim 5 \times 10^{22} \text{T s}^{-1}$) during the 400 sec of burning phase would lead to the limit of 350g (nuclear licensing) in only 35 discharges. Thus the evaluation of fuel retention in present tokamaks is of high priority to establish a database for ITER, for which gas balance will be the dominant technique used to assess the fuel retention. In order to achieve high accuracy and to minimise the contribution from previous experiments (history), the overall particle balance has been studied in JET in a series of repetitive and identical discharges. The particle retention behaviour has been analysed for L and H-modes (type III and I ELMs). The resulting fuel retentions for these different plasma scenarios are reported in this paper and will be used as a reference for the comparison with the long term retention resulting from the use of different materials for plasma facing components for the future ITER-like Wall project of JET [1].

II - Experiments

The two basic mechanisms for long term fuel retention are the deep implantation (diffusion/migration in the bulk material) and the codeposition of D with carbon and/or Beryllium. In JET (and also in other carbon devices) codeposition is suspected to dominate the long term retention as it is also expected for the Be/W wall in JET and in ITER. A series of consecutive and repetitive discharges has been performed in L mode, Type III and Type I ELMing H modes with the following main parameters: $I_p=2\text{MA}$, $B_T=2.4\text{T}$, $\langle n_e \rangle = 4.5 \times 10^{19} \text{m}^{-3}$, gas rate $\sim 0.6-1.8 \times 10^{22} \text{Ds}^{-1}$ with 10+3MW of NBI and ICRH respectively for the type I ELMing H mode (5 pulses), 6MW of ICRH only for the type III ELM experiments (13 pulses) and 1.5MW of ICRH only for the L-mode experiments (6 pulses). For all the experiments, active pumping was ensured by the divertor cryopump only (all main chamber pumps closed) and its regeneration (to liquid nitrogen temperature) before and after the series (\sim at least 1/2 hour after the last pulse) thus allows a direct measure of the long term retention. The

accuracy of the calibrated gas injection and regeneration in the active gas handling system at JET from the cryopumps has been measured in dry runs to be better than 1.2%. In all of the series, repetitive and reproducible plasma conditions were obtained for all shots. There was no particular wall conditioning before the experiments (neither He glow discharge cleaning, nor Beryllium evaporation) and disruptions were also avoided for all the series, except for one pulse of the series of type I ELMy H-modes, which however did not led to a higher outgassing and did not affect the conclusions. The overall results for these three different scenarios are reported in table I. When averaged over the heating phase, the long term retention is $\sim 1.74 \times 10^{21} \text{Ds}^{-1}$ for the L-mode, $1.3 \sim 10^{21} \text{Ds}^{-1}$ for the Type III ELMy H-mode and $2.83 \times 10^{21} \text{Ds}^{-1}$ for the Type I ELMy H-modes. This corresponds to long term retention fractions of $\sim 11\%$, 18% and 13% respectively of the injected flux.

	Total Injected	Total recovered (cryopump regeneration)	Long term Retention (heating phase)
L Mode	$1.35 \times 10^{24} \text{ D (4.51 g)}$	$1.208 \times 10^{24} \text{ D (3.95 g)}$	$1.74 \times 10^{21} \text{Ds}^{-1} \text{ (81 s)}$
H-mode Type III	$1.48 \times 10^{24} \text{ D (4.95 g)}$	$2.611 \times 10^{24} \text{ D (4.08 g)}$	$1.31 \times 10^{21} \text{Ds}^{-1} \text{ (221 s)}$
H-mode Type I	$7.17 \times 10^{23} \text{ D (2.4 g)}$	$6.266 \times 10^{23} \text{ D (2.09 g)}$	$2.83 \times 10^{21} \text{Ds}^{-1} \text{ (32 s)}$

Table I: Total number of particles injected, recovered from cryopump regeneration and long term retention, averaged over the heating phase, for the three series of experiments in L mode, Type III and Type I ELMy H-mode.

III – Particle flux

In this analysis, the short term retention (dynamic retention) is supposed to be fully recovered from the outgassing flux occurring between pulses [2]. The particle injection (gas and NBI) is calibrated whilst the sum of the ‘‘Pumped flux’’ during the pulse and of the ‘‘Short term retention’’ (supposed to be fully recovered by outgassing in flux between pulses) corresponds to the amount of particles recovered from the cryopump regeneration. It is therefore possible to separate the contributions of the long term and short term retention in the equation of the particle fluxes

$$\text{Injection} = \text{Long Term Retention} + \text{Short Term Retention} + \text{Pumped flux} \quad (1)$$

In this equation, the pumped flux is measured by pressure gauges. Figure 1 shows the particle fluxes for a typical pulse of the L mode series. At 15 sec, the overall retention is $6.5 \times 10^{21} \text{Ds}^{-1}$ and results from the sum of the long term retention $1.74 \times 10^{21} \text{Ds}^{-1}$ (see table I) and of the dynamic retention $\sim 4.76 \times 10^{21} \text{Ds}^{-1}$. Ten second later, at 25 sec, the total retention has decreased to $4.65 \times 10^{21} \text{Ds}^{-1}$ due to the drop of the dynamic retention to $\sim 2.91 \times 10^{21} \text{Ds}^{-1}$.

In these series of pulse the dynamic retention drops as a function of time (by $\sim 50\%$ in 10 sec)

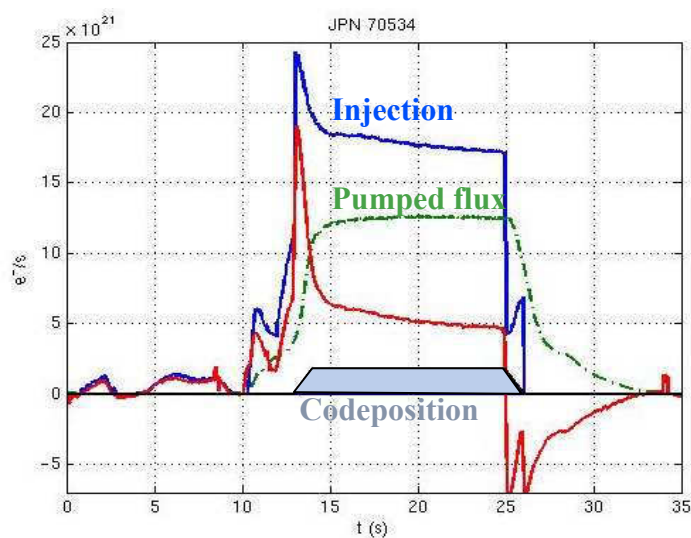


Figure 1: Particle fluxes for a typical pulse of the L mode series. The grey area represents the long term retention averaged over the heating phase. The difference between the red plot and the top of the grey area represents the dynamic retention.

beginning of the heating (13MW of total input power and ELM energy ~ 150 kJ), the short and long term retention are close, respectively ~ 45 and 55% . However, the drop of the dynamic retention occurs very quickly compared to L-mode (and type III), and after 6 sec the

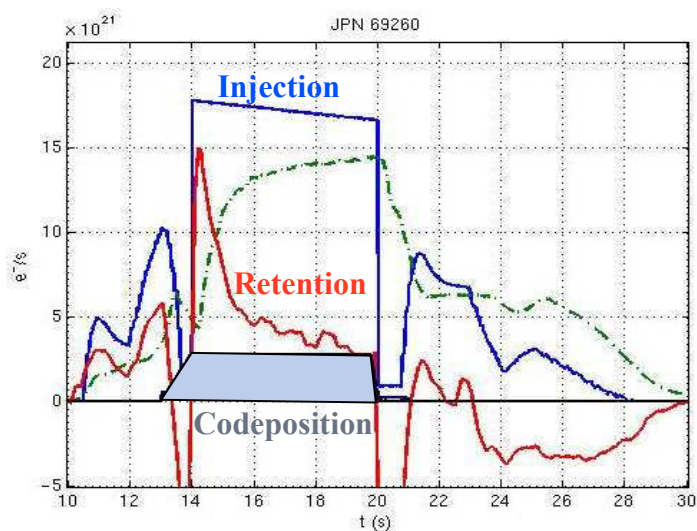


Figure 2: Particle fluxes for a typical pulse of the Type I ELMy H-mode series. The long term retention dominates the retention after 6 sec.

three scenarios, the long term retention exhibits a strong increase with the gas injection, the recycling flux and the ELM energy. This increase of the long term retention is consistent with the enhanced carbon transport within the SOL resulting from the higher erosion of the carbon of the plasma facing components with the recycling flux and the ELM energy. This is

sec) for all the discharges. The same behaviour is observed for the type III ELMy H-mode, where the long term retention rate is $1.31 \times 10^{21} \text{Ds}^{-1}$. Compared to L mode, this long term retention is lower by $\sim 25\%$ but the gas injection is also lower by a factor of 3. This suggests that the retention depends both on the gas injection rate and on the plasma scenario (ELMs). This is supported by the results of the Type I ELMy H-mode as shown in figure 2, displaying the typical particle fluxes for these discharges. At 16sec, 2 sec after the

retention is totally dominated by the long term retention. The D_α signals show that the recycling flux in the inner leg and horizontal region are higher by a factor of 6 and 2 respectively when moving from L-mode to Type I ELMy H-mode. This strong increase of the recycling flux may explain the faster saturation of the dynamic retention for the Type I ELMs. For the Type III ELMy H-mode, the D_α signals are of the same order as for the L-mode. In these

supported by the exponential increase of the carbon deposition observed in the inner divertor region with increasing ELM energy from thermal decomposition of co-deposited layers [3].

Finally, this series of experiments also confirms [2] that within a factor of two to three, the number of particles is always in the range $\sim 1-3 \times 10^{22} D$. This fraction of particles recovered after the pulse is always larger than the plasma content (typical JET plasmas $\sim 0.5 \times 10^{22} D$), but it appears to be nearly independent of the type of discharge (L or H modes), the energy of the ELMs, the quantity of particles injected and the history of the retention.

IV – Summary

The fuel retention has been studied out in JET in L mode, Type III and Type I ELMy H-modes using gas balance in series of repetitive pulses with an overall accuracy of about 1.2%. The short term (dynamic) retention is important for both L mode and Type III ELMy H-mode over the heating phases (respectively 13 and 17 sec) but decreases already significantly during the pulse. It becomes small already after 6 sec for the Type I ELMy H-mode conditions. In all the cases, the recovery after the pulse contributes for a weak part in the gas balance and in the overall fuel retention. The absolute long term fuel retention (on the time basis of typically 5 hours) for the different plasma conditions is between 1.3 and 2.8 $10^{21} Ds^{-1}$ (averaged over the plasma heating time) and in reasonable agreement with the value deduced from post mortem tile analysis of about 5 $10^{20} Ds^{-1}$ considering the additional long term outgassing, conditioning and disruptions included in the post mortem analysis. The increase of the long term retention observed from L mode to Type I ELMy H-mode is associated to the increase of the recycling flux and the ELM energy. This larger long term retention is attributed to an enhanced carbon erosion and transport in the SOL leading to stronger carbon deposition and fuel codeposition. The results confirm the strong concerns about fuel retention in a carbon clad tokamak and a possible full carbon wall ITER which could reach the T-inventory limit in only a small number of high performance shots. A reasonable ITER operation time depends thus on a significant reduced T codeposition under the different ITER material conditions (which has to be confirmed in a relevant tokamak experiment such as the JET ILW project) and an effective routine T removal technique.

References

- [1] G Matthews, P Edwards, T Hirai et al., Phys. Scrip. 75 (2007) 137-144.
- [2] T Loarer, C Brosset, J Bucalossi et al., Fusion Energy Conference 2006, Proc. 21st Int. Conf. Chengdu, 2006, Vienna: IAEA, CD-ROM file [EX/3-6].
- [3] A Kreter, G Esser, private communication.