

Sol-gel surface coating of cathode materials for lithium ion batteries

M. Wolff⁽¹⁾, S. Lobe⁽¹⁾, D. Sebold⁽¹⁾, S. Uhlenbruck⁽¹⁾, D. Fattakhova-Rohlfing^(1,2) and O. Guillon^(1,3)

¹ Forschungszentrum Jülich GmbH, Institute of Energy and Climate Research (IEK-1), Wilhelm-Johnen-Straße, 52428 Jülich, Germany

² Universität Duisburg-Essen (UDE), Fakultät für Ingenieurwissenschaften, Forsthausweg 2, 47057 Duisburg, Germany





³ Rheinisch-Westfälische Technische Hochschule (RWTH) Aachen, Institut für Gesteinshüttenkunde, Mauerstr. 5, 52064 Aachen, Germany

Motivation

Lithium ion batteries play an important role in the field of electromobility and stationary energy storage. Unfortunately, major issues with respect to cathode degradation arise due to metal ion dissolution, cation disorder or phase transitions. The sol-gel method is a useful and widely used strategy to apply functional cathode coatings to prevent these unwanted side reactions and reduce heat generation during cycling resulting in an improved electrochemical performance.

Different sol-gel coatings on planar model electrodes are evaluated with regard to material compatibility and electrochemical performance. To ensure optimal coating conditions, surface pretreatment and wettability, precursor selection, dip/spin coating process as well as heat treatment parameters are equally taken into account. In consideration of economic aspects, suitable coating materials are transferred to commercial cathode materials in powder form.

Planar substrates

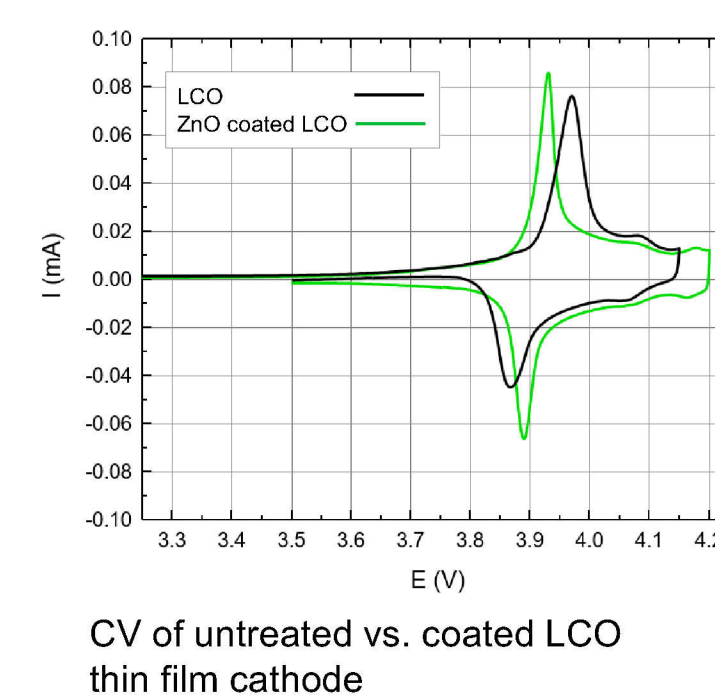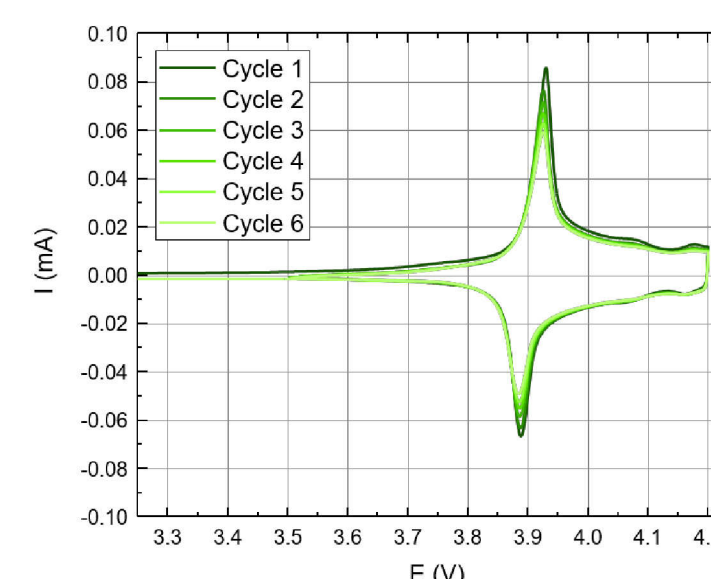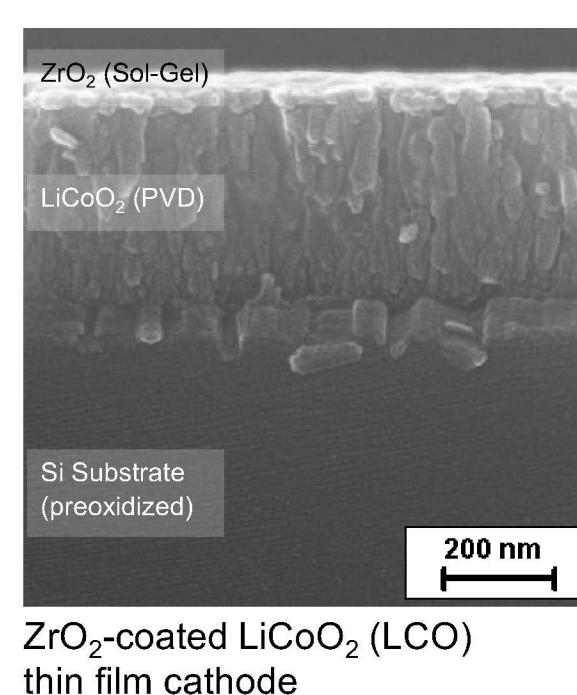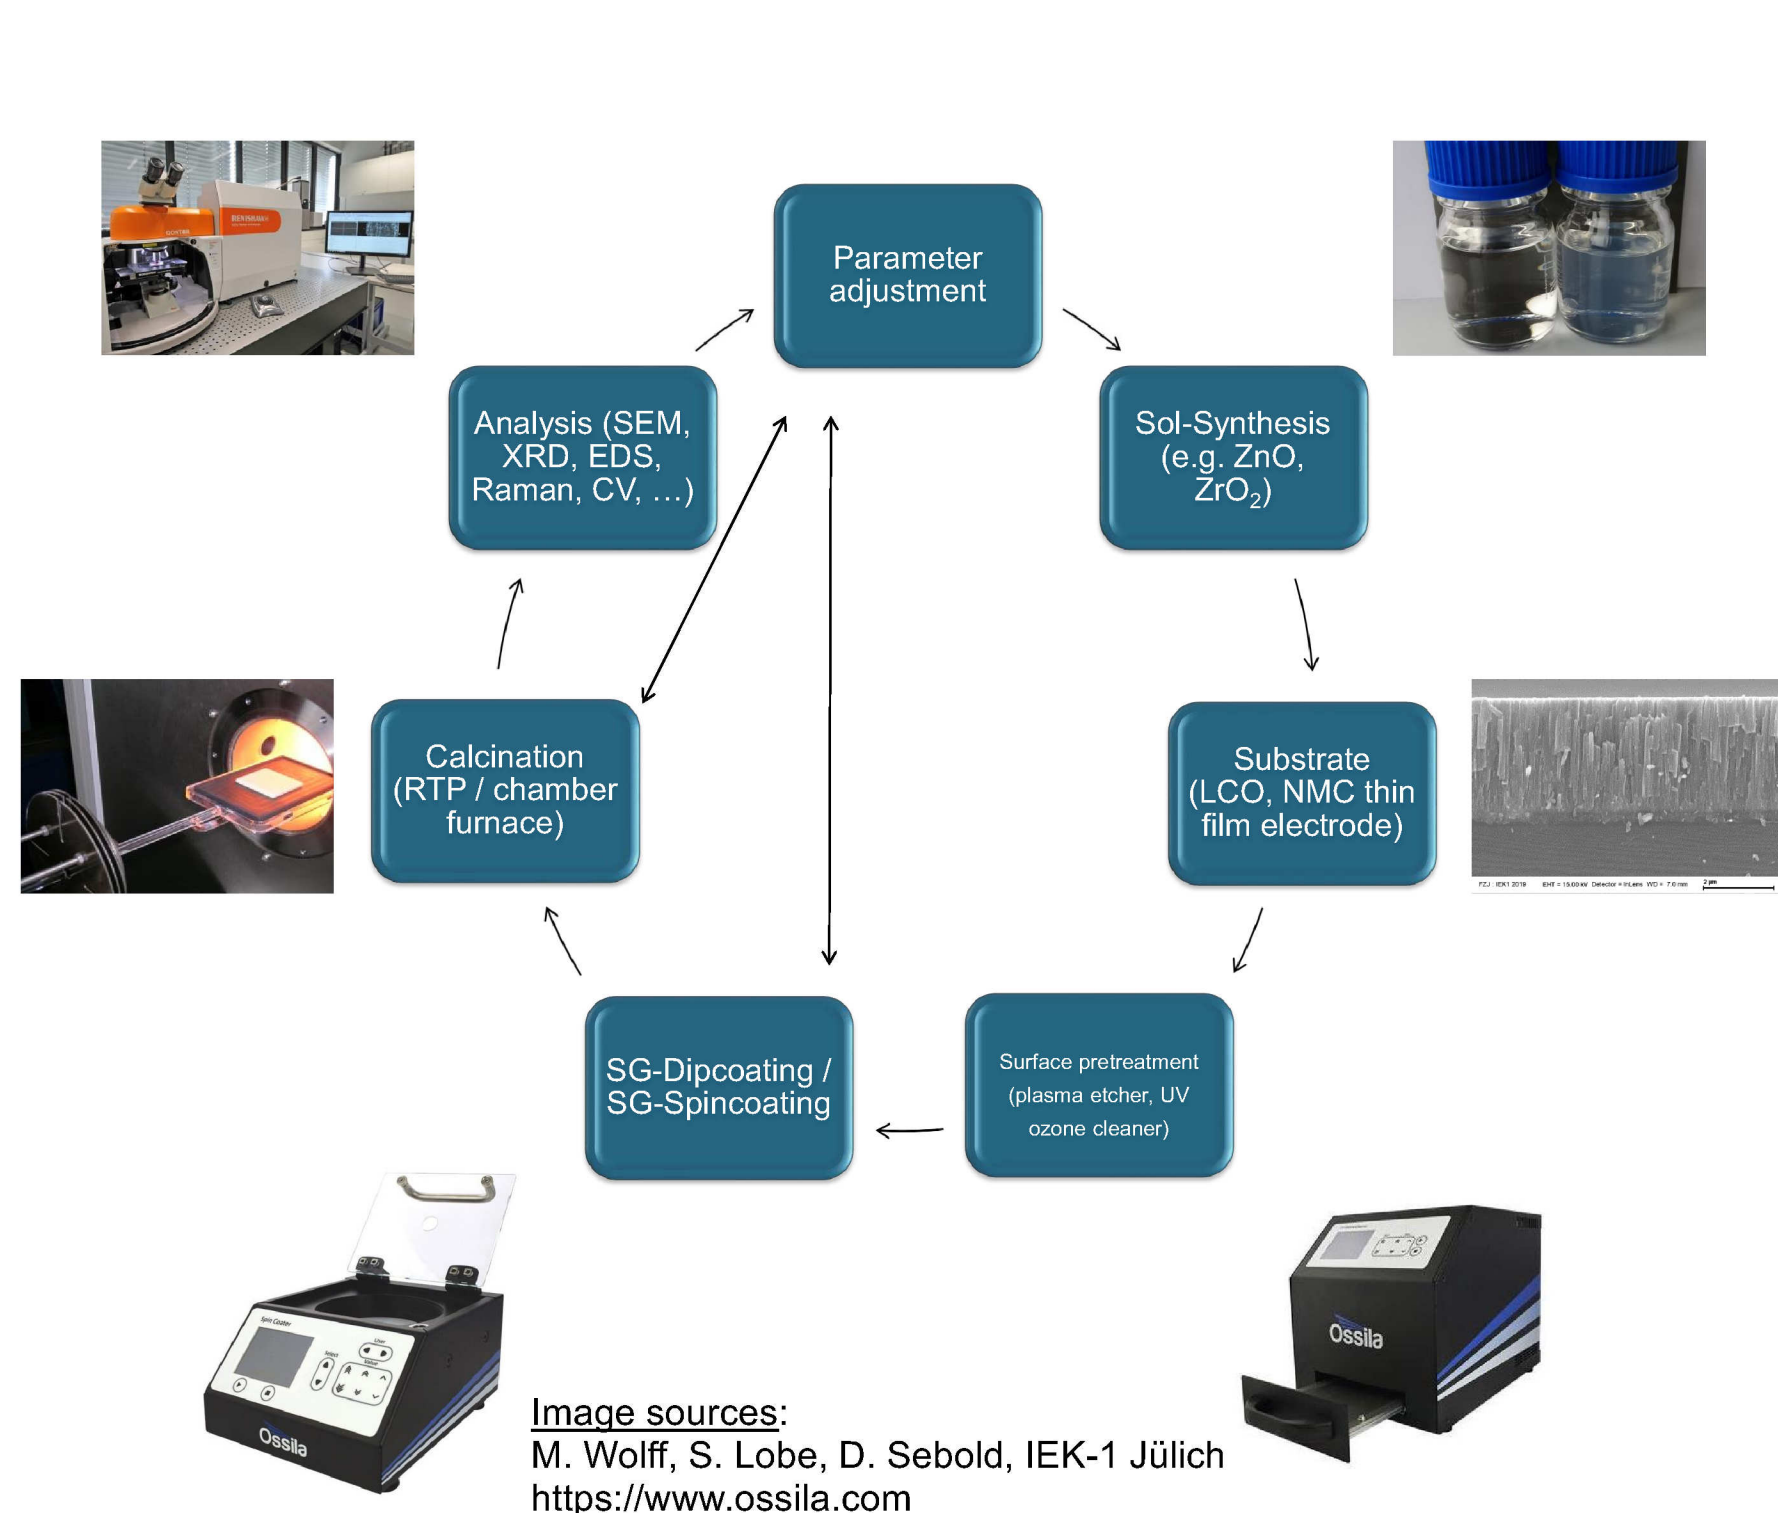

Aim:

Ultra-thin ($d < 50$ nm) metal oxide coatings (e.g. ZrO₂, ZnO) on thin-film cathodes (e.g. LiCoO₂ (LCO), LiNi_{0.6}Mn_{0.2}Co_{0.2}O₂ (NMC622))

Methods:

Dip-Coating, Spin-Coating (Cleanroom, ISO 5)

Substrate:

sputter deposited LiCoO₂ on Si(100)


Sols:

Metal precursors (e.g. Zn(OAc)₂) in non-aqueous solvents (e.g. EtOH, PrOH) with different sol stabilizers

Results:



ZnO coated LCO thin-film cathodes show improved cycleability compared to untreated cathodes

Powders

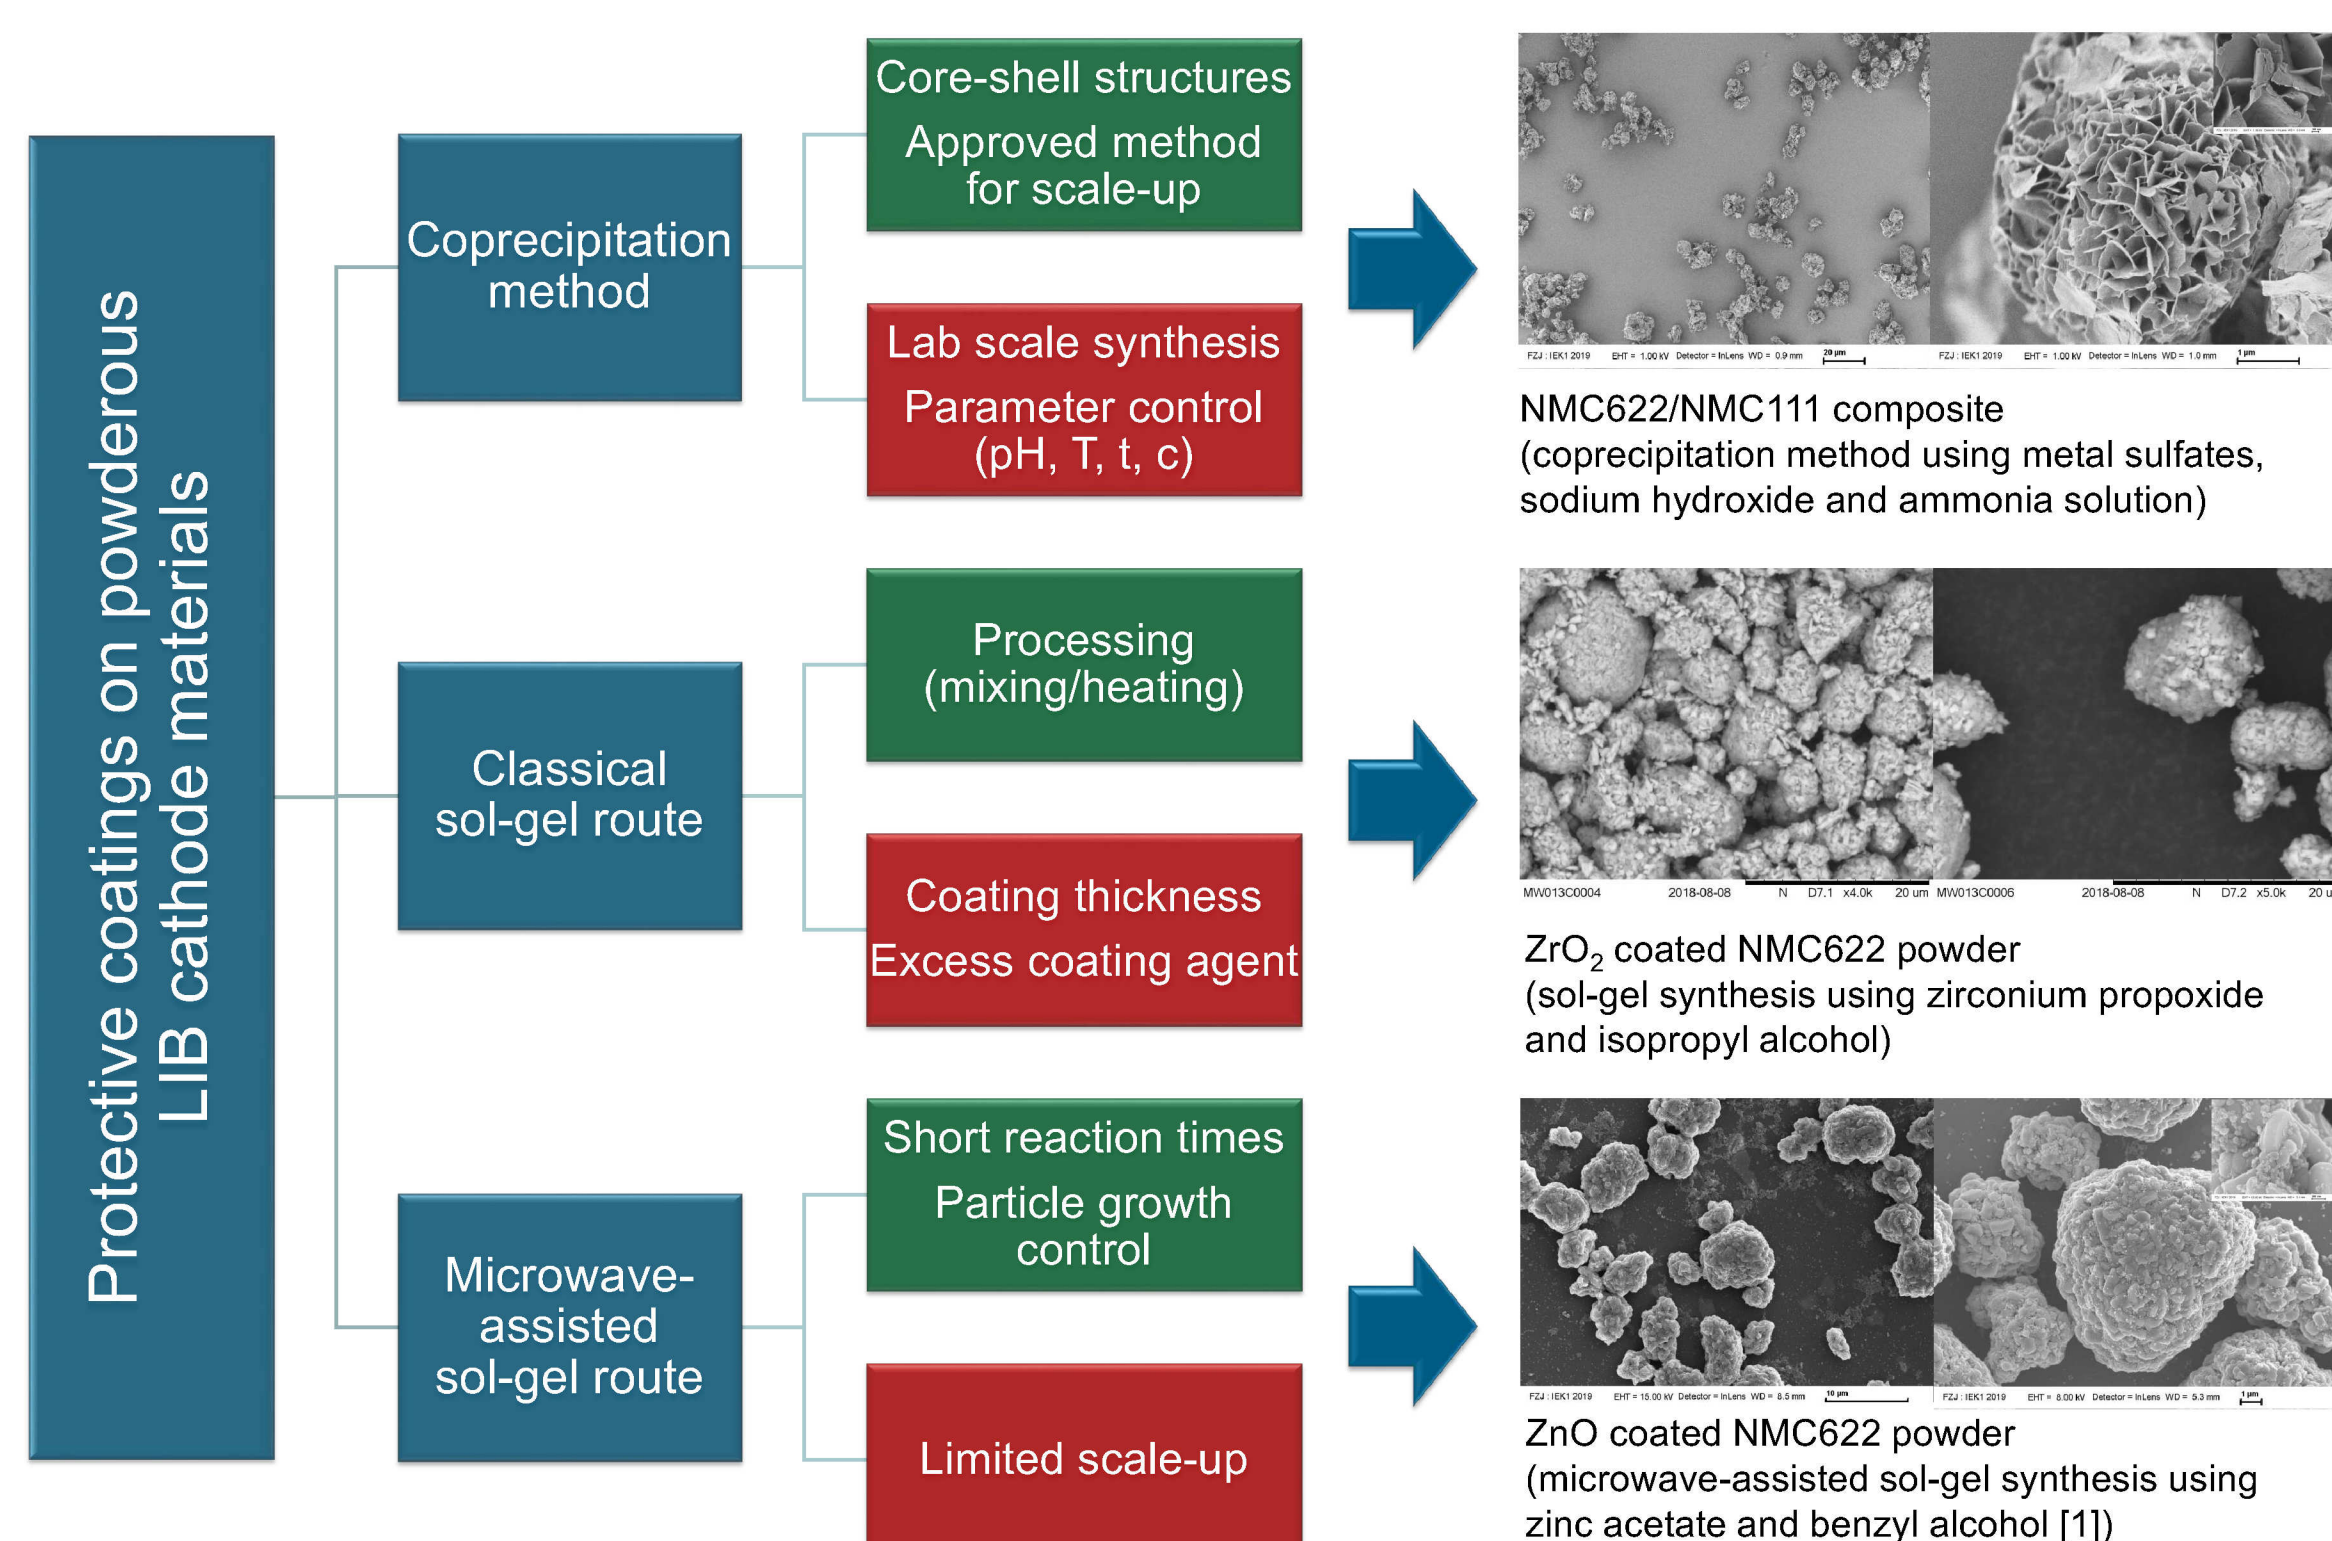

Aim: NMC (LiNi_xMn_yCo_zO₂, $x+y+z=1$) Core-Shell structures with Ni-rich core and Ni-poor shell

Results: composite NMC622/NM111 microspheres composed of aggregated nanoplatelets

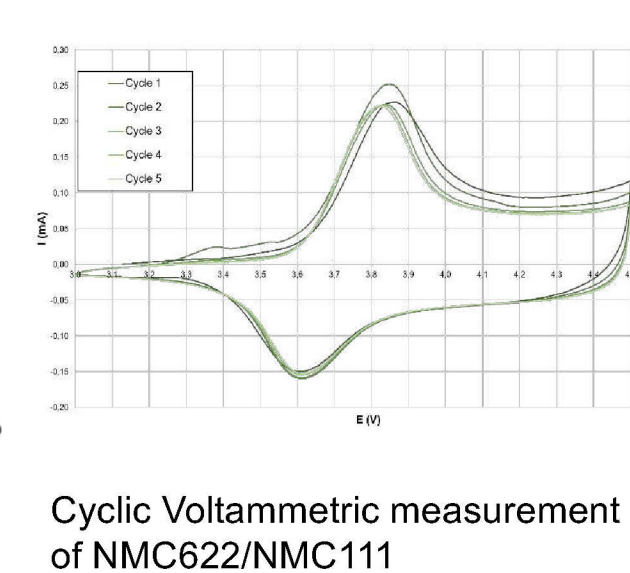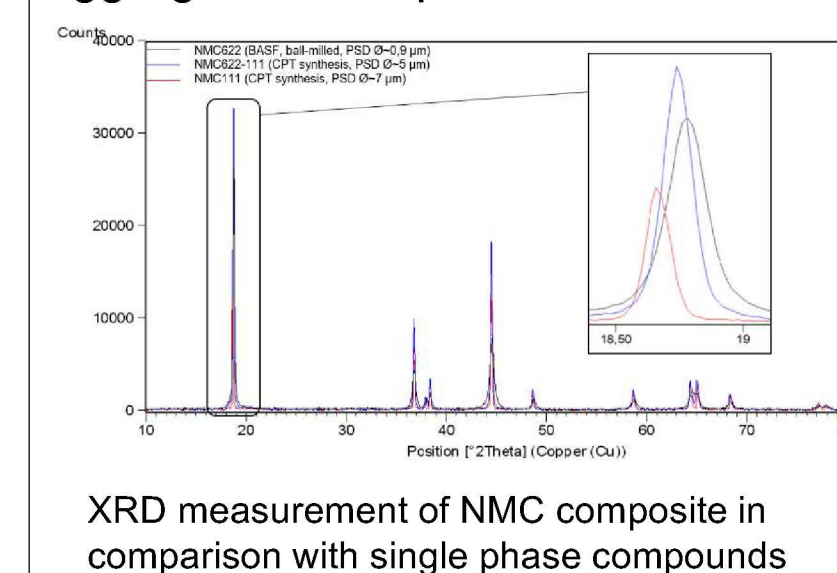

Planned measures: surface modification with ZrO₂ and ZnO, doping with Zr and Zn; TEM measurements

Aim: Ultra-thin coatings of ZnO on commercial cathode materials through a one-pot synthesis in a laboratory microwave

Results: partial coating of NMC622 cathode powder with nanoscaled ZnO particles

Planned measures: electrochemical testing, improvement of particle surface coverage

Conclusion

Sol-gel derived ZnO and ZrO₂ coatings have been identified as suitable coating material for planar thin-film LiCoO₂ cathodes. CV measurements confirm an improved performance compared to uncoated cathodes. Aiming for a transfer of results to powdrous cathode materials, different wet-chemical process strategies have been evaluated, whereas syntheses via coprecipitation method and microwave-assisted sol-gel route show the most promising results so far.