

Journal Name

ARTICLE TYPE

Cite this: DOI: 00.0000/xxxxxxxxxx

Microfluidic flow-through reactor and 3D Raman imaging for in situ assessment of mineral reactivity in porous and fractured porous media[†]

Jenna Poonoosamy,^{*a} Cyprien Soulaire,^b Alina Burmeister,^c Guido Deissmann,^a Dirk Bosbach^a and Sophie Roman^b

Received Date
Accepted Date

DOI: 00.0000/xxxxxxxxxx

An in-depth understanding of dissolution and precipitation of minerals in porous and fractured porous media and the complex feedback on the transport of fluids is essential for various subsurface applications. In this context, we developed a novel non-destructive “lab-on-chip” approach for quantitative in-situ assessments of mineralogical changes in porous media. Our experimental approach involves a microfluidic flow-through reactor of reactive homogeneous and heterogeneous (fractured) porous media coupled with high-resolution imaging. Here, the reactive medium consists of compacted celestine grains seeded in a reservoir within the microfluidic chip. This medium reacts with a barium chloride solution injected into the microreactor at a constant flow rate, leading to the dissolution of celestine and epitaxial growth of barite. Various seeding processes of the mineral grains allow the creation of homogeneous reactive porous media or the introduction of large heterogeneities such as fractures. Hence, our approach enables high-resolution investigations of reactive transport in fractured porous media. The use of confocal Raman spectroscopic techniques enables the spatio-temporal visualization of the mineral transformation at the pore-scale in two- and three-dimensions. Moreover, advanced pore-scale modelling correlates the hydrological heterogeneities to the geochemical observations in the micro-reactor, which explains the observed discrepancies between homogeneous and heterogeneous reactive media. Eventually, the proposed methodology can be applied to other chemical systems to provide new insights into hydro-geochemical coupling in porous and fractured porous media as well as high-fidelity datasets to benchmark reactive transport codes that are currently under development.

Introduction

Reactive transport modelling^{1,2}, is a versatile tool in predicting or assessing mineralogical changes due to reactive fluids in space and time for various subsurface applications including shale gas production using hydraulic fracturing (“fracking”), CO₂ sequestration, geothermal energy extraction, the underground repositories for nuclear waste, or environmental remediation^{3,4}. Because of its widespread applications, recent studies have been dedicated to test the underlying concepts of these numerical models

using experimental benchmarks^{5–9}. Discrepancies between numerical models and experimental observations were noted and mainly explained by the fact that reactive transport operates at the continuum-scale (averaged properties of the porous media, e.g. porosity, permeability, effective surface area) and considers upscaled parameters^{10,11}, while pore-scale features (e.g. surface roughness of minerals¹²) influence the macroscopic behaviour (e.g. transport properties) of the system. These experiments suggest the need to understand the processes occurring at the pore-scale and to develop process-based predictive models and mathematical relationships that account for small-scale heterogeneities¹³.

In the last decades, there has been a growing interest to use pore-scale modelling in combination with experimental imaging/characterisation of porous media as tools to get a better understanding of coupled chemical and transport processes and to upscale the results to a macroscopic representation^{2,14–17}. A live

^a Address, Institute of Energy and Climate Research (IEK-6): Nuclear Waste Management and Reactor Safety, Forschungszentrum Jülich GmbH, 52425 Jülich, Germany. Tel: +49 2461 61-6468; E-mail: j.poonoosamy@fz-juelich.de

^b Earth Sciences Institute of Orléans, Univ. Orléans, CNRS, BRGM, Orléans, France

^c Institute of Bio- and Geosciences (IBG-1): Biotechnology, Forschungszentrum Jülich GmbH, 52425 Jülich, Germany.

[†] Electronic Supplementary Information (ESI) available: [details of any supplementary information available should be included here]. See DOI: 00.0000/00000000.

monitoring of chemical processes and hydraulic pathways can be performed using non invasive techniques such as magnetic resonance imaging¹⁸, positron emission tomography¹⁹, or neutron imaging²⁰. The spatial resolution, however, is often a limiting factor for these techniques. Alternatively, high resolution experimental images can be used. For example, Prasianakis *et al.*²¹ investigated the effect of pore size distribution on the nucleation of sulphates in porous media using scanning electron microscopy (SEM) images of the reacted porous media. Noiriél *et al.*²² and Molins *et al.*²³ combined pore-scale modelling with X-ray microtomography imaging to assess calcite dissolution. These imaging techniques may nevertheless require specific facilities (e.g. Synchrotron) or can also be destructive without providing any information on the pore architecture or the spatial distribution of minerals of the original porous micro-structure (e.g. post-experimental characterization using SEM).

Another option that allows a direct visualization of flows, reactions and transport mechanisms at the pore-scale involves microfluidic devices coupled with optical microscopy techniques. Micromodels are two-dimensional representations of a porous medium in which the pore space is etched on a substrate by photolithography methods and then covered by a transparent material. The etched pattern may be of variable complexity ranging from single micro-channels of different shapes to patterns representative of natural porous media obtained from imaging of real rocks²⁴. For now, microfluidic platforms are mainly based on glass, silicon or PDMS (a silicone elastomer) materials. However, transport and reaction dynamics depend also on rock surface chemistry. Recently, micromodels that include reacting minerals have emerged. They enable direct visualization of the fundamental fluid-mineral interactions at the pore-scale. For example, Song *et al.*²⁵ etched flow channels in a natural calcite crystal substrate that was bonded to a glass plate to investigate carbonate dissolution by an acidic brine. Soullaine *et al.*¹⁵ investigated the complex feedback between hydrodynamics and surface chemistry using a single calcite crystal posted in a microchannel. Singh *et al.*²⁶ developed a real-rock/PDMS combined micromodel allowing them to investigate transport properties and multiphase flow in real-time.

In this paper we propose a new kind of micromodels based on a flow-through setup. It consists of a microfluidic reservoir filled with reacting crystals of controlled grain size and mineralogy with a reacting fluid flowing through it. The reservoir can contain either a homogeneous or a heterogeneous (fractured) porous medium. Our monitoring techniques include optical microscopy and Raman spectroscopy and allow in situ and real-time monitoring of details on the chemical composition of the system at the grain-scale. The aim of this study is to assess the use of a new generation of microfluidic flow-through reactors in understanding mineral reactivity in porous and fractured porous media.


Materials and methods

In this section we describe our experimental setup and the measurement techniques that we developed to investigate mineral reactivity during micromodel experiments.

Experimental concept

The experimental setup consists of a micro-reactor connected to a pump and monitored by optical microscopy (Fig. 1). We chose a well-controlled chemical system¹³, which is neither pH nor redox sensitive. The reactor includes a 'crystal reservoir' filled with celestine (SrSO₄) crystals. A barium chloride (BaCl₂) solution is injected in the reactor through the inlet at a constant flow rate. The injection of the BaCl₂ solution triggers the dissolution of celestine and subsequently barite (BaSO₄) precipitation due to the difference in their solubility products ($K_{sp}BaSO_4 = 10^{-9.97} \text{ mol}^2\text{L}^{-2}$ and $K_{sp}SrSO_4 = 10^{-6.63} \text{ mol}^2\text{L}^{-2}$ at 298.15 K and 1013 hPa, from Hummel *et al.*²⁷).

The chemical reaction writes as follows,



Micromodel

The microfluidic reactor consists of a reservoir of 900 μm length and 800 μm width in which the reactive crystals are injected. The reservoir is placed in between two sections (upstream and downstream, see Fig. 1) that constitute an artificial pore architecture made of cylindrical pillars of 100 μm diameter and pore throats of 1 μm. The pore throat of 1 μm enables the confinement of the crystals in the reservoir during the seeding process (see next section). Moreover, the upstream section (in the absence of heterogeneities in the distribution of crystals in the reservoir) enables an uniform flow of the solution as it reaches the reactive zone and the downstream section prevents that precipitates plug the outlet. The upstream and downstream sections are connected to the inlet and outlet respectively via channels of 2600 μm length and 100 μm width. The reservoir is connected to a crystal injection channel of 1900 μm length and 300 μm width. The depth of the microfluidic device is 10 μm. The silicon wafer, produced by photolithography²⁸, contains the positive relief of the micromodel and is used as a mold in the PDMS (Polydimethylsiloxane), Silicone Elastomer, Sylgrad) molding process. A cast of the micromodel is obtained by pouring transparent liquid PDMS onto the mold, baking it (1 h, 65 °C), and removing it from the wafer. Holes for the fluids interconnections are manually punched in the PDMS. Before bonding to the glass plate, the PDMS layer is cleaned with isopropanol, dried under nitrogen flow and treated with adhesive tape²⁹. An oxygen plasma treatment is applied to the PDMS and glass layers in order to activate their surface. Then, they are assembled and heated for 5 minutes at 80 °C until they are securely bonded.

Celestine seeding process

The celestine crystals used in the experiments are obtained from naturally occurring celestine SrSO₄ stones of 99.7% purity⁷. The stones were crushed and sieved to collect crystals of < 20 μm grain size. This fraction of crystals was further segregated and crystals of grain size between 4 μm and 9 μm were isolated using sedimentation techniques (in isopropanol) in an Atterberg cylinder³⁰. The celestine crystals were mixed in a saturated solution of strontium sulphate (SrSO₄) to constitute a seeding suspension. Prior to the

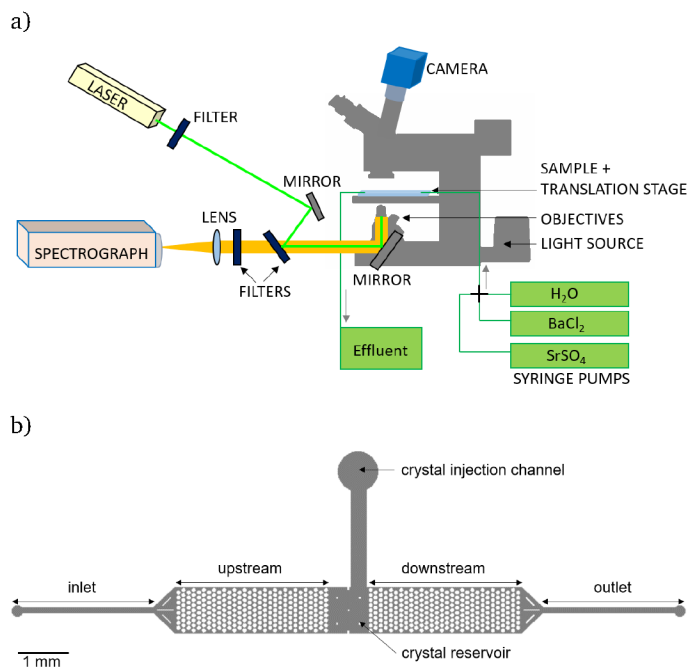


Fig. 1 a) Schematic of the experimental setup b) geometry of the micro-model, inlet and outlet channels are 0.10 mm wide and 2.50 mm long, upstream and downstream porous media are 0.90 mm wide and 3 mm long, the crystal reservoir is 0.90 mm wide and 0.80 mm long, the crystal injection channel is 0.2 mm wide and 1.9 mm long, the depth is 10 μm everywhere.

injection of the seeding suspension, the microfluidic device was flushed with water to prevent gas bubbles being trapped in the system. The injection of the crystals using this technique can be used to generate a homogeneous compacted porous medium in the reservoir (Fig. 2a). By alternating the injection of the seeding suspension and the injection of a SrSO₄ solution through the inlet, a heterogeneous (fractured) compacted porous medium can be obtained (Fig. 2b). The injection channel was mechanically closed using a stopper (Microfluidic luer lock stopper from Darwin Microfluidics, Delauney, France). A saturated SrSO₄ solution was then injected at a constant flow rate of 1000 nL min⁻¹ for 3 hours to stabilize the crystals in the reservoir, and later at 500 nL min⁻¹ for 21 hours to ensure a steady-state condition, using a syringe pump (NeMeSYS, Cetoni GmbH, Germany). This step ensures that the crystals were well stabilized and less prone to colloidal movements in the reservoir. Two experiments were conducted, involving a homogeneous and a heterogeneous compacted porous medium, labelled A and B, respectively.

Fluidics

The inlet was connected to three dispensing syringes (water, a saturated solution of SrSO₄ and a 1 mM BaCl₂ solution) using a cross peek connector (052P-722, CS Chromatographie Service GmbH, Langerwehe, Germany) and the outlet was linked to an effluent vessel. The micromodel was initially saturated with SrSO₄ solution (see previous section). Then, water was injected at 500 nL min⁻¹ for 30 minutes to prevent precipitation of barite in the upstream section. Finally, BaCl₂ solution was injected into the

microfluidic device at 500 nL min⁻¹ for 60 hours.

Imaging and Raman spectroscopy

The microfluidic experiment was observed using an automated inverted microscope (Witec alpha300 Ri Inverted Confocal Raman Microscope which consists of an inverted Nikon Ti-2 U as base microscope) with 100 \times oil immersion objective of numerical aperture (NA) 1.25, working distance 0.23 mm and cover glass correction for 0.17 mm from Nikon. The instrument is equipped with a Nd:YAG laser ($\lambda = 532\text{nm}$), and a thermoelectrically cooled CCD Camera and Ultra-High-Throughput Spectrometer UHTS300. The lateral and axial (depth) resolution of Raman measurements with the focus at the sample surface is usually estimated from the theoretical diffraction limit given by $d_l \approx \frac{1.22\lambda}{NA}$ and $d_a \approx \frac{4\lambda}{NA^2}$, yielding 520 nm and 1362 nm, respectively.

Before the reaction, high resolution optical images of the compacted porous medium or the fractured medium were taken and the images were stitched for visualization of the porous media structure (see fig. 2 a and b). In each experiment, two regions of interest (e.g. compacted regions or regions along a fracture) were selected and the mineralogical changes were monitored at regular time intervals using Raman spectroscopy, see fig. 2 c and d.

In situ hyperspectral Raman images were recorded from an area of 60 $\mu\text{m} \times 50 \mu\text{m}$ with a 260 nm step size (232 pixel \times 192 pixel per image) in x and y direction. The individual Raman spectra were collected during continuous x-y stage movement. Raman intensities were recorded for 0.1 s in the wavenumber range from 300 to 1300 cm⁻¹. During the Raman measurements, the adjustable laser power was set to 50 mW and the grating to 1800 grooves min⁻¹ with a 500 nm entrance slit. The total exposure time was 1 hour and 43 minutes for a single image. The selected map area was a good compromise of the representative elementary volume ($< 1\%$ pore volume exchange) and acquisition time. At the end of the experiment, the mineral mappings of the reservoir and a depth scan along a 100 μm line in the upstream region were carried out to visualize the minerals distribution in the cell. The step size were 2000 nm (475 pixel \times 475 pixel per image) in x and y direction, and 3840 nm step size in x and 384 nm in z direction (384 pixel \times 42 pixel per image), respectively. In addition, stacked Raman images were collected 25 $\mu\text{m} \times 50 \mu\text{m}$ with a 260 nm step size (96 pixel \times 192 pixel per image) in x and y direction and over a depth of 13 μm with a 1000 nm step size. These images were used to reconstruct the 3D geometry of the porous media skeleton.

Raman image stacks were visualized with Volume Viewer, an ImageJ plugin developed by Kai Uwe Barthel Internationale Medieninformatik, HTW Berlin (Germany), that shows stacks as slices, projections, or volumes within a 3D-space. We also used ImageJ 3D Viewer plugin³¹. An image processing workflow was developed using ImageJ to measure the porosity and volume fraction of each mineral from the stacks. For that, each mineral phase was converted to grayscale levels and segmented.

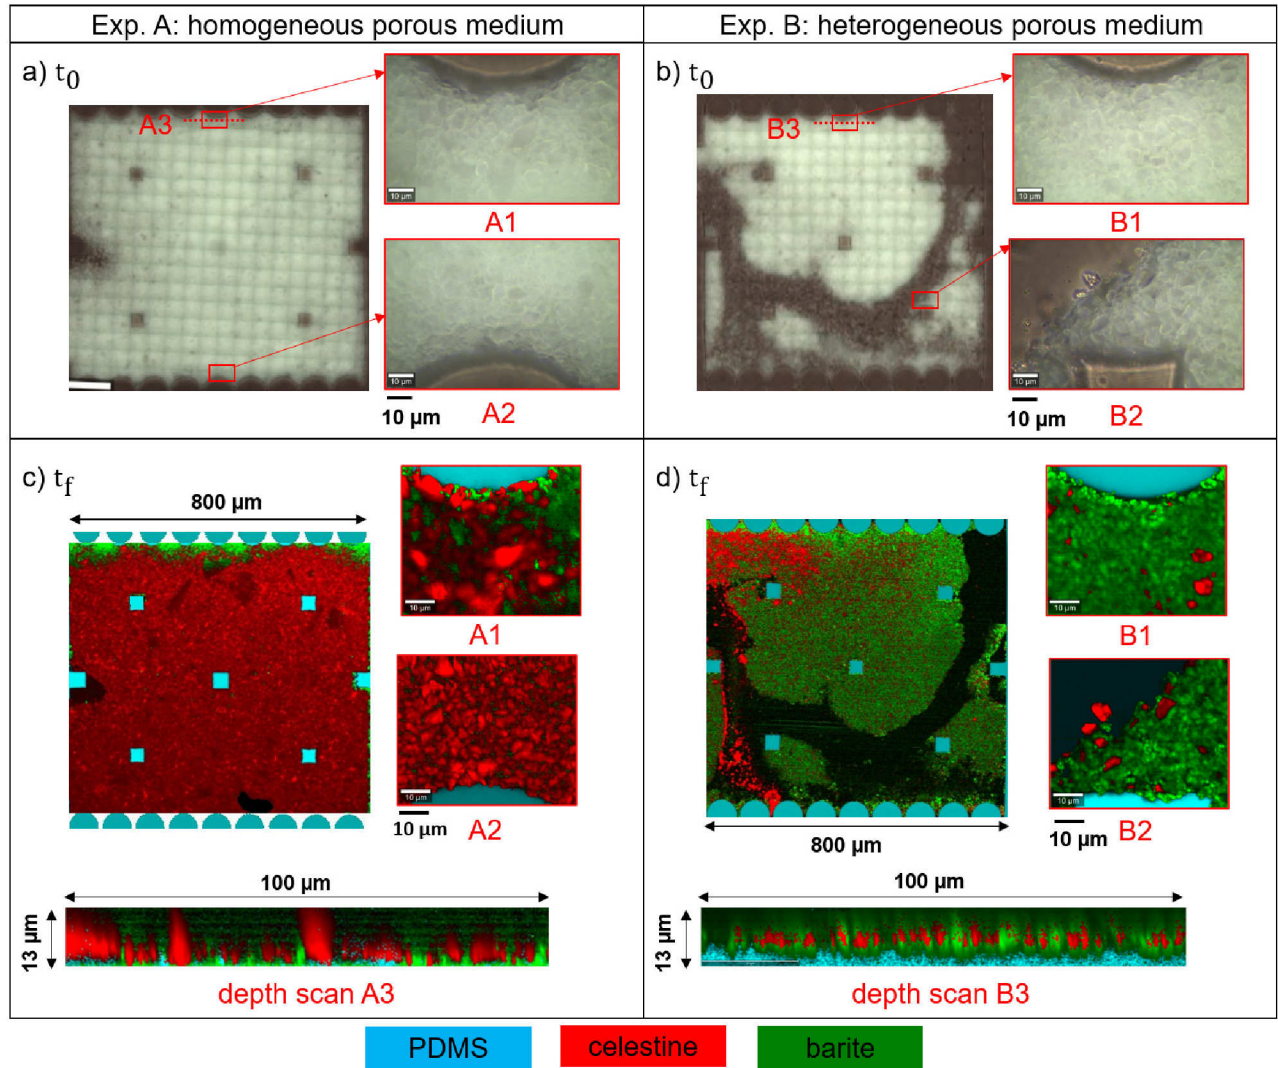


Fig. 2 a) Optical image of the reservoir filled with crystals constituting a homogeneous porous medium (experiment A) with a zoom on the monitored areas A1 and A2, b) optical image of the reservoir filled with crystals constituting a heterogeneous (fracture occupying 30% of the domain) porous medium (experiment B), with a zoom on the monitored areas B1, B2, and depth scan areas A1, A2 and depth scan A3 after 60 hours, d) Raman imaging of experiment B with a zoom on the monitored areas B1, B2, and depth scan areas B3 after 60 hours. The flow direction is from top to bottom

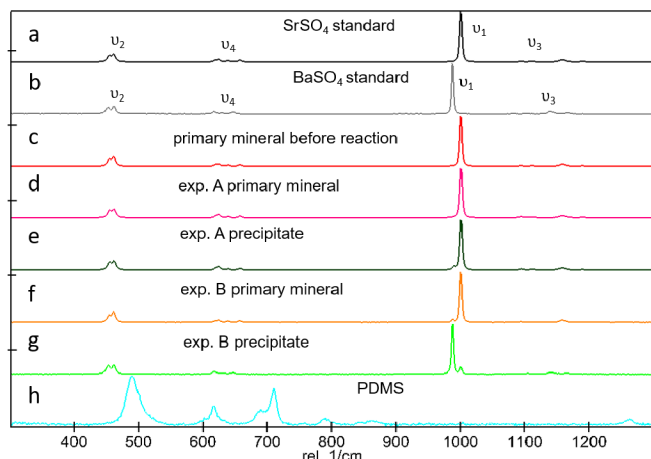


Fig. 3 Average Raman Spectra of a) SrSO_4 , b) BaSO_4 , c) unreacted celestine, d) primary celestine crystals in experiment A, e) newly formed precipitates covering primary undissolved crystals in experiment A, f) undissolved primary minerals in experiment B, g) newly formed precipitate with relics of the undissolved crystals in experiment B h) PDMS

Spectra analysis of the sulphate minerals and PDMS

The Raman spectra of synthetic BaSO_4 (99.99% from Chempur), SrSO_4 (99.99% from Chempur) and the cured PDMS were collected for 0.4 s in the wavenumber range from 200 to 1400cm^{-1} . These measurements served as standards for further evaluation of our experimental data using the True Component Analysis module from Witec Control 5.6 Software. The free sulphate ions SO_4^{2-} have a T_d symmetry and therefore nine modes of vibrations³² represented as $A_1 + E + 2F_2$ with $\nu_1(A_1)$ and $\nu_3(F_2)$ corresponding to the symmetric and the anti-symmetric stretching mode respectively, and $\nu_2(E)$ and $\nu_4(F_2)$ corresponding to the bending vibrations (Figure 3). The line positions depend on the nature of the cations, the temperature and pressure. The Raman spectra of the commercial BaSO_4 and SrSO_4 are shown in Fig.3. Although, the spectra of BaSO_4 and SrSO_4 are rather similar, the very intense peak (ν_1) for barite and celestine are distinct at 990 and 1000cm^{-1} , respectively, and enables their identification. Under the given experimental conditions, barite and celestine can form solid solutions^{33,34} which are usually characterised by a shift of their respective peaks, bringing them closer to each other and a broadening of their width. According to theoretical calculations (see supplemental information in Poonosamy *et al.*¹³), solid solutions can be expected under our experimental conditions. However, the main focus of this study is to test the current setup for assessing the spatial/temporal mineralogical changes of the porous media; therefore solid solution composition is not addressed. The Raman spectrum of PDMS (Fig.3h) is different to that of the sulphate minerals and therefore does not interfere with the identification of the minerals.

Numerical evaluation of velocity fields

Numerical simulations were used to assess the local streamlines and velocity magnitudes in the microfluidic cell. This knowledge allows us to relate the different reaction rates observed in the porous matrix between experiments A and B to the transport

mechanisms in the micromodel. Indeed, even though the fluid and crystal properties, as well as the injection rate, are the same for both cases, the spatial distribution of the crystals in the reservoir can change drastically the distribution of the local flow rates. Because of the large contrast of characteristic length scales between the fracture and the porous matrix formed by the assembly of the celestine crystals, a full Navier-Stokes solution in the entire domain is too computationally demanding and requires the exact knowledge of the three-dimensional structure of the porous regions. Instead, we used the micro-continuum Darcy-Brinkman-Stokes approach developed by Soulaïne and Tchepeli³⁵ for which Stokes equations are solved within the fracture and the flow is described using Darcy's law in the matrix. Optical images of the microfluidic cell such as Fig. 7a are segmented into a solid phase (the white pillars), the void space that includes fractures and the spaces between the solid pillars (light grey) and the porous matrix (dark grey) and directly used to populate the micro-continuum model following the procedure introduced in Soulaïne *et al.*³⁶. The permeability and porosity of the celestine matrix are set to $2 \times 10^{-14}\text{m}^2$ ¹³ and 0.865 (from Raman tomography measurement), respectively. In both cases, we use a constant injection velocity set to $9.25 \times 10^{-4}\text{m/s}$ that corresponds to the mean velocity for the imposed flow rate in the experiments. The simulations are two-dimensional and the effects of the top and bottom plates of the micromodels are modelled adding a Hele-Shaw correction in the flow equations^{24,37}. The micro-continuum model is implemented and solved using OpenFOAM, an open-source computational fluid dynamics platform that uses the finite-volume method to solve partial differential equations.

Results and Discussion

In this section, we evaluate the spatio-temporal mineralogical changes in experiment A and B and use the simulated velocity field to discuss the observed changes.

Mineral distribution in the system

Mineral phases are identified by the characteristic positions and relative intensities of their fundamental Raman bands (Fig. 3). The Raman signature of the celestine before reaction is shown in (Fig. 3c). Fig. 2c and d show the distribution of the remaining celestine (identified in red) and newly formed barite (identified in green) in experiments A and B. The average Raman spectra of the red regions are given in Fig. 3d (experiment A) and Fig. 3f (experiment B), while that of green regions are given in Fig. 3e (experiment A) and Fig. 3g (experiment B).

In experiment A, a $50\mu\text{m}$ wide precipitation front was observed at the upstream side of the reservoir, leaving the majority of celestine undissolved after the reaction time of 60 hours. The precipitation of barite in experiment A, is characterised by a low intensity peak at 990cm^{-1} , as a shoulder to the high intensity celestine ν_1 peak (Fig. 3e). Barite also precipitated sparsely downstream in between the celestine grains (Fig. 2c area A2).

In experiment B, the mineral distribution is heterogeneous (Fig. 2d) with a higher barite content close to the fracture and higher content of celestine in the left side of the reservoir. The

average Raman spectra of the green regions (Fig. 3g) shows the signature of barite but also relics of the undissolved celestine crystals. The undissolved celestine crystals can be easily distinguished in the depth scans, where the Raman signal from celestine is seen. An average of the red regions identified as undissolved celestine shows minor contributions of barite (Fig. 3f) suggesting barite precipitation on its surface. Comparing the depth scan A3 and B3, the chemical reactions upstream (defined by celestine dissolution and consequential barite precipitation) appear more pronounced in experiment B than in experiment A (see further assessment in Fig. 6).

Fig. 4 shows the mineralogical changes in regions B1 and B2 with time. The precipitation of barite starts on the step like features of the crushed celestine crystals (Fig. 4 at 10 hours), this is a common feature observed for barite epitaxial growth on celestine⁷ which is explained by the reduction of enthalpies due to the minimization of interfacial energies³⁸. Barite precipitates on the surface of celestine and in between the celestine grains. From the temporal changes of Area B2, it appears that the reaction occurs in the compacted regions first rather than in regions directly in contact with the fracture, where crystals (see encircled crystal in Fig. 4) dissolve, shrink and become rounder.

3D representation of the porous structure

Fig. 5 shows 3D representations of the porous micro-structure (Area A1 and B1 of experiment A and B, respectively) obtained from the stacked Raman images over a depth of $10\ \mu\text{m}$. The initial porosity was determined at 0.86 for area A1 in experiment A and 0.87 for area B1 for experiment B. After celestine dissolution and barite precipitation, the porosity increases to 0.91 for experiment A and decreases to 0.84 for experiment B. The volume fraction of minerals before and after reaction, measured for the images in Fig. 5, is shown in Fig. 6. The volume fraction of barite after the end of the experiment is 0.0017 and 0.16 in area A2 and B2, respectively, indicating a greater conversion of celestine to barite in experiment B. The replacement of celestine by barite is usually accompanied by a porosity decrease because of the larger molar volume of barite^{7,13}. This decrease in porosity is indeed observed in experiment B, while in experiment A, a porosity increase is observed suggesting a faster dissolution than precipitation during the time of the experiment. The 3D animated representation of the porous skeletons are presented in supplementary materials.

Influence of the hydrodynamic heterogeneity on mineral reactivity

The different barite distributions in experiments A and B are attributed to the difference in velocity fields in the two systems. In experiment A, the velocity field is homogeneous with a mean velocity of $9.25 \times 10^{-4}\ \text{ms}^{-1}$ in the porous reservoir. This velocity is calculated from the injection flow rate and cross sectional area of the micromodel. In experiment B (Fig. 7 and 2c), the velocity field is heterogeneous with the fastest flow path occurring along the fractures at $3.16 \times 10^{-3}\ \text{ms}^{-1}$ and the lowest flow rates observed in the compacted porous regions with an averaged value of $4.90 \times 10^{-5}\ \text{ms}^{-1}$. These results show that, for the same injection

rates, the mean flow velocity through the celestine crystals exhibit orders of magnitude difference depending on whether the crystals are disposed uniformly in the reservoir or if they form a fractured porous medium. Indeed, we calculated that the flow rate through the compacted celestine crystals about a factor of 19 smaller in the heterogeneous case (experiment B) than in the homogeneous case (experiment A). The Peclet numbers (Pe, defined as the ratio of advective and diffusive transport rates) in the compacted regions were calculated at 4.63 and 0.25 considering a characteristic length $5\ \mu\text{m}$ (mean pore size) for experiment A and experiment B, respectively. Therefore, the transport in the porous medium is advection-dominated in experiment A and diffusion-dominated in experiment B. The observed higher volume of barite that precipitated in experiment B (in Area B1) compared to experiment A (in Area A1) can be explained by the lower velocities, lower Peclet number, thus by higher residence time that prevails in experiment B. In contrast to experiment A, where reactions occur mainly in the upstream section, in experiment B, the mineral transformation occurs in regions close to the main flow path (the fracture) with the left side of the reservoir without barite precipitation. In the regions close to the fracture, there is a continuous exchange between the pore solution and the fluid in the fracture, resulting in an increase in celestine dissolution and barite precipitation.

The presence of a fracture also gives rise to local heterogeneity in the chemical reactions. This is emphasized in Fig. 4, where the temporal distribution of the minerals in area B1 and B2 is shown. A higher amount of barite precipitates on the compacted celestine crystals while the crystals along the fractures (Fig. 4 encircled crystal) seem to undergo dissolution. In the compacted regions, the flow velocities are lower increasing the residence time and therefore giving time for the concentration of Ba^{2+} and SO_4^{2-} to increase in the pore solution and barite to precipitate. The constantly renewed solution in the fracture, is undersaturated with respect to strontium sulphate, driving the dissolution of celestine. Besides, due to relatively high velocities along the fracture (short transport time compared to induction time for barite nucleation); it is unlikely that barite nucleates on the surface of celestine directly adjacent to the fracture.

Conclusions

We developed and established a new flow-through microfluidic reactor coupled with high-resolution imaging that enables in situ and non destructive 3D assessment of mineralogical and microstructural changes with full spatio-temporal resolution on the grain scale. The micro-reactor consists of compacted reactive grains seeded in a reservoir within the microfluidic chip. Various degrees of heterogeneities can be considered ranging from uniform distribution of the grains to fractured porous media. In comparison to conventional flow-through experiments, this methodology allows a systematic study of the chemical and porosity evolution of the system at the pore-scale. The presented micronized flow-through reactor monitored by non-invasive imaging Raman spectroscopy is a promising tool in capturing local processes for the interpretation of coupled chemical and transport processes observed at the macro-scale. In particular, our methodology al-

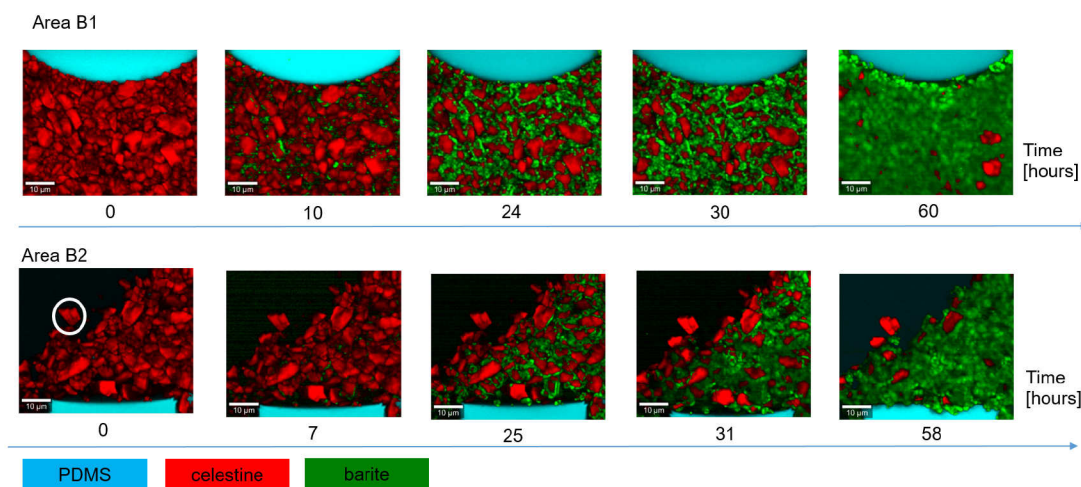


Fig. 4 The temporal evolution of the mineralogical changes of experiment B in area B1, and area B2. The white circle shows a crystal that undergoes dissolution with time

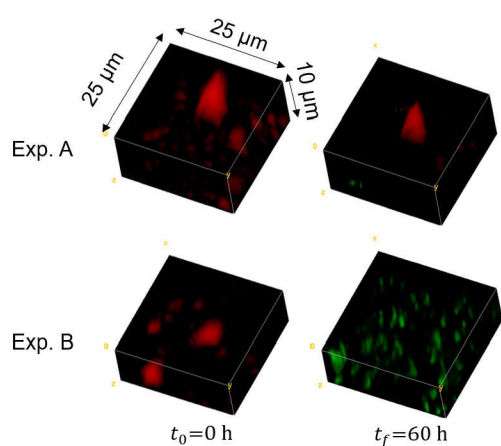


Fig. 5 The temporal evolution of the pore architecture in experiment A and B.

allows the investigation of reactive transport processes in fractured porous media in well-controlled environments. The current setup can be extended to other chemical systems (e.g. calcite dissolution followed by gypsum precipitation) for the assessment of different transport regimes, in terms of Peclet numbers and/or Damköhler numbers, on the mineral precipitation and dissolution mechanisms in porous media.

Our methodological protocol is therefore a versatile tool in support of further developments in reactive transport modelling for assessing mineralogical changes and consequential porosity changes of porous media. Indeed, as reported in a recent review¹⁰, reactive transport models rely on the use of empirical relationships to predict the system evolution in terms of mineralogical changes and transport properties. The heterogeneity in porous media likely controls the mass fluxes and residence time in the reactive media and therefore are known to control the effective rates of mineral dissolution by reducing effective mineral surface areas physically (e.g. in fractures, or at partial saturation) and chemically^{39–42}. Moreover, the reactive surface area of

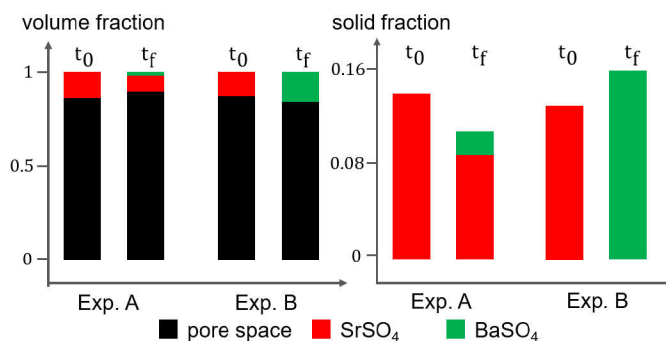


Fig. 6 evolution with time of volume fraction of celestine (red), barite (green) and pore space (black) in experiment A and B, in area A1 and B1 respectively

minerals constituting the porous media is not directly experimentally accessible and is often used as a fitting parameter in reactive transport simulations⁴³. In a future work, the Raman images of the evolving crystals can be used to evaluate the geometry and size of the crystals with time leading to calculation of dissolution rates⁴⁴. Moreover, pore-scale images can be used in pore-scale modelling. In fact, our in-situ 3D Raman reconstruction of the pore architecture along with advanced pore-scale modelling¹⁴ will provide a better assessment of the transport properties (e.g. permeability, dispersion tensor) as well as the accessible reactive surface area and reaction rates for describing mineral precipitation/dissolution in porous media.

Conflicts of interest

There are no conflicts to declare.

Acknowledgements

The research leading to these results has received funding from the German Federal Ministry of Education and Research (BMBF, grant agreement 02NUK053A) and from the Initiative and Networking Fund of the Helmholtz Association (HGF grant SO-093) within the iCross project. This work has received support from the

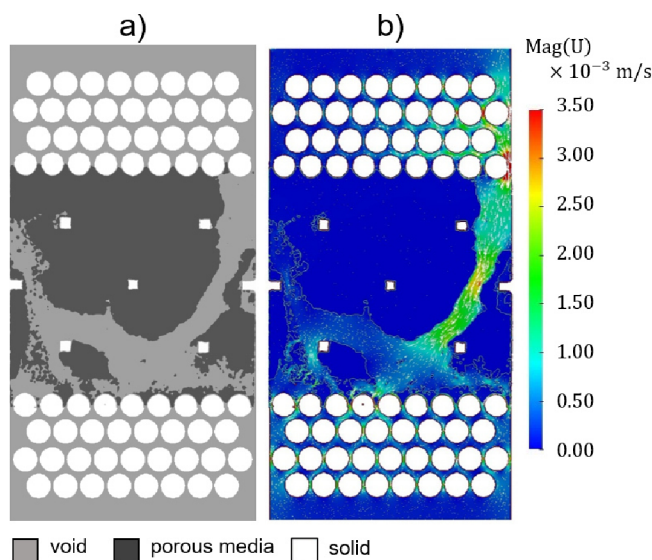


Fig. 7 a) 2D representation of the domains of experiment B implemented in the numerical simulations b) associated velocity fields computed by the micro-continuum model.

French Agency for Research (Agence Nationale de la Recherche, ANR) through the Equipex Planex ANR-11-EQPX-36, the labex Voltaire ANR-10-LABX-100-01, the grant CATCH ANR-18-CE05-0035, and through the FraMatI project under contract ANR-19-CE05-0002. JP and SR would like to thank the DAAD and PROCOPE (Partenariat Hubert Curien) for their grant that enable the scholar exchange of scientists. This work was conducted with the technical support of Katherina Damen (IEK-6, FZJ). Last but not the least, JP would like to thank Guillermo Beltramo (ICS-7, FZJ) for his guidance in the selection of the Raman Microscope used in this work as well as Dietrich Kohlheyer (IBG-1, FZJ) for his guidance in setting up a microfluidic laboratory at IEK-6, FZJ.

Contribution of authors

JP designed the micromodel. JP and SR designed and conducted the experiments and processed the experimental results. CS conducted the modelling. JP, SR and CS discussed, interpreted the results and wrote the paper. AB fabricated the silicon wafer. GD and DB applied for funding (HGF, BMBF) and revised the manuscript.

Notes and references

- C. I. Steefel, C. A. J. Appelo, B. Arora, D. Jacques, T. Kalbacher, O. Kolditz, V. Lagneau, P. C. Lichtner, K. U. Mayer, J. C. L. Meeussen, S. Molins, D. Moulton, H. Shao, J. Simunek, N. Spycher, S. B. Yabusaki and G. T. Yeh, *Computational Geosciences*, 2015, **19**, 445–478.
- S. Molins and P. Knabner, *Reviews in Mineralogy and Geochemistry*, 2019, **85**, 27–48.
- J. Poonoosamy, C. Wanner, P. Alt Epping, J. F. Águila, J. Samper, L. Montenegro, M. Xie, D. Su, K. U. Mayer, U. Mäder, L. R. Van Loon and G. Kosakowski, *Computational Geosciences*, 2018, 1–22.
- A. Idiart, M. Laviña, G. Kosakowski, B. Cochepin, J. C. Meeussen, J. Samper, A. Mon, V. Montoya, I. Munier, J. Poonoosamy, L. Montenegro, G. Deissmann, S. Rohmen, L. H. Damiani, E. Coene and A. Nieves, *Applied Geochemistry*, 2020, **115**, 104562.
- A. Tartakovsky, G. Redden, P. Lichtner, T. Scheibe and P. Meakin, *Water Resources Research*, 2008, **44**, year.
- G. Katz, B. Berkowitz, A. Guadagnini and M. Saaltink, *Journal of Contaminant Hydrology*, 2011, **120-121**, 27–44.
- J. Poonoosamy, G. Kosakowski, L. Van Loon and U. Mäder, *Journal of Contaminant Hydrology*, 2015, **177-178**, 1–17.
- A. Chagneau, F. Claret, F. Enzmann, M. Kersten, S. Heck, B. Madé and T. Schäfer, *Geochemical Transactions*, 2015, **16**, year.
- A. Rajyaguru, E. L'Hôpital, S. Savoye, C. Wittebroodt, O. Bildstein, P. Arnoux, V. Detilleux, I. Fatnassi, P. Gouze and V. Lagneau, *Chemical Geology*, 2019, **503**, 29–39.
- N. Seigneur, K. U. Mayer and C. I. Steefel, *Reviews in Mineralogy and Geochemistry*, 2019, **85**, 197–238.
- S. Churakov and N. Prasianakis, *American Journal of Science*, 2018, **318**, 921–948.
- C. Noiriél, P. Gouze and D. Bernard, *Geophysical Research Letters*, 2004, **31**, 1–4.
- J. Poonoosamy, M. Klinkenberg, G. Deissmann, F. Brandt, D. Bosbach, U. Mader and G. Kosakowski, *Geochimica et Cosmochimica Acta*, 2020, 43–60.
- N. Prasianakis, M. Gatschet, A. Abbasi and S. Churakov, *Geofluids*, 2018, **2018**, year.
- C. Soulaïne, S. Roman, A. Kovscek and H. A. Tchelepi, *J. Fluid Mech.*, 2017, **827**, 457–483.
- C. Soulaïne, S. Roman, A. Kovscek and H. A. Tchelepi, *Journal of Fluid Mechanics*, 2018, **855**, 616–645.
- S. Molins, C. Soulaïne, N. Prasianakis, A. Abbasi, P. Poncet, A. Ladd, V. Starchenko, S. Roman, D. Trebotich, H. Tchelepi and C. Steefel, *Computational Geosciences*, 2020, 1–34.
- J. Poonoosamy, S. Haber-Pohlmeier, H. Deng, G. Deissmann, M. Klinkenberg, B. Gizatullin, S. Stapf, F. Brandt, D. Bosbach and A. Pohlmeier, *Minerals*, 2020, **10**, 226.
- J. Kulenkampff, M. Stoll, M. Gründig, A. Mansel, J. Lippmann-Pipke and M. Kersten, *Scientific Reports*, 2018, **8**, year.
- A. Shafizadeh, T. Gimmi, L. Van Loon, A. Kaestner, E. Lehmann, U. Maeder and S. Churakov, author, 2015, pp. 516–523.
- N. I. Prasianakis, E. Curti, G. Kosakowski, J. Poonoosamy and S. V. Churakov, *Scientific Reports*, 2017, **7**, 13765.
- C. Noiriél, P. Gouze and B. Madé, *Journal of Hydrology*, 2013, **486**, 211–223.
- S. Molins, D. Trebotich, L. Yang, J. B. Ajo-Franklin, T. J. Ligocki, C. Shen and C. I. Steefel, *Environmental Science & Technology*, 2014, **48**, 7453–7460.
- S. Roman, C. Soulaïne, M. A. AlSaud, A. Kovscek and H. Tchelepi, *Adv. Water Resour.*, 2016, **95**, 199–211.
- W. Song, T. W. de Haas, H. Fadaei and D. Sinton, *Lab Chip*, 2014, **14**, 4382–4390.
- R. Singh, M. Sivaguru, G. A. Fried, B. W. Fouke, R. A. Sanford,

- M. Carrera and C. J. Werth, *Journal of Contaminant Hydrology*, 2017, **204**, 28 – 39.
- 27 W. Hummel, U. Berner, E. Curti, F. Pearson and T. Thoenen, *Radiochimica Acta*, 2002, **90**,.
- 28 A. Grunberger, C. Probst, S. Helfrich, A. Nanda, B. Stute, W. Wiechert, E. von Lieres, K. Nöh, J. Frunzke and D. Kohlheyer, *Cytometry Part A*, 2015, **87**, 1101–1115.
- 29 A. Burmeister, F. Hilgers, A. Langner, C. Westerwalbesloh, Y. Kerkhoff, N. Tenhaef, T. Drepper, D. Kohlheyer, E. von Lieres, S. Noack and A. Grunberger, *Lab on a chip*, 2019, **19**, 98 – 110.
- 30 D. GOOSSENS, *Sedimentology*, 2008, **55**, 65–96.
- 31 B. Schmid, J. Schindelin, A. Cardona, M. Longair and M. Heisenberg, *BMC bioinformatics*, 2010, **11**, 274.
- 32 K. Ben Mabrouk, T. H. Kauffmann, H. Aroui and M. D. Fontana, *Journal of Raman Spectroscopy*, 2013, **44**, 1603–1608.
- 33 M. Klinkenberg, J. Weber, J. Barthel, V. Vinograd, J. Poonoosamy, M. Kruth, D. Bosbach and F. Brandt, *Chemical Geology*, 2018, **497**, 1–17.
- 34 F. Brandt, M. Klinkenberg, J. Poonoosamy, J. Weber and D. Bosbach, *Minerals*, 2018, **8**, year.
- 35 C. Soullaine and H. A. Tchelepi, *Transport In Porous Media*, 2016, **113**, 431–456.
- 36 C. Soullaine, F. Gjetvaj, C. Garing, S. Roman, A. Russian, P. Gouze and H. Tchelepi, *Transport in Porous Media*, 2016, **113**, 227–243.
- 37 H. Lamb, *Hydrodynamics*, Cambridge, University Press, 3rd edn, 1906.
- 38 J. J. De Yoreo and P. G. Vekilov, *Reviews in Mineralogy and Geochemistry*, 2003, **54**, 57–93.
- 39 H. Jung and A. Navarre-Sitchler, *Geochimica et Cosmochimica Acta*, 2018, **234**, 70–83.
- 40 H. Deng, S. Molins, D. Trebotich, C. Steefel and D. DePaolo, *Geochimica et Cosmochimica Acta*, 2018, **239**, 374–389.
- 41 H. Deng, C. Steefel, S. Molins and D. DePaolo, *ACS Earth and Space Chemistry*, 2018, **2**, 112–124.
- 42 B. Berkowitz, I. Dror, S. Hansen and H. Scher, *Reviews of Geophysics*, 2016, **54**, 930–986.
- 43 C. Noiriel, L. Luquot, B. Madé, L. Raimbault, P. Gouze and J. van der Lee, *Chemical Geology*, 2009, **265**, 160–170.
- 44 J. Poonoosamy, C. Westerwalbesloh, G. Deissmann, M. Mahrous, E. Curti, S. Churakov, M. Klinkenberg, D. Kohlheyer, E. von Lieres, D. Bosbach and N. Prasianakis, *Chemical Geology*, 2019, **528**, year.