

Prospective assessment of energy technologies: a comprehensive approach for sustainability assessment

M. Haase^{1,*}, C. Wulf², M. Baumann¹, C. Rösch¹, M. Weil^{1,3}, P. Zapp², T. Naegler⁴

¹Karlsruhe Institute of Technology (KIT), Institute for Technology Assessment and Systems Analysis (ITAS), Karlsruhe, Germany

*email: martina.haase@kit.edu

²Forschungszentrum Jülich (FZJ), Institute of Energy and Climate Research – Systems Analysis and Technology Evaluation (IEK-STE), Jülich, Germany

³Karlsruhe Institute of Technology (KIT), Helmholtz Institute Ulm (HIU), Ulm, Germany

⁴German Aerospace Center (DLR), Department of Energy Systems Analysis, Institute of Networked Energy Systems, German Aerospace Center (DLR), Stuttgart, Germany

Abstract

Background

A further increase in renewable energy supply is needed to substitute fossil fuels and combat climate change. Each energy source and respective technologies have specific techno-economic and environmental characteristics as well as social implications. This paper presents a comprehensive approach for prospective sustainability assessment of energy technologies developed within the Helmholtz Initiative “Energy System 2050” (ES2050).

Methods

The “ES2050 approach” comprises environmental, economic, and social assessment. It includes established life cycle based economic and environmental indicators, and social indicators derived from a normative concept of sustainable development. The elaborated social indicators, i.e. patent growth rate, acceptance, and domestic value added, address three different socio-technical areas, i.e. innovation (patents), public perception (acceptance), and public welfare (value added).

Results

The implementation of the “ES2050 approach” is presented exemplarily and different sustainability indicators and respective results are discussed based on three emerging technologies and corresponding case studies: (1) synthetic biofuel for mobility; (2) hydrogen from wind power for mobility; (3) batteries for stationary energy storage. For synthetic biofuel, the environmental advantages over fossil gasoline are most apparent for the impact categories Climate Change and Ionizing Radiation - human health. Domestic value added accounts for 66 % for synthetic biofuel compared to 13 % for fossil gasoline. All hydrogen supply options can be considered to become near to economic competitiveness with fossil fuels in the long term. Survey participants regard Explosion Hazard as the most pressing concern about hydrogen fuel stations. For Li-ion batteries, the results for patent growth rate indicate that they enter their maturity phase.

Conclusions

The “ES2050 approach” enables a consistent prospective sustainability assessment of (emerging) energy technologies, supporting technology developers, decision-makers in politics, industry, and society with knowledge for further evaluation, steering, and governance. The approach presented is considered rather a starting point than a blueprint for the comprehensive assessment of renewable energy technologies though, especially for the suggested social indicators, their significance and their embedding in context scenarios for prospective assessments.

Keywords

Biomass, Energy Storage, Hydrogen, Life Cycle Assessment (LCA), Life Cycle Costing (LCC), Social Indicators, Sustainability Assessment

1. Background

The goal of the Paris Agreement of 2015 of limiting global warming to below 2 °C can only be achieved if the energy system transformation is implemented quickly and the goals are consistently pursued [1]. Besides reducing the energy demand of all technical activities and social services, a further increase in renewable energy sources for energy supply is required to substitute fossil fuels and combat climate change. The European Green Deal [2] and the German Energiewende [3] are ambitious socio-technical tasks that reach far into the future and comprise many renewable energy sources, such as wind, solar, biomass, and various corresponding technologies, respectively. Each technology has specific techno-economic and environmental characteristics, leading to different social implications. From a sustainability perspective, it is crucial to carry out a comprehensive assessment of renewable energy technologies, including all dimensions of sustainability, i.e. economic, environmental and social aspects, to support political navigation towards a sustainable energy system [4]. Besides greenhouse gas emissions, other environmental aspects are also affected and need to be considered, such as consuming finite resources and the release of environmental pollutants [5]. Against this background, there is a demand for sustainability assessment approaches for technologies, which should meet this request and at the same time offer easily understandable orientation knowledge not only on the environmental but also on the economic and social implications [6]. For the latter's assessment and the implementation of new technologies, the investigation of public perception and technology acceptance is of increasing importance [7]. Although there is growing recognition of the significance to harmonize and align the methodologies for prospective sustainability assessment of energy technologies, no general approach or standard method exists so far [8], [9], [10]. This is mainly due to the multitude and diversity of technologies and their contexts of application and implementation as well as the multitude of possible criteria and indicators for their evaluation [6], [11]. Another reason is the complex nature of sustainability, which is characterized by its generic normative principles, multidimensionality and long-term perspective (across generations) [12]. In order to make the broad concept of sustainability applicable as a guideline for an assessment process, it needs to be downscaled and adapted to the object of consideration, the context and the type of questions and assessment needs [6]. This operationalization step needs to be accomplished by selecting meaningful sustainability indicators to carry out prospective assessments [13].

To make a step forward to close this research gap, in this paper, a comprehensive approach for prospective and consistent sustainability assessment of energy technologies is presented, which was developed and applied within the Helmholtz Initiative “Energy System 2050” (ES2050) [14]. The developed approach, subsequently referred to as “ES2050 approach”, is generically applicable, i.e. allows for the assessment of different technologies in a consistent, and future-oriented manner. It

comprises economic and environmental life cycle assessment (LCA) and corresponding indicators as well as social indicators, derived from a normative concept of sustainable development. A harmonized environmental Life Cycle Assessment (E-LCA)-database as well as harmonized future framework conditions are used, e.g. projections of future mobility and energy mixes, projections of future energy prices, technology-specific progress rates and technology-specific assumptions on future efficiencies. In this paper, the application of the developed approach is presented for three different emerging technologies and corresponding case studies, which were object of research in the ES2050 project. The chosen case studies cover a wide variety of different aspects concerning e.g. level of detail in modeling, sources of renewable energies, as well technical concepts:

- (1) Synthetic biofuels for mobility
- (2) Hydrogen from wind power for mobility
- (3) Batteries for stationary energy storage.

All three case studies and related technologies are important to support the transformation of the energy system as well as the mobility sector [15], [16] and are named explicitly in the German Integrated National Energy and Climate Plan [17] and in the European Green Deal [2]. They can especially help improving matching energy demand and energy production from renewable energy sources, resource efficiency and security of supply: Solar and wind technologies are characterized by intermittent generation behavior that has to be mitigated by stationary energy storage technologies like batteries or other conversion technologies such as Power-to-Liquid- or Power-to-Gas-technologies. Stationary batteries can especially help to cushion load peaks in energy demand, carry out voltage power control, frequency stabilization of the power grid, and to avoid additional grid expansion. The production of hydrogen via alkaline water electrolysis is another option to store fluctuating energy from renewable sources and the application of hydrogen in fuel cells is a possibility to use this energy for mobility. Solid biomass stores energy and carbon dioxide in a natural way and is in line with other technologies an important resource to compensate fluctuating availabilities of wind and solar power. Biomass can be converted via pyrolysis, gasification, and synthesis into so-called advanced biofuels as renewable alternatives for the transportation sector [16]. Thus, in this paper, the “ES2050 approach” as well as methods and indicators used for prospective sustainability assessment are presented and results are shown and discussed exemplarily for the above mentioned case studies. The comprehensive sustainability assessment of the respective energy technologies using all indicators of the developed approach will be subject of future research papers.

2. State-of-the-Art

In the following sub-sections, concepts for sustainable development (section 2.1) and methods for sustainability assessment of energy technologies (section 2.2) are presented. Sustainability concepts, such as the Integrative Concept of Sustainable Development (ICoS) and the Sustainable Development Goals (SDGs), and their underlying rules and targets need to be operationalized for the prospective assessment of energy technologies. Although these concepts and frameworks are not structured along different pillars or dimensions of sustainability, this could be achieved, in a first step, by using the so-called triple-bottom line model of sustainability with its environmental, economic and social dimension and corresponding life cycle based assessment methods [18], [19].

2.1 Concepts for sustainable development

The latest and most relevant political framework of sustainable development are the 17 SDGs with corresponding targets and 230 sustainability indicators defined by the United Nations [20]. The SDGs of the 2030 Agenda for Sustainable Development partly build upon the eight Millennium Development

Goals (MDGs) adopted by the UN in 2000 [21]. They are aiming at an array of issues, such as slashing poverty, hunger, diseases, gender inequality as well as improving access to fresh water and sanitation. Each SDG has specific targets to be achieved until 2030 and corresponding indicators to measure their achievement. One of these 17 SDGs is to ensure access to affordable, reliable, sustainable and modern energy for all (SDG Goal 7). To achieve this goal, targets are e.g. substantial increase of the share of renewable energy in the global energy mix and the doubling of the global rate of improvement in energy efficiency by 2030. Corresponding indicators are e.g. renewable energy share in the total final energy demand and energy intensity measured in terms of primary energy and gross domestic product (GDP). There are a couple of recent works available where the inclusion of SDGs for (energy) technology assessment is discussed: E.g. in [22] indicators for sustainability assessment of electrolytic hydrogen production are selected based on the SDGs, comparing the implications due to the selection based on overall goals and on SDG indicators level. In [23] renewable energy sources selection is carried out according to SDG-linked criteria (SDG 7) and in [24] the potential of Waste-to-Energy technologies to support SDG 7 is assessed.

Another well-founded science-based conceptual approach is the ICoS, developed within the German Helmholtz Association [25], [26]. ICoS is based on the Brundtland report [27], the Rio Declaration [28] and the Agenda 21 [29] and comprises three central goals and preconditions of sustainable development [30]: Securing Human Existence, Maintaining Society's Productive Potential, and Preserving Society's Options for Development and Action. These goals are specified by 15 substantial sustainability rules, e.g. protection of human health, sustainable development of man-made, human, and knowledge capital, participation in societal decision-making processes, conservation of social resources, and ten instrumental rules, necessary to achieve the substantial goals, e.g. society's ability of self-organization [30]. ICoS has been contextualized and applied to date in different projects and consultancy activities including e.g. sustainable development of megacities, municipal solid waste management, and water management in emerging countries [31], [32], [33]. ICoS was also applied for the sustainability assessment of the German energy system where the evaluation was carried out based on an integrative and comprehensive sustainability indicator system (SIS) aligned with ICoS [30], [34].

The triple bottom line model of sustainability basically says that for achieving more sustainable futures, environmental, economic as well as social impacts of activities have to be taken into account [35]. According to Klöpffer [36], any environmental, economic, or social assessment method has to take into account the respective full life cycle (raw material extraction, production, use, recycling or waste disposal) of an activity or product respectively. The original concept of Life Cycle Assessment (LCA) only dealt with the environmental component [35]. It was harmonized through SETAC's coordination and ISO's standardisation activities in the period of 1990-2000. The first decade of the twenty-first century has shown an increasing attention to LCA and it was increasingly used as a tool for supporting policies and performance-based regulations. In this period, e.g. life cycle-based carbon footprint standards were established and LCA methods were elaborated in further detail [35]. LCA subsequently broadened itself from a merely environmental LCA (E-LCA) to a more comprehensive Life Cycle Sustainability Assessment (LCSA) including Life Cycle Costing (LCC) and social LCA (S-LCA) [37].

2.2 Life cycle based assessment methods for energy technologies

One method for sustainability assessment at the technology level and starting point for the developed "ES2050 approach" is LCSA. LCSA is drawing on the three pillar or "triple bottom line" model of sustainability (see section 2.1) and combines the already existing life cycle based approaches for environmental, economic, and social LCA (E-LCA + LCC + S-LCA) [36], [37], [38]. A good overview of the

current status of LCSA give Costa et al. [39] and Wulf et al. [6]. Both author groups observed an increasing interest in LCSA over the last years with higher publication numbers and a wider field of authors. Energy technologies and mobility aspects are an often discussed topic in LCSA and account for almost half of the available LCSA case studies [6]. Costa et al. [39] mainly criticize the lack of harmonization in LCSA. In particular, the variety of impact categories or just indicators with different quality standards leads to different results that can hardly be compared [39]. While S-LCA is still under development, both LCC and E-LCA are widely recognized and applied procedures for the assessment of environmental impacts and costs of (emerging) technologies [40], [41], [42]. In [43] prospective LCA is defined as the future-oriented assessment of (emerging) technologies in an early phase of development (e.g., experimental setting or small-scale production) while the technology is modeled at a future, more developed phase (e.g., large-scale production). The challenges of assessing emerging technologies at an early stage using prospective LCA and how to deal with these challenges is increasingly discussed in the LCA community [44], [45] [46]. Thonemann et al. [47] identify comparability (e.g. with respect to chosen system boundaries and methodologies for impact assessment), data (availability, quality, and scaling), and uncertainty as main challenges for conducting prospective LCAs. Prospective aspects with respect to LCA-studies refer first of all to assumptions on the future development of the processes under consideration, i.e. associated mass and energy flows and process efficiencies, but also to assumptions on future raw materials supply chains, background processes, e.g. future electricity and heat mix, transport systems, and industrial process chains, and therefore also deals with the large epistemological uncertainty about the future in order to support more robust future assessments of technologies [48]. Prospective developments of the technology under consideration can be included using literature surveys and/or learning curve models, not only for economic developments but also for developments with respect to material efficiencies and emissions [49]. Also, future background scenarios, e.g. on energy and mobility mixes, need to be defined and used consistently for prospective studies, as there is evidence of the impacts of these background processes, in particular the ones which are based on energy, and the reference processes [49].

2.2.1. Environmental Life Cycle Assessment

Environmental Life Cycle Assessment, which has fast developed over the past three decades, is now a standard tool among scientists and widely applied to assess the environmental impacts of energy technologies (e.g. [50] [51], [52], [53]). Besides, E-LCA is included in the 14000 series of environmental management standards of the International Organisation for Standardisation (ISO), in particular in ISO 14040 [54] and ISO 14044 [55]. The life cycle of a product is modelled as a so-called product system. All inputs and outputs of the product system are quantified and summarized within the so-called life cycle inventory (LCI). The LCI comprises information on resource consumption and emissions for each process step and corresponding upstream and downstream processes along the value chain and is the basis for the subsequent life cycle impact assessment (LCIA). For LCIA, a number of established methods for environmental impact assessment exist, amongst others the methods according to CML [56], ReCiPe [57] and ILCD [58]. These methods include different sets of environmental impact categories, e.g. Acidification, Climate Change, Ecotoxicity, Eutrophication, Human Toxicity and Resource Depletion, and are partly using different indicators and different calculation methods for the same impact category. To build-up an LCI and to carry out LCIA, different software packages, e.g. openLCA [59], umberto [60], GaBi [61] are available which have internal databases, e.g. GaBi database, or can be used with external LCA-databases, e.g. software openLCA with database ecoinvent [62]. These databases include various LCIs for industrial processes and various products and can be used to model the background processes, i.e. upstream and downstream processes, of the process under consideration. Both, the choice of the method package/indicator set and E-LCA-database can have a significant influence on the results. With respect to prospective

assessments, questions of e.g. future raw materials supply, emission reductions, resource efficiencies and/or recycling are of major concern, not only for the processes under consideration but also for background processes.

2.2.2 Life Cycle Costing

The term “Life Cycle Costs” is defined as “total” costs generated by a system during its service life time not only from the operator point of view but for all actors in the product system [63], [64]. If the analysis are carried out from the users perspective, the term “total costs of ownership” (TCO) is commonly used [65]. The method aims at minimizing total costs and maximizing the yields of a system and the related activities and processes arising over its life cycle [63]. According to [63], life cycle costs can be divided into the three stages “before utilization”, “during utilization,” and “after utilization” or three different costs types “Capital Expenditures” (CAPEX), “Operational Expenditures” (OPEX), “End Of Life Expenditures” (EOLEX) [66], [67]. Starting from material and energy flows modelled, CAPEX estimations (investment estimations) are typically carried out using empirical values on purchased costs for main equipment of a specific size together with scaling factors and percentages for direct costs, e.g. purchased equipment installation, and indirect costs, e.g. engineering and supervision [68]. Operational expenditures include, e.g. costs for raw materials, operating labor, utilities, maintenance and repairs, operating supplies, taxes and insurance [68]. Economic feasibility of technologies and processes can be assessed using economic indicators such as manufacturing costs of products, net present value or payback period of projects [68], [69]. Prospective LCC provides guidance to technology developers and policymakers and shows if and how a technology could be delivered into the market. In order to discount all costs to a common reference point, levelized costs are commonly used as an indicator [70], [4], [71]. Concerning prospective economic assessments, amongst others, assumptions on future prices for e.g. raw and operating materials, process efficiencies, personal demand and/or process automation, as well as on investor expectations need to be made.

2.2.3. Social Life Cycle Assessment

When compared with E-LCA, the level of development, application, and harmonization of S-LCA is still in a preliminary stage because S-LCA is fragmented and a general theoretical concept for which empirical data are widely missing [72], [73], [38]. The S-LCA guidelines from UNEP [74] are based on six social and socio-economic impact categories (e.g. human rights, working conditions, health and safety, etc.) with 40 subcategories and five stakeholder groups (society, worker, consumer, value chain actors and local community) and on context-dependent inventory indicators. The UNEP guidelines [74] do not provide an agreed and standardized framework for social indicators that reflect and measure social impacts of technologies and processes along product life cycles and supply chains. Indicators need to be explicitly defined for different case studies, which makes results difficult to be compared. Nevertheless, the UNEP guidelines are the current landmark in the field. Indicators for S-LCA are often assessed based on qualitative information rather than quantitative, given the nature of the social aspects under assessment. Even more than for E-LCA and LCC, for S-LCA site-specific data need to be collected as social impacts are mainly due to the company’s conduct in a specific geographic location [72]. Lehmann et al. [75] emphasize the lack of data for S-LCA especially of processes still under development and conclude that S-LCA studies are only feasible if companies and institutions involved in the supply chain of the technologies are known. This is especially challenging for prospective assessments. As no standardized and manageable set of social indicators so far exists, the choice of social indicators in LCSA is challenging. Existing LCSA studies mainly justify the more or less arbitrary choice of social indicators with the specific characteristics of the case studies [76], [77]. In some cases, environmental indicators are used as indicators for social issues (e.g. human toxicity potential as an

indicator for „Health and Safety“, global warming potential for „Intergenerational issues“) [4]. This approach serves the social pillar, but the set of indicators is ultimately not extended compared to an E-LCA. According to [6], [78], [79], S-LCA must become a more standardized method before LCSA can be harmonized.

3. Methods: Development of the “ES2050 approach”

The appropriate selection and assessment of sustainability indicators for the evaluation of technologies as part of the complex energy system and its transition is a grand challenge since there are many alternatives and criteria that need to be analyzed and evaluated. The discussion on LCSA in general and the challenges of the S-LCA approach, in particular, show that there are good reasons to develop and test other approaches for prospective sustainability assessment at the technology level. This applies predominantly to the inclusion of the social dimension of sustainability for technology assessment. Additionally, there is a need for a generic approach, which is applicable for different technologies and which allows for the prospective and comprehensive technology assessment using consistent system boundaries, future framework conditions, indicators and data where possible and necessary. In this work, we propose and apply a generic and comprehensive sustainability assessment approach for prospective technology assessment. Our approach is addressing three criteria, which we believe are essential for the selection of sustainability indicators:

- (1) contextualization of sustainability and corresponding goals such as the SDGs or the rules of ICoS and the integration of all three dimensions of sustainable development (environment, economy, and society),
- (2) transparent selection of meaningful indicators based on the availability of methods to analyse the indicator and of data to measure the indicator,
- (3) limitation of selected indicators to a practicable and manageable number, easy to communicate and to apply.

3.1 Overview

The “ES2050 approach” consists of the three elements environmental, economic and social assessment (cf. Figure 1). It includes life cycle based economic and environmental indicators together with social indicators.. In this paper, social indicators are derived from the Integrative Concept of Sustainable Development (ICoS) and the corresponding Sustainability Indicator System (SIS) developed within the Helmholtz Alliance ENERGY-TRANS (see section 2.1). The chosen methods and indicators are characterized in section 3.2. It should be noted that other indicator sets that take into account the above mentioned three criteria would also be possible. The “ES2050 approach” allows for the identification of sustainable energy technologies for the energy transition systematically and prospectively and can be applied to all kinds of energy technologies within a specific spatial and temporal context. This requires, first of all, accurate and reliable characterization of the respective technologies, including future assumptions on material and energy flows as well as efficiencies, supply chains and emission controls. Also, for the characterization of upstream and downstream processes, consistent databases are needed. Additionally, especially for the prospective assessment of different technologies, a consistent assessment framework, i.e. harmonized system boundaries as well as assumptions concerning economic, environmental and social input data, and a consistent background

scenario concerning e.g. energy and mobility mix, is needed. The case studies as well as the assessment framework are described in section 0.

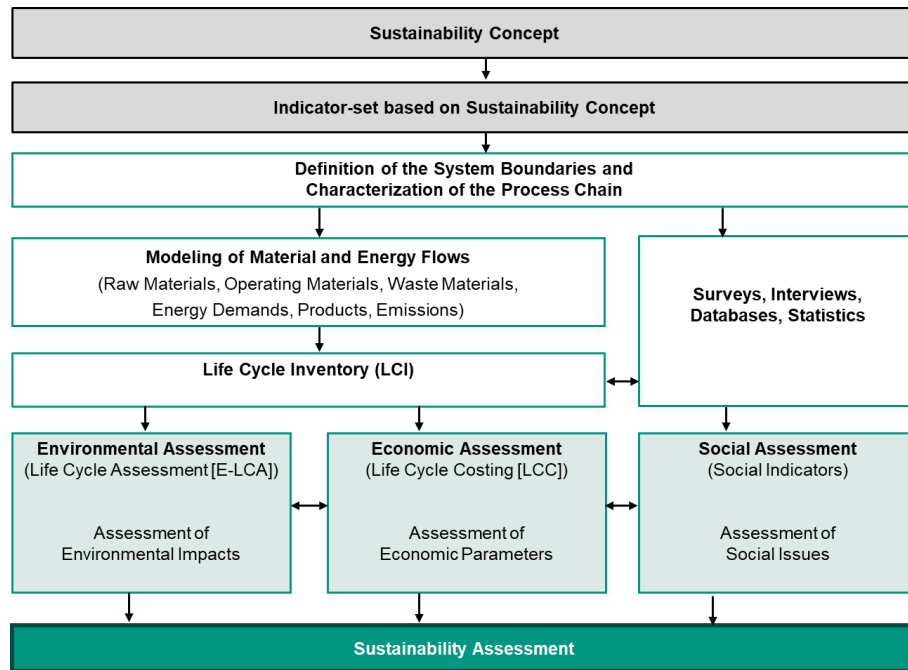


Fig. 1: “ES2050 approach” for sustainability assessment of energy technologies

3.2 Methods and indicators

In this section methods and indicators, used for economic (section 3.2.1), environmental (section 3.2.2), and social (section 3.2.3) assessment within the “ES2050 approach”, are characterized. While existing and established methods are proposed for economic and environmental assessment, indicators and methods for social assessment are conceptually elaborated.

3.2.1. Economic assessment

For economic assessment, the method LCC is chosen. As economic indicator, total costs (TC) are calculated and discounted to a common reference point i.e. levelized total costs (LTC) are estimated according to equation (1) (cf. [70]).

Starting point of cost estimations is a detailed investment estimation (CAPEX, i.e. expenses before commissioning). Based on mass and energy flows, main plant components are designed in their size and type and related investments are estimated using price tables and manufacturer’s data. Investment for direct and indirect secondary components are estimated as percentages from main components (cf. [68]) or secondary literature. Operating costs – here divided into consumables (raw materials, utilities, operating supplies) and other operating costs (labor, maintenance and repairs, taxes and insurance, overhead) – and revenues for by-products are estimated based on mass and energy flows together with price data for current and future years.

$$LTC = \frac{I_0 + \sum_{t=1}^n \frac{(o_t + c_t - r_t)}{(1+i)^t}}{\sum_{t=1}^n \frac{M_t}{(1+i)^t}} \quad (1)$$

with

LTC: Levelized Total Costs (€/unit); *I*₀: capital Expenditures in *t* = 0 less residual value in *t* = *n* (€); *o*: annual operating costs (€/a); *c*: annual costs for consumables (€/a); *r*: annual revenues (€/a); *M*: annual produced amount (unit/a); *n*: economic lifetime (a); *t*: year of use period; *i*: interest rate

The same LCC approach can be used to analyze two different economic perspectives: (1) A business economic perspective where the interest rate is determined in such a way that a company makes profit. For this perspective, a range between 7% and 9% is proposed. If desired, the depreciation period, i.e. economic lifetime, may be shorter than the technical lifetime of the individual components. (2) A macroeconomic perspective where the interest rate is set between 1.5% and 3.5%. This range of interest rate only reflects the cost of raising capital on the financial market. A reference point for that are the interest rates on listed Federal securities for Germany [80]. For this perspective, the depreciation period corresponds to the technical lifetime of the components. The chosen ranges for the two perspectives result in bandwidths for LTC. In both cases, taxes are not considered. Prospective LCC-specific aspects include learning curves and progress rates for investment estimations, and price projections for raw materials and utilities (including e.g. prices for crude oil, natural gas and electricity).

3.2.2. Environmental assessment

The environmental evaluation is carried out following the methodology for LCA according to the international standards ISO 14040 [54] and ISO 14044 [55]. For preparing the LCI, all upstream and downstream processes, i.e. raw materials and energy supply, provision of operating materials and infrastructure (including facility construction), waste and wastewater disposal (including facility deconstruction), as well as product use are included using the open source software openLCA v1.7 [59] together with datasets from the ecoinvent database v3.3 (cut-off-system model) [62]. Likewise, the reference processes are modelled using ecoinvent datasets. As far as possible, specific datasets for Germany (DE) are used. If no datasets are available for Germany, datasets for Switzerland (CH), Europe (RER) or worldwide datasets (GLO) are used. The modelling of electricity production is based on assumptions on gross power generation per energy carrier and technology shares per energy carrier as given in Annex A 1.2 (Table 1.2.1). Within our study, we apply 13 environmental impact categories, methods and indicators at midpoint level, as recommended in the ILCD Handbook of the European Commission (cf. Table 1). According to [58], indicators and corresponding impact assessment methods are classified as I: recommended and satisfactory, II: recommended but in need of some improvements, III: recommended, but to be applied with caution, Interim: not recommended to use. Impact categories whose impact assessment methods are classified as „interim“ or „III“ are neglected in this study (i.e. ionizing radiation, ecosystems; land use; resource depletion, water). The corresponding impact assessment methods are used in our study within the software openLCA [59] and are provided by GreenDelta (LCIA methods v2, ILCD 2011, midpoint). Prospective E-LCA-specific aspects include assumptions on future emission controls of machinery along the value chain of the respective technology and on the fuel and technology mix of the future energy and mobility mix.

Table 1: Environmental impact categories, indicators and corresponding units for midpoint indicators according to [58]

Impact Category		Shortcut	Indicator	Indicator Unit	Comment on cause and effect chain
Acidification		Acid	Accumulated Exceedance	molc H+ eq	Acid rain → Impact on Biodiversity, Bioproductivity in Soils, Lakes, Rivers, Oceans
Climate Change		CC	Radiative Forcing as Global Warming Potential (GWP100)	kg CO2 eq	Change in Radiative Forcing in the Atmosphere → Increase in Temperature on Earth
Ecotoxicity (freshwater)		Ecotox-fw	Comparative Toxic Unit for Ecosystems	CTUe	Emissions of Chemicals → Loss in Biodiversity
Eutrophication	aquatic, freshwater	Eutr-fw	Fraction of Nutrients Reaching Freshwater end Compartment	kg P eq	Increased Nutrient Concentration in Aquatic Compartments → Algal Growth, Change in Species Composition, Oxygen Depletion → Damage to Aquatic Ecosystems
	aquatic, freshwater	Eutr-mar	Fraction of Nutrients Reaching Marine End Compartment	kg N eq	
	terrestrial	Eutr-ter	Accumulated Exceedance (AE)	mol N eq.	Deposition of Airborne Emissions on Land → Damage to Forestry, Crops, Terrestrial Ecosystems
Human Toxicity	cancer effects	HT-c	Comparative Toxic Unit for Humans	CTUh	Food Intake and Direct Exposure (e.g. Inhalation) to Toxic Substance → Cancer and Diverse other Diseases
	non-cancer effects	HT-nc	Comparative Toxic Unit for Humans	CTUh	
Ionizing Radiation, Human Health		IR-hh	Human Exposure Efficiency Relative to U235	kg U235 eq	Radioactive Release →Inhalation, Consumption of Food and Water → Hereditary and Cancer Effects
Ozone Depletion		OD	Ozone Depletion Potential (ODP)	kg CFC-11 eq	Increased UV-B Level on the Earth's Surface Skin Cancer → Negative Effects on Plant Growth
Particulate Matter/Respiratory Inorganics		PM	Intake Fraction for Fine Particles (kg PM2.5-eq/kg)	kg PM 2.5 eq	Absorption of Particles (<10 µm) through the Airways → Lung Problems, Cardiovascular Diseases
Photochemical Ozone Formation		POF	Tropospheric Ozone Concentration Increase	kg C2H4 eq	Ozone Pollution through the Oxidation of Carbon Monoxide (CO), Methane (CH4) and Volatile Hydrocarbons (VOC)
Resource Depletion, Mineral, Fossil and Renewable		RD	Scarcity	kg Sb eq	More Effort to Dismantle in the Future, e.g. Costs, Supply Risk

3.2.3 Social Assessment

In contrast to the chosen standardised and established LCC and E-LCA methods selected to carry out economic and environmental assessment, we do not follow the S-LCA approach to assess the social aspects of energy technologies. The main reason for this methodological change is that critical questions remain to be solved regarding S-LCA concerning methods, framework, paradigms, and indicators and a lack of reliable data. Therefore we are using selected rules of the ICoS (cf. section 2.1) together with the SIS, an indicator set based on these rules [30], to derive reasonable indicators for the social dimension of our approach. The SIS was developed within the Helmholtz Alliance ENERGY-TRANS to monitor the German energy transition. It consists of 45 indicators in total that align with the sustainability rules of ICoS [34]. As a start, we looked at indicators of the SIS aligned to two out of 15 substantial rules of ICoS related to social aspects of sustainability (cf. Table 2, Table A 1.1.1 and Table A 1.1.2 in Annex A 1.1). Our selection of indicators from the SIS aligned with these rules is driven by the preconditions “applicability for technology assessment”, “avoidance of overlapping with established E-LCA and LCC indicators”, and “feasibility and practicability of data availability, collection and analysis”. This results in three indicators for the assessment of the social dimension (see Table 2). Within the “ES2050 approach”, the chosen three indicators are further elaborated for the assessment of (energy) technologies. A short description of the developed indicators and corresponding methods for data gathering is given in the sub-sections below.

Table 2: Chosen ICoS rules [25] and corresponding social indicators for the ES2050 assessment approach

ICoS Rule	Social indicator of the “ES2050 approach”
10. Sustainable development of man-made, human and knowledge capital	Patent growth rate related to a specific technology
	Fraction of domestic value added related to a specific technology
15. Conservation of social resources	Acceptance of a specific energy technology

The elaborated social indicators, i.e. patent growth rate, domestic value added, and acceptance, address three different socio-technical areas, i.e. innovation (patents), public perception (societal acceptance), and public welfare (value added). It has to be noted, that changes in patent growth, societal acceptance, and domestic value added related to a specific technology have underlying long-term prerequisites, making them only partly suitable for the derivation of statements concerning the future using current data.

Number of domestic patents related to a specific technology

The suitability of patents as a proxy for technological innovation has been discussed considerably since the 1990s and even before [81]. Within the “ES2050 approach”, the number of patents, i.e. the respective growth rates for a defined period of time, are used as an indicator and country comparisons are carried out, i.e. national/international issues for patent applications for specific technologies, i.e. the role of Germany’s research and development (R&D) activities in the global context are analyzed. For patent analysis, the European Patent Office (EPO) database including the Open Patent Service (OPS) is used. The search queries are carried out for the time period 1995 – 2018 using Cooperative

Patent Classification (CPC)-Codes and keywords. For patent search and data analysis, an adopted and freely available python-based patent database crawler [82] together with a MS Excel template is used [83]. The template selects the five most active patenting countries in the considered technology field and compares them to Germany. By analyzing the patent activity, i.e. the sum of patents of a technology in a country over a period of time, not only the R&D activities of one country are evaluated concerning its technological and commercial interest [84], but also the R&D activities of other countries in the same technology field are compared. The so-called technology potential is characterized by the growth rate of patents of a technology in % for a defined time period [85]. A high patent growth rate can indicate a high innovation potential due to increased research effort in the area [86]. More details on methods and indicators for patent analysis can be found in [83]. In contrast to proposed LCC and E-LCA methods, the patent analysis on hand represents an ex-post evaluation. Although the growth rate of patents is analysed based on data from the past, it can be assumed that the identified relations between countries and the comparative competitiveness at the level of technical innovations and trends identified are meaningful at least for some years in a way to make feasible statements on future developments. This assumption is based on the fact that changes in patent growth do not happen suddenly but slowly because patents result from continuous research work and their elaboration as well as registration take sufficient time [83].

Acceptance of a specific energy technology

The acceptance of energy technologies is becoming increasingly important for the development and application of energy technologies [7]. Despite this increasing social relevance, no holistic technology acceptance indicator exists until now, enabling a dynamic (technology-independent) and prospective acceptance measurement of a technology. Nevertheless, there is evidence that technologies that are accepted today will also be accepted in the future and vice versa. This is shown for example by the representative acceptance surveys on the expansion of renewable energies conducted by the Agency for Renewable Energies (Agentur für Erneuerbare Energien - AEE) for more than ten years [87]. This is true unless there are new findings or events over time that lead to a change in the assessment of the benefit/burden ratio and the image in media/the public and thus the individual perception and acceptance of the technology. Thus, conclusions about the acceptance of the technology can already be drawn during technological development processes. This makes it possible in an agile manner to make flexible, user-oriented adjustments in terms of technology design to achieve higher acceptance due to better features and properties of a technology. Within our approach, a quantitative and qualitative survey is conducted focusing on (production) facilities or parts of the infrastructure of the ES2050 case studies about which citizens can express their views, expectations, and fears. Therewith, societal actors are directly involved for the assessment. To investigate public perception, an online survey is conducted based on the methodological background of [88] and [89]. After a short description of the respective technology, the participants are asked to express their concerns regarding this technology. Nine different types of concerns were put to choice, including an open field for further concerns. Furthermore, socio-demographic data is collected regarding gender, residence, income, activity, age, and education. The freely available online platform SoSci-Survey is used for conducting the survey. For the improvement of the questionnaire, a cognitive pre-test with five persons and a standard pre-test with ten persons was carried out. A more detailed description of the approach can be found in [90]. In the first survey, 211 valid responses were obtained in total by social networks to carry out first statistical tests. The second survey was distributed among 10,000 persons by the platform of SoSci-Survey [91], of which 1,032 responded. Out of this entirety, approximately one third referred to each of the three technologies [90], [92].

Domestic value added related to a specific technology

The pre-condition for a future higher share of domestic value added-creation is the availability of infrastructure and natural, human and capital resources as well as technology acceptance. In the “ES2050 approach”, for the assessment of the fraction of domestic value added as a proxy for job creation, a streamlined approach is implemented, modelling solely direct effects of locally invested money [93]. This is based on the premise that local investment most likely also creates or secures local jobs. In contrast, components purchased globally are not considered to contribute to further job growth in the assessed country or region [93]. This indicator aims to give a qualitative indication regarding whether the energy technology might have a positive effect on job development compared to a conventional technology [94]. For the implementation of the indicator, the data basis of the economic assessment is used: Each cost component, i.e. investment as well as operation and maintenance costs, is further specified: E.g. raw material costs are sub-divided to costs for raw materials provision and costs for raw materials transport. Costs for raw materials transport are in turn specified to costs for machinery (e.g. trucks), operating materials (e.g. fuel), and personnel (e.g. truck driver). At a sufficient level of detail, costs are divided by percentages into three categories: domestic value added, potential domestic value added, non-domestic value added. Based on shares for cost components, shares for domestic value added, potential domestic value added, and non-domestic value added can be calculated for total costs. For prospective assessments, estimated future costs and estimated prospective shares can be used for the estimation of the prospective domestic value added as a percentage of total costs, and assumptions can be made with respect to the expected future domestic job creation potential of the respective technology.

3.3 Characterization and modelling of three case studies

Within the subsequent sections, the uniform system boundaries for E-LCA and LCC (section 3.3.1), the case study “Synthetic biofuels for mobility” (section 3.3.2), the case study “Hydrogen from wind power for mobility” (section 3.3.3), and the case study “Batteries for stationary energy storage” (section 3.3.4) are characterized. The chosen case studies demonstrate the applicability of the developed “ES2050 approach” independent from the respective technology, as they cover e.g. different types of renewable energies, conversion technologies, and levels of detail. While the analysis for stationary batteries is conducted on the material/elementary level, the analysis of hydrogen and biofuel production concentrate on the plant component level. Furthermore, the case study on biofuels includes decentral and central production networks, while for hydrogen production, different distribution networks are included. It has to be noted that the chosen case studies, i.e. technologies examined, are not regarded in competition with one another, but are assumed to complement one another in a future energy system.

3.3.1 Consistent assessment framework

The year 2020 is used as the base year for the assessment while the year 2050 is used for future projections of impacts. For the prospective sustainability assessment of energy technologies, data from the Helmholtz Alliance ENERGY-TRANS, scenario “Target”, is used as a consistent framework regarding the future energy and mobility mix (including technology shares) as well as for price projections [95], i.e. Germany is used as spatial reference. For the base year, consistent statistical data is taken into account for electricity production mix and economic input data (see Annex A 1.2). If not stated differently, all input data for environmental assessment, i.e. emission data from technical processes, is based on the ecoinvent v3.3. database [62]. Also, as far as possible and reasonable, for domestic value added estimations, percentage values are assumed consistently across case-studies (see Annex A 1.2). For patent analysis, the European Patent Office (EPO) database including the Open Patent Service (OPS) is used. Beyond that, future improvement potentials of the investigated technologies are

considered, for example improvement of energy and resource efficiencies, closed-loop flows (recycling), and management of waste flows using literature data, i.e. learning curves and progress rates where possible and applicable. Technology-specific (prospective) aspects are given in sub-sections 3.3.2, 3.3.3 and 3.3.4.

Besides a consistent assessment framework, consistent system boundaries are defined for the different case studies. In Figure 2 the system boundary for E-LCA and LCC of the three case studies is displayed including the provision of raw materials, the technology itself and the product use. For the estimation of e.g. fuel production costs or the assessment of emissions related to fuel production excluding the usage in passenger cars, the system boundary is drawn after the production of the energy carriers (process step “Technology” in Figure 2). For both, the provision of operating materials, infrastructure as well as processes for disposal, recycling and deconstruction are considered. As a result, we balance the resources and emissions along the whole value chain, i.e. the product life cycle.

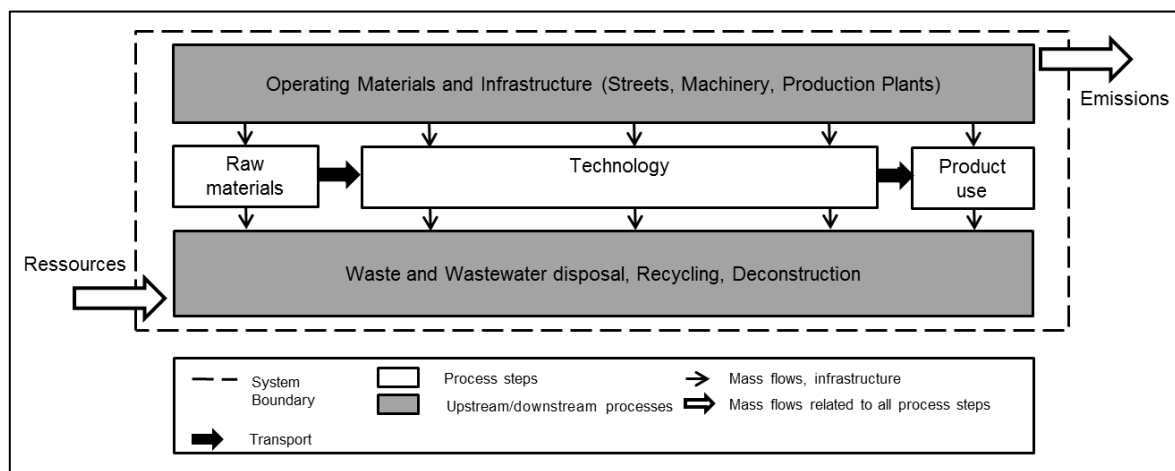


Fig. 2: System boundary for E-LCA and LCC of the three case studies

As mentioned above, it is not possible to strictly follow a life cycle approach for the social indicators. While we follow the system boundaries of the LCC approach for the indicator “domestic value added”, we determine and consider only distinct parts of the (conversion) technologies for the indicator “patent growth rate” (see section 4). For the indicator “acceptance”, we queried citizen concerns regarding the corresponding industrial production facilities of the new technologies or parts of the related infrastructure.

3.3.2. Case study: Synthetic biofuels for mobility

Solid biomass stores energy and carbon dioxide naturally and is an important resource to compensate fluctuating availability of wind and solar power [96]. So-called second generation biofuels are regarded as a promising renewable alternative to obtain liquid fuels for the transport sector as they do not compete with food and fodder production and at the same time bear a high potential for greenhouse gas emission reductions [16], [97], [98]. This case study focuses on the industrial scale thermochemical conversion of lignocellulosic biomass, i.e. residual cereal straw and residual forest wood, into fuel, electricity, and heat (bioliq® process chain). The considered process chain includes the provision of raw materials, the decentralized biomass conversion (chipping, drying, pyrolysis), the transport of the intermediate product (biosyncrude) to the centralized conversion steps (gasification, gas treatment, fuel synthesis, CHP), the feeding of electricity into the grid and the use of the gasoline in a passenger

car (cf. Figure 3). All process steps of Figure 3 are assumed to be located in Germany. It is assumed that straw is available on the fields in access, i.e. process steps for straw gathering and transport are considered while process steps for cereal cultivation and harvest are neglected. Straw is assumed to be collected around 11 pyrolysis plants (100 MW each) within a radius of 30 km and to be transported to the plants via tractor and trailer. The biosyncrude is assumed to be transported over a distance of 250 km by rail to the central production site (1000 MW gasifier). Fuel and electricity are obtained as products while heat is entirely used internally. For fuel use, a large passenger car is assumed for the base case [99], [100]. As reference processes, the production of conventional gasoline and its use in a passenger car and electricity production via German electricity production mix are considered. More detailed case study characteristics, including process parameters as well as mass and energy flows of the biomass conversion steps are summarized in [99] and [100]. For more information on the bioliq process developed at KIT cf. [98] and on residual straw potentials and transport cf. [101], [102], and [103]. For prospective assessment, higher efficiencies for CHP process for electricity generation are assumed (53 % in 2020, 67 % in 2050). Based on [104], efficiency enhancements of agricultural machinery using a progress rate of 0.94 based on [104] are assumed for 2050, leading to lower emissions for biomass provision (emissions are reduced by 6 % each time the cumulative production is doubled). For rail transport it is assumed that all diesel engines are equipped with particle filters in 2050. For prospective economic assessment of synthetic biofuel production, higher wholesale electricity prices and rising natural gas prices according to [95] and a progress rate for investment estimations of 0.95 based on [105] are assumed. Costs for biomass provision and slurry transport are based on own estimations based on [106] and on [107]. In this paper, no progress rates for biomass provision and slurry transport costs are assumed. Prospective manufacturing costs of fossil gasoline are calculated as average value of product acquisition costs of fossil gasoline of the last ten years according to [108]. When the use phase is included, i.e. for mobility cost estimations, prospective costs for fuel transport, storage and service stations are calculated as average value of contribution margin of fossil gasoline of the last ten years [108]. Car acquisition and operating costs are based on [109] and are assumed equal for 2020 and 2050 in this paper.

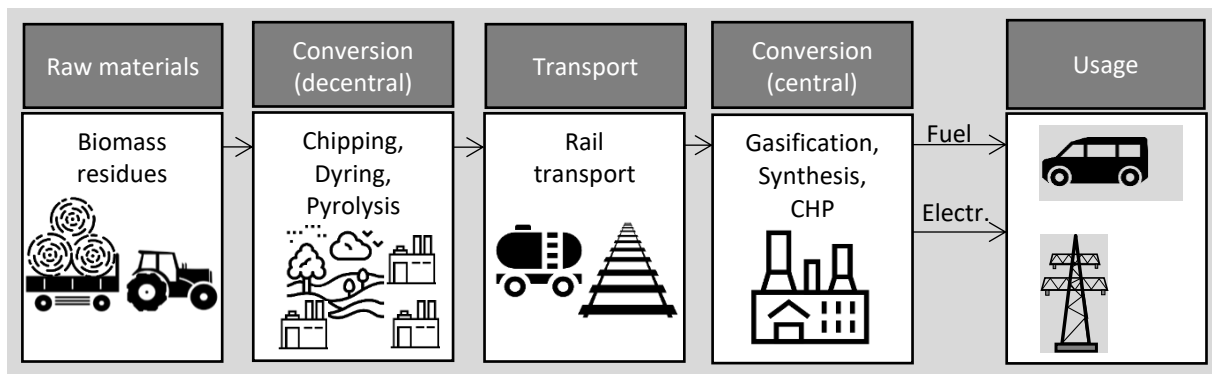


Fig. 3: Case study “Synthetic biofuels for mobility”, icons from [110]

3.3.3. Case Study: Hydrogen from wind power for mobility

Hydrogen can be used to help electrifying different sectors mainly to defossilize them, e.g. steel production [111]. Furthermore, hydrogen production can be used for balancing out electricity generation from variable renewable energy sources [112]. Hydrogen for mobility applications and other sectors has a chance to be climate friendly only when produced from renewable energy sources [113]. In addition to the potential reduction of greenhouse gases, fuel cell electric vehicles (FCEV) emit

only water at the point of use and therefore help fighting high emission levels in cities, e.g. particulate matter or nitrogen oxides. Within ES2050, a case study for Germany is discussed with wind power as an appropriate renewable energy source [93]. The generated electricity is used in an alkaline water electrolyzer [114]. Afterwards, it is stored and transported over 400 km to the hydrogen refueling stations to be dispensed to FCEVs (Figure 4). The FCEV is comparable to a Toyota Mirai and has a power of 100 kW. For the future size of the FCEV, i.e. mass of the glider, powertrain etc., the current Mirai is downscaled from the current 114 kW to 100 kW. The future hydrogen consumption of the FCEV is taken from literature [115]. The source for LCA modelling the fuel cell [116] includes not only a model for a current model, but also two models for future fuel cells. The optimistic model for the future fuel cell was chosen for 2050 here. Modelling of the FCEV is mainly based on [117]. The increase of energy density for the included battery is based on expert elicitation [118]. For the costs of FCEV it was assumed, based on literature [119], that FCEV will reach the same level of costs as conventional internal combustion engine vehicles.

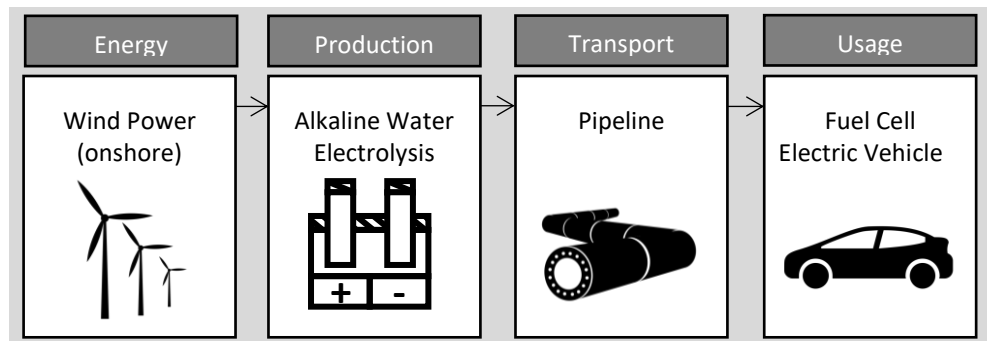


Fig. 4: Case study “Hydrogen from wind for mobility”, icons from [110]

A passenger car is chosen as a use case to investigate green hydrogen, although the supplied hydrogen could also be used in public buses or light duty vehicles. For transport and distribution of hydrogen, different technologies are available. Currently, the most common transport methods are gaseous hydrogen in high-pressure tanks and liquid hydrogen in cryogenic tanks by truck. Alternatively, hydrogen storage and transport in liquid organic hydrogen carriers (LOHCs) by truck is considered. The fourth alternative analyzed is the construction of a new hydrogen pipeline network in Germany. To be not susceptible to wind power fluctuations, the hydrogen needs to be stored, if necessary, for months. Therefore, for gaseous hydrogen seasonal storage in salt caverns is taken into account. Liquid hydrogen, as well as hydrogen in LOHCs, can be stored in appropriate tanks. The most important technical parameters are summarized in [93]. To consider the prospectivity of the hydrogen supply chains, the efficiency of the hydrogen production by electrolysis is increased based on expert elicitation [120] together with the life time of the electrolyzer stacks. The future cost for alkaline electrolyzers are taken from literature [121], discussing current and future costs and upscaling hydrogen production sites. Future costs for electricity including the electricity from wind power are taken from the already mentioned background scenario ENERGY-TRANS [95]. This scenario was also used to perform the economies of scale for the hydrogen refueling stations. Based on the future FCEV mobility, the number of hydrogen refueling stations was calculated. Additionally, it was assumed that the number of hydrogen refueling stations on a global level rises accordingly. As hydrogen refueling stations are traded on the global market these numbers were used for deriving future investment costs. Regarding hydrogen transport, higher efficiencies for liquefaction and costs were assumed based on literature [122]. For the use of the LOHC technology upscaling was applied based on literature [123] as well as for the compression of hydrogen for transport in pipelines and truck trailers [121].

3.3.4. Case study: Batteries for stationary energy storage

For efficient and effective use of installed renewable energy capacities and to cope with the fluctuating solar and wind power production, battery storage technologies are considered. They provide valuable flexibility to facilitate the system integration of renewable energies by, e.g. temporarily avoiding grid expansion investments or congestions in lower voltage level distribution grids. Stationary batteries can also be used for ancillary services, e.g. load levelling, voltage stabilization, and system backup services (see Figure 5). There are several application fields for grid connected batteries where criteria are the same, but priorities can be different depending on the business case. The application field frequency and voltage regulation is an example where only a short storage duration at high power output is required with high cycle life times. In contrast, load leveling requires battery storage systems with longer storage duration where fewer cycles might be needed. However, batteries have to fulfill simultaneously multiple battery performance requirements such as high power, high energy, long life, low cost, excellent safety, and minimal environmental impacts. Nowadays, no battery can meet all of these goals. Making the right decision on a proper battery system for a particular application is often a compromise. The analyses in this paper focus on different Lithium Ion batteries [124, 125]. These technologies are then contrasted to other technologies such as the all-Vandium-redox Flow battery [126], NaNiCl, and the Valve regulated lead acid battery [124], [127]. Detailed information for several business cases and corresponding details on the LCI and techno-economic parameters can be found in the corresponding literature sources [124], [125], [126], [127]. Here, only an overview of the results for Lithium Ion Batteries (LIB), with the highest market share for stationary applications according to [128] (lithium-iron-phosphate (LFP) and nickel-cobalt-manganese-oxide (NMC 811)) is provided. All process steps are assumed to be located in Germany. All prospective considerations for both battery types are provided in the following. Here, no process improvements nor recycling are considered. Additionally, a graphite anode is considered for modelling, which might change completely in 2050, when graphite might potentially be exchanged with Li or Si based anodes. Furthermore, NMC 811 will probably not play a role in 2050, as already e.g. NMC 9 0.6 0.3 is under development [129]. It is hardly possible to estimate how the LIB based systems will look like in 2050 regarding their design (e.g. new cylindrical or pouch cell types with new current collector design etc.), used electrode and electrolyte materials. The electrode material will especially change due to the criticality of used materials such as Nickel, Lithium, and in particular Cobalt [130]. The energy density of LIBs is highly dependent on several factors as e.g. the used electrode materials has a crucial impact on all E-LCA impact categories. Here energy densities for 2020 are considered (0.13 Wh/kg for LFP and 0.16 Wh/kg for NMC 811), whilst for 2050 theoretical values for graphite are used (0.28 and 0.34 Wh/kg for LFP and NMC 811) [131]. However, using Li-metal with a suitable electrolyte could e.g. lead potentially to energy densities of about 400 Wh/kg for LFP and over 500 Wh/kg for NMC. A detailed overview of the LCI can be found in [132] and [133]. The battery costs are based on a bottom-up model (starting from the specific chemistry and the required raw materials) where scale effects resulting from cell production are considered in combination with higher cell energy densities. The considered battery cost is highly dependent on the manufacturing capacity of the viewed production site, location and chemistry and its properties (in particular energy density). Here, a battery cell manufacturing site located in Germany with a throughput of 4 GWh/a for 2020 and 35 GWh/a in 2050 is considered [134].

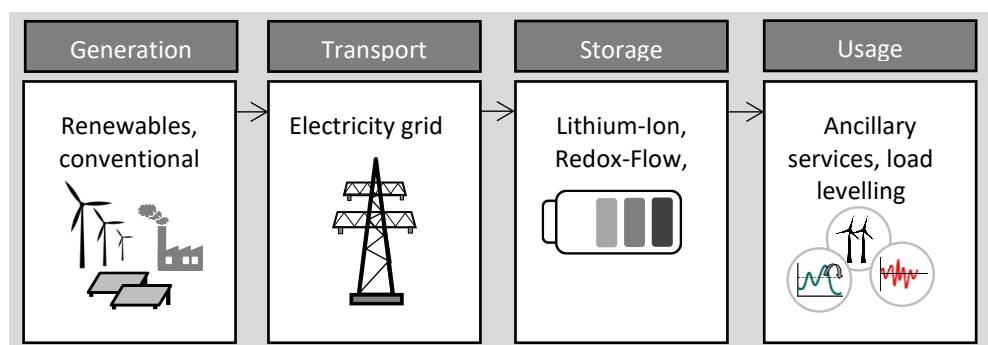


Fig. 5: Case study “Batteries for stationary energy storage”, icons from [110]

4. Results of the case studies assessment with the “ES2050 approach”

The following sub-sections give an overview of the application of the “ES2050 approach” for the three different case studies (for the descriptions of the case studies see section 0, 0, and 0 respectively). This paper focuses on the presentation of the “ES2050 approach” and its applicability to different energy technologies using consistent framework conditions (see section 3) rather than on the comprehensive sustainability assessment of the named technologies. Therefore, assessment results are given exemplarily for the three case studies: Environmental assessment of the case study “Synthetic biofuels for mobility” (section 0), economic assessment of the case study “Hydrogen from wind power for mobility” (section 0), patent growth rate for the case study “Batteries for stationary energy storage” (section 0), acceptance for the case study “Hydrogen from wind power for mobility” (section 4.4), domestic value added for the case study “Synthetic biofuels for mobility” (section 4.5). The results for economic and environmental assessment as well as for patent growth rate of the respective other two case studies can be found in Annex 2.

4.1 Environmental assessment of the case study “Synthetic biofuels for mobility”

As an example for the environmental assessment, the results for the case study “Synthetic biofuels for mobility” are presented (cf. section 3.3.2). The environmental impacts of the production and use of synthetic gasoline from straw (“Straw”) are compared to the environmental impacts of the production and use of fossil gasoline as a reference (“Ref.”). As during biogenic synthetic fuel production, electricity is generated in excess, environmental impacts from the same amount of electricity generation (German electricity production mix 2020 and 2050) are included in the reference process results (“Ref.”). Modelling of production and use of fossil gasoline refers to the ecoinvent datasets “market for petrol, low-sulfur, CH” and “transport, passenger car, large size, petrol, EURO 4, RER”. Ecoinvent datasets for the modelling of synthetic biofuel production and the German electricity production mix are given in [99] and [100]. Figure 6 shows the results for 13 environmental impact categories according to ILCD (cf. section 3.2.1) for the base year 2020. Synthetic biofuel production from straw shows significantly lower impacts (43-77%) for four categories: Climate Change (CC), Eutrophication-Freshwater (Eutr-fw), Ionizing Radiation – human health (IR-hh) and Ozone Depletion (OD). For two more categories, there are also lower impacts for biogenic gasoline, but the differences are smaller: Acidification (Acid) and Particulate matter/Respiratory inorganics (PM) (7-16% lower impacts, respectively). For four categories the emission equivalents are higher for biogenic gasoline

(“Straw”): Eutrophication – marine (Eutr-mar), Eutrophication-terrestrial (Eutr-ter), Human Toxicity – non-cancer effects (HT-nc) and Resource Depletion – mineral, fossils and renewables (RD). For the remaining three categories the impacts are rather equal: Ecotoxicity – freshwater (Ecotox-fw), Human Toxicity – cancer effects (HT-c), and Photochemical Ozone Formation (POF).

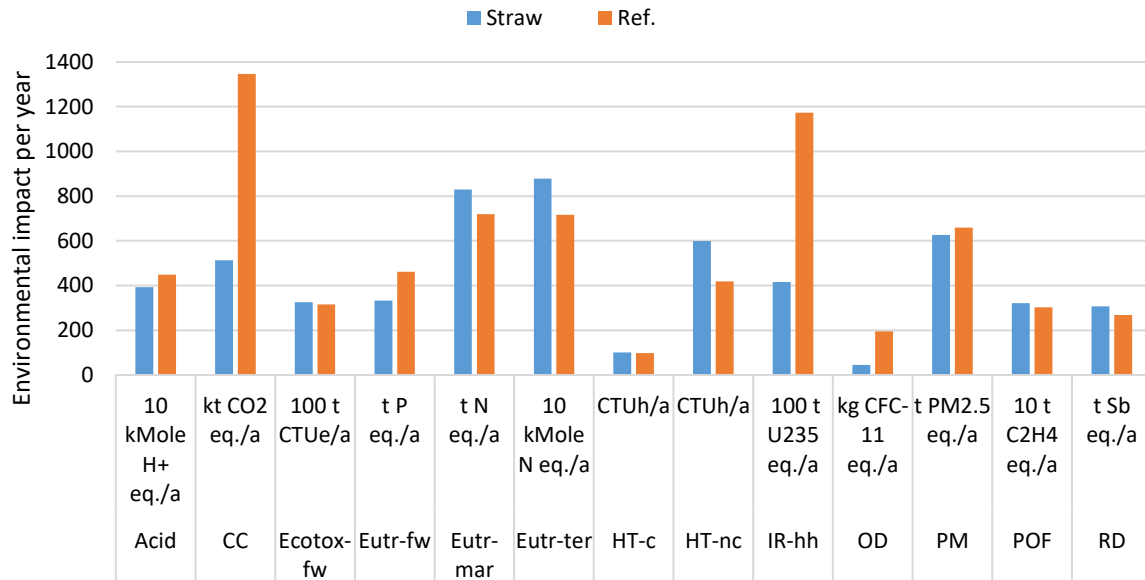


Fig. 6: Comparison of environmental impacts of the production and use of synthetic gasoline from straw (“Straw”) to fossil gasoline (“Ref.”) for the base year 2020; Acid: Acidification, CC: Climate Change, Eutr-fw: Eutrophication freshwater, Eutr-ter: Eutrophication terrestrial, IR-hh: Ionizing radiation - human health, OD: Ozone depletion, PM: Particulate matter/Respiratory inorganics, POF: Photochemical ozone formation, RD: Resource depletion - mineral, fossil and renewable fuels

Figure 7 shows the results for six out of 13 impact categories for the base year 2020 and the future year 2050. The chosen categories show the most significant differences for the base year 2020 (see Figure 6): Climate Change (CC), Eutrophication – freshwater (Eutr-fw), Eutrophication – terrestrial (Eutr-ter), Human Toxicity – non-cancer effects (HT-nc), Ionizing Radiation – human health (IR-hh), Ozone Depletion (OD). In Figure 7, for each impact category and year, the impacts are specified for different sub-processes along the value chain, e.g. “Production of Gasoline conventional” and “Use of Gasoline conventional” (“Ref.”), “Biomass Provision”, “Pyrolysis”, “Gasification” (“Straw”). It has to be noted that the transport of residual straw to the decentralized pyrolysis plants is included in “Biomass Provision” and transport of the biosyncrude from decentralized pyrolysis plants to the central production plant is included in “Gasification”. Emission reductions for the year 2050 arise for biogenic gasoline from assumed emission reductions of agricultural machinery through efficiency enhancements, particle filters for diesel engines (transport of biosyncrude), and increased efficiencies for CHP [100], [99]. Concerning the reference process, assumptions on Germany’s future electricity production mix are causing significantly reduced emission equivalents in the categories CC, Eutr-fw, and IR-hh (most notably through renewable energies replacing nuclear power plants and coal-fired power plants) [62].

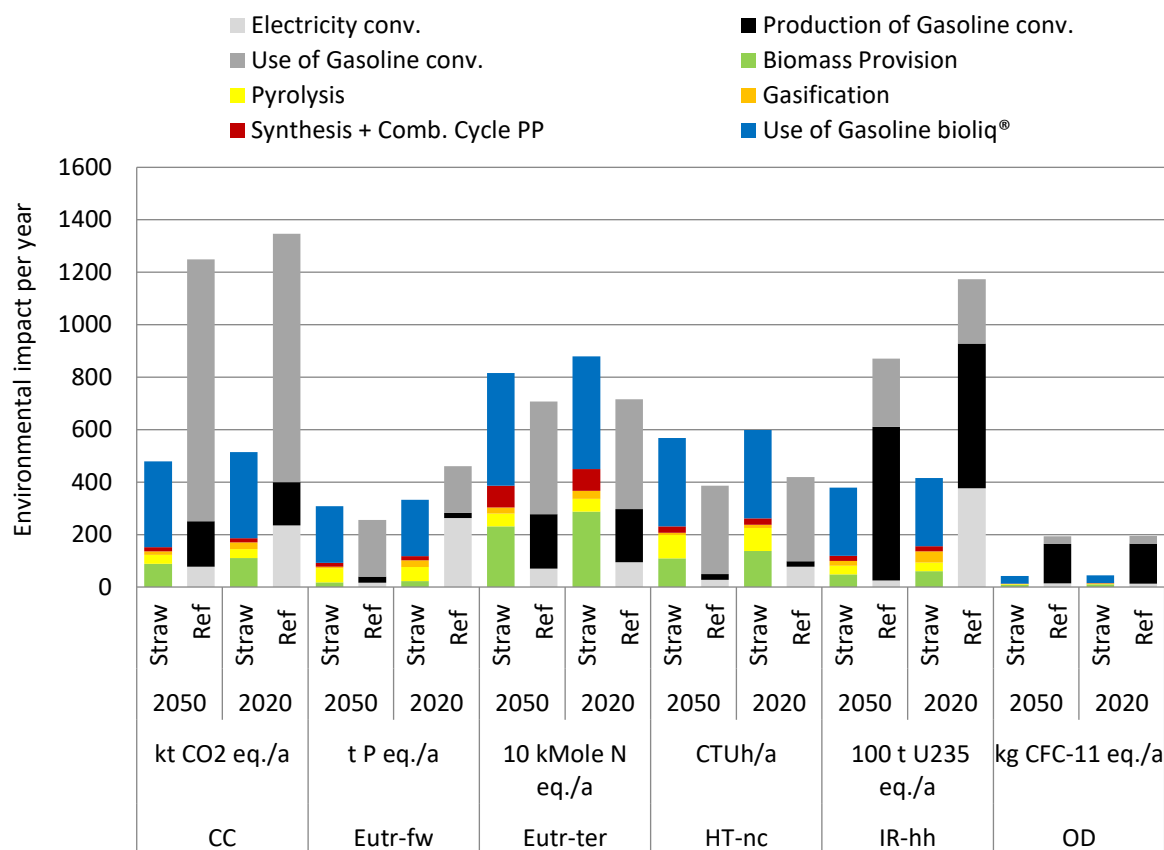


Fig. 7: Comparison of environmental impacts of the production and use of synthetic gasoline from straw ("Straw") to fossil gasoline ("Ref.") for 2020 and 2050; CC: Climate Change, Eutr-ter: Eutrophication terrestrial, IR-hh: Ionizing radiation - human health, PM: Particulate matter/Respiratory inorganics

For biogenic synthetic fuel, most impacts arise from fuel use in a passenger car (production and use) and biomass provision (production and use of agricultural machinery). For Eutrophication terrestrial (Eutr-ter) the contribution of emissions from CHP is comparably high (due to nitrogen oxides emissions).

The advantages of biogenic synthetic fuel over fossil gasoline are most apparent for the impact categories Climate Change (CC) and Ionizing radiation - human health (IR- hh) also for the year 2050. However, reference process emissions are declining due to renewable energies replacing nuclear power plants (especially category IR-hh) and coal-fired power plants (especially category CC) in 2050. For IR-hh, impacts are comparably high for the production of fossil gasoline. This goes back to petroleum production (first of all, carbon-14 emissions during treatment of low-level radioactive waste). For the category CC the advantages of biogenic gasoline mainly arise from the absence of fossil carbon dioxide emissions during fuel use (fuel combustion in a passenger car). For all other impact categories, impacts from fuel use in a passenger car are assumed to be the same for synthetic gasoline and conventional gasoline. For Eutr-ter, environmental impacts are higher for biogenic gasoline compared to fossil gasoline for 2020 and 2050. This goes mainly back to comparably high nitrogen oxides emissions in the course of straw provision from agricultural machinery. Considerable emission reductions for biogenic synthetic fuels could be achieved via emission reductions in the use phase (foremost passenger car production) as well as production and use of agricultural machinery (straw provision).

4.2 Economic assessment of the case study “Hydrogen from wind power for mobility”

As an example for the economic assessment, the case study about hydrogen mobility is shown. As part, the costs for the supply of hydrogen are analyzed. Therefore, the four hydrogen distribution options described in section 0 are compared.

For basic commodities a common data source is chosen (see Annex A 1.2), e.g. electricity generation cost are based on data from the project ENERGY-TRANS [95]. The basis year for the assessments is 2020, for the technology costs and for the money value. So all costs are displayed in €₂₀₂₀.

Fig. 8 displays the hydrogen supply costs for 2020 and 2050 with a discount rate of 2.5 %. For all hydrogen supply options, a significant drop in costs can be observed, particularly for the hydrogen production with alkaline water electrolysis and for the hydrogen refueling stations (dispensation in Fig. 8). The investment costs in 2050 will be lower because the number of systems installed increases and larger capacities are installed (economies of scale). Furthermore, lower costs for electricity generation by wind power can be expected. In the future, the lowest supply costs are realized by the transport by pipeline. However, the costs for hydrogen transport in high-pressure trailers for gaseous hydrogen are only slightly higher and a more detailed assessment is necessary to define the preferable solution. The efforts of liquefying hydrogen or using a LOHC also lead in the future to higher costs than transporting smaller amounts of hydrogen under high-pressure. [93]

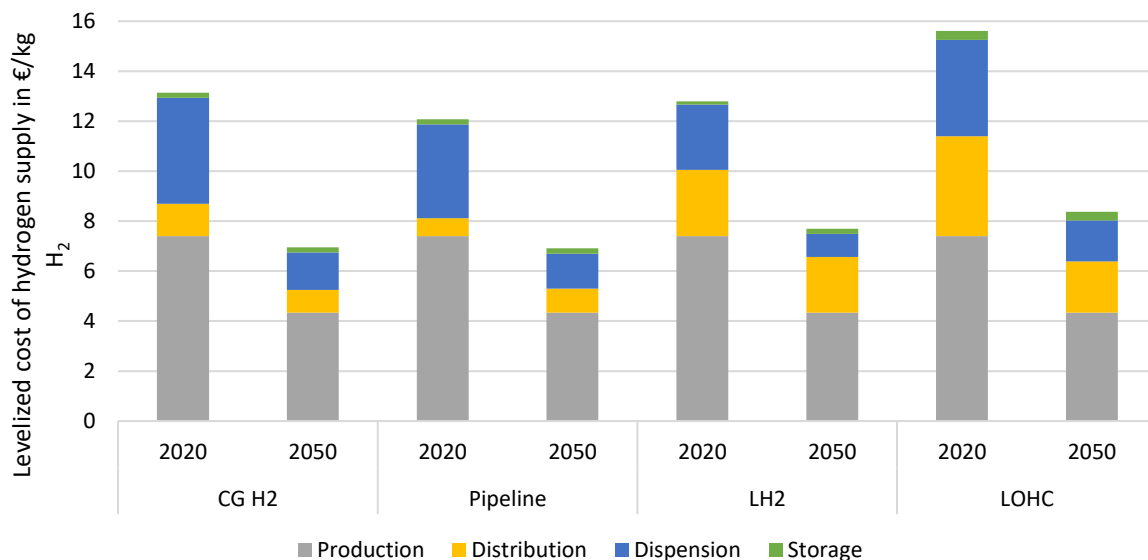


Fig. 8: Comparison of hydrogen supply costs for four different distribution options for 2020 and 2050, macroeconomic perspective; CG: compressed gaseous, L: liquid, LOHC: liquid organic hydrogen carrier

Regarding the cost categories for hydrogen mobility compared with an internal combustion engine vehicle (ICEV) fuelled with gasoline (Fig. 9) the costs for fuel, i.e. hydrogen or gasoline, have the lowest share. With 0.11 €/km capital costs make up the largest portion of the costs for the gasoline vehicle in 2020 and 2050. For the FCEV the capital costs are in the same order of magnitude due to assumptions made. Fuel costs for hydrogen will lower significantly from 2020 to 2050 and will be slightly higher than today's cost for gasoline.

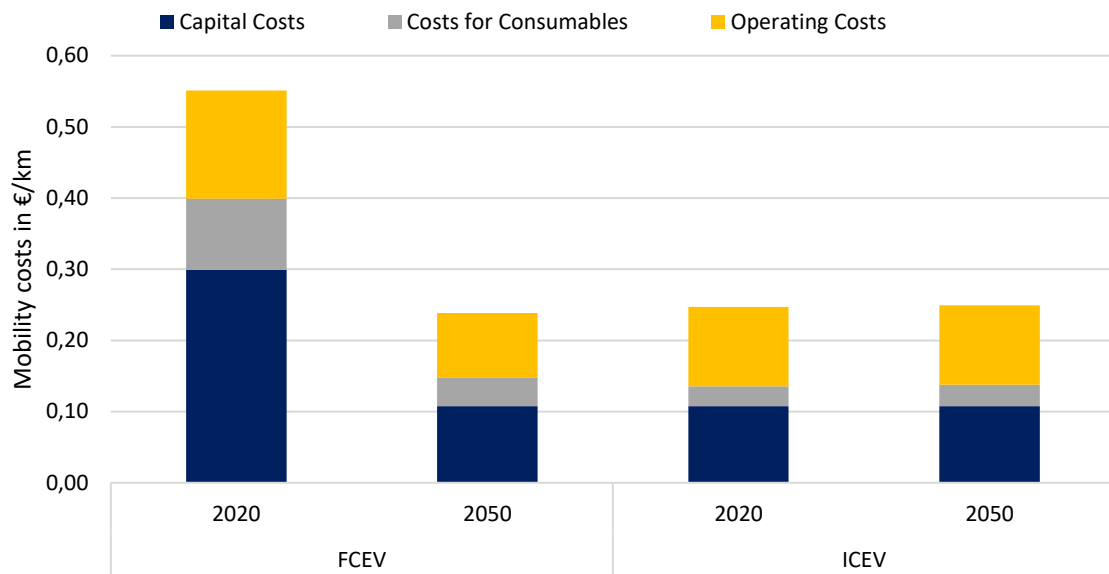


Fig. 9: Comparison of hydrogen (compressed gaseous hydrogen) mobility costs in fuel cell electric vehicles and conventional mobility, regarding the different cost categories, discount rate 2.5%; FCEV: Fuel cell electric vehicle, ICEV: Internal combustion engine vehicle

4.3 Patent analysis on the example of case study “Batteries for stationary energy storage”

From the three different social indicators, here, the results for the indicator “patent growth rate” related to the ICoS sustainability rule “Sustainable development of man-made, human and knowledge capital” (cf. Table 2) are shown for the use case of stationary energy storage. The patent search is carried out for the time period 1995 – 2018 using CPC-codes and keywords and a customized patent crawler combined with a MS Excel template [83]. Used CPC-codes and keywords applied can be found in Baumann et al. [83]. In total, 5.822 patents were found via the EPO-database based on the defined search string used for this assessment (see Table A 2.3.3.1 in Annex A 2.3.3). In contrast to the LCC and E-LCA indicators shown before, it is impossible to predict the future development of patents based on this data, which is analysed in detail in [83]. The MS excel template used [83], analyses the most active countries in the respective technology field and contrasts them to Germany. The y-axis in Figure 10 shows the total patents per year published with the corresponding positive or negative patent growth rate in %. Additionally, the share of the most active countries over time is also provided in the same figure. It can be seen that Japan (JP) has the highest patenting activity so far, followed by China (CN), which is also very active in the area. The United States (US) and Korea (KR) are also rather active in the area with a high amount of patents. Germany, in comparison, has a lower degree of patents in recent years. The analyses of patent growth make it possible to provide a picture of the innovation potential of a technology by depicting the patent growth resulting from positive or negative patent application growth rates. This allows deriving, at least to a certain degree, how strong the technology under assessment contributes to the ICoS rule “Sustainable development of man-made, human and knowledge capital” over the years. The patent growth is based on the assumption that the present rapid growth of patent applications indicates increasing R&D expenditures and a corresponding high future growth potential of the technology. The opposite comes true in the case of low or decreasing patent growth, which might indicate that the technology is entering a maturity phase [86], [84], [83].

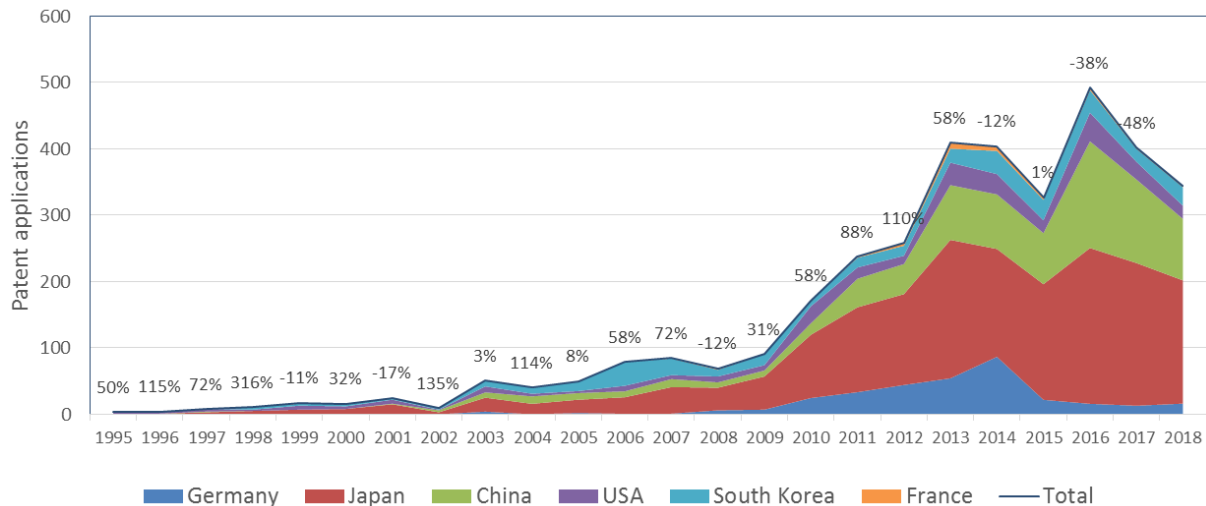


Fig. 10: Yearly patent growth of Li-Ion batteries. The y-axis shows patent applications per country and the percentages refer to the overall patent growth per year (based on [83])

Lithium-Ion batteries can be considered to enter into a maturity phase where patent growth decreases slightly at least until 2018. More information about the patent analysis for the three case studies can be found in [83]. It is worth mentioning that using different search strings and databases can lead to different findings related to patents in the field of batteries, as presented in [135].

4.4 Public acceptance on the example of case study “Hydrogen from wind power for mobility”

The case study “Hydrogen from wind power for mobility” consist of several different technologies, e.g. wind turbines, electrolyzers, FCEV etc. Thus, every technology might be of interest for the discussion of public acceptance. After discussion with technology experts and citizens, it was identified that in this process chain, hydrogen refueling stations are one of the most controversial technologies in the process chain. Not only the users of the FCEV need to accept them, but also the surrounding local community. Furthermore, the area around hydrogen refueling stations is more densely populated than around centralized electrolyzers for hydrogen production. For this reason, here exemplary results of local acceptance for hydrogen refueling stations are discussed. They refer to the statistical pretests - (see section 3.2.3) based on a survey with 211 answers [90]. From these people, 70 were answering the questions regarding hydrogen refueling stations. The others were randomly assigned to the other two case studies.

Participants were first introduced to the technology, which they were to evaluate. The questionnaire continued with a multiple-choice list of seven aspects and a blank text box for further concerns. Furthermore, socio-demographic aspects were asked from the participants. The evaluation of the socio-demographic data of all 211 participants showed that they were predominantly male, aged between 25 and 29 years, had a university degree, were in employment with a higher income and lived in rather rural areas. The 70 participants for the hydrogen refueling station questionnaire, however, were predominantly students.

From the seven presented concerns, the participants regard Explosion Hazard as the most pressing (Fig. 11) followed by Fire Hazard as the second most important concern.

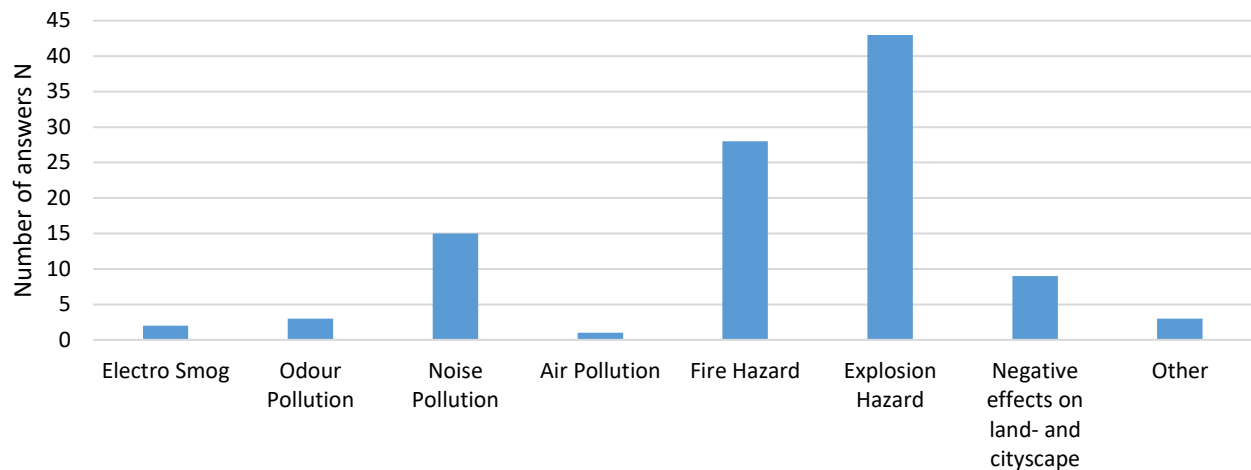


Fig. 11: Citizen concerns about hydrogen refuelling stations, based on [90]

Other concerns of the people did not refer to hydrogen refueling stations itself but to refueling stations in general. This is not only visible in the number of answers for noise pollution and negative effects on land- and cityscape. In fact, a FCEV produces with its fuel cell and electric motor less noise than a conventional vehicle with an internal combustion engine. The submitted comments dealt with the competition to other technologies, e.g. less funding for charging points for battery electric vehicles or the competition for land between food and energy crops. The participants were also asked to state the level of knowledge they had about the technologies. For the hydrogen refueling station, 64 % stated that they had known nothing or only very little about it before the study. This was also reflected in some of the answers. Hydrogen is an odorless gas, which makes odor pollution very unlikely. Additionally, FCEVs' only emission is water so that from them and from a hydrogen refueling station, very little odor pollution can be expected.

4.5. Domestic value added on the example of case study "Synthetic biofuels for mobility"

In this section, exemplary results for domestic value added estimation of synthetic biofuel production from straw are shown and compared to fossil gasoline production. As stated in section 3.2.3, domestic value added estimation is based on results of the economic assessment (see Annex A 2.2.1): Estimations of manufacturing costs of synthetic biofuel production result in about 120 €/cent/l for 2050 (interest rate of 2.5 %, depreciation period 20 a). For fossil gasoline production (Ref.), manufacturing costs of about 46 €/cent/l are calculated for 2050 as average value of gasoline product acquisition costs of the years 2011 to 2020 according to [108]. For domestic value added estimation of synthetic biofuel from straw, all cost components along the value chain, i.e. biomass provision, pyrolysis, gasification, and fuel synthesis, are sub-divided into capital (investment), consumable, and operating costs and percentages of domestic value added are estimated for each cost item. Percentages for domestic value added of different cost items across case studies are given in Table A 1.2.3 in Annex A 1.2. Furthermore, for synthetic biofuel production, for catalyst costs for fuel synthesis, 100 % non-domestic value added are assumed, and for utility costs, 100 % domestic value added. For costs for maintenance and repairs, 80 % domestic and 20 % potentially domestic value added are assumed. Domestic value added estimations of bioliq plant construction (42 % domestic value added, 39% potentially domestic value added, 18% non-domestic value added) is based on in total about 100 single technical components and experiences from the bioliq pilot plant construction at KIT [98]. Furthermore, for costs for purchased equipment installation, measurement and control systems, piping and electrics 50 % domestic value added are assumed. For costs for buildings, site development, engineering services, permits and project management 100 % domestic value added are assumed. For manufacturing costs

of fossil gasoline, a rather rough estimate is made: All costs other than crude oil are assigned to domestic value added. Crude oil costs of 40.2 €/cent/l are calculated for 2050 based on [136] as average value of the years 2011 to 2020 and are assumed to be fully non-domestic. As a result, domestic value added for synthetic biofuel from straw (Straw) accounts for 66 % compared to 13 % for fossil gasoline (Ref.) in 2050 (see Figure 12). Determining factors for this difference are assumptions on raw materials supply for the respective production processes: crude oil is assumed to be fully imported (non-domestic value added) while residual straw for synthetic biofuel production is assumed to be provided domestically (cf. [100]). For the time being, no differentiation of shares for domestic, potentially domestic and non-domestic value added of cost items related to the reference year has been made. Therefore, the total share of domestic value added of synthetic biofuel production differs only slightly for 2020 (67 % domestic value added), assuming the same interest rate and depreciation time for cost estimations (2.5 % and 20 a). Variation of interest rate and depreciation time (8 % and 10 a respectively) results in a reduced total share of domestic value added of 61 % for synthetic biofuel production from straw in 2050 (see Figure 12).

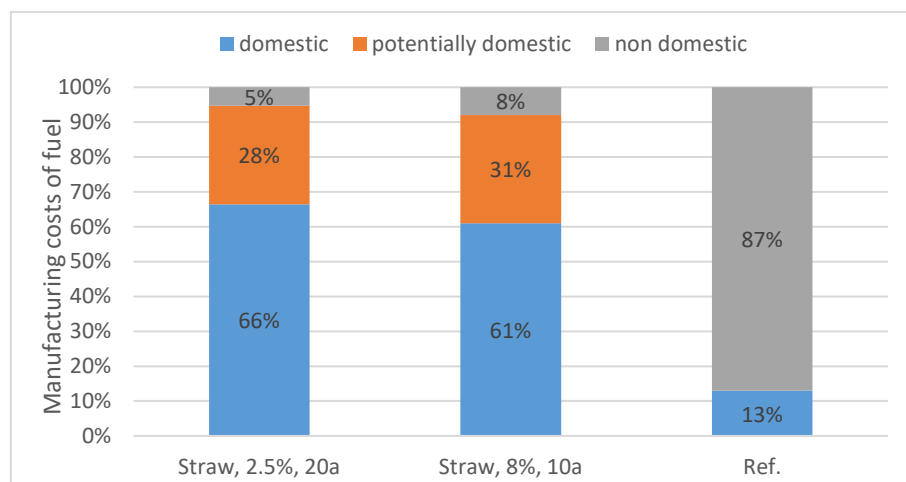


Fig. 12: Shares for domestic value added for production of synthetic biofuel from straw (left and middle) and fossil gasoline (right), reference year 2050

5. Discussion of the “ES2050 approach”

In this section, we reflect on our experiences by applying the “ES2050 approach” to the different case studies to conclude on weaknesses and needs for further development of the assessment concept and chosen indicators, respectively. First, the assessment results are mirroring the chosen system boundaries, spatial and temporal context, input data, allocation methods, reference systems, and other assumptions. Regarding the spatial context, our analyses refer to Germany. However, no specific location analysis was carried out with respect to the implementation of technologies and/or infrastructures, and use of products. Consequently, results may be biased towards determining development strategies or hiding potential indirect economic, environmental, and social effects caused at a regional/local scale where the respective technologies and infrastructures are built, and products will be used.

The prospective environmental and economic assessment based on E-LCA and LCC focuses on aspects that can be analyzed using aggregated quantitative data on inputs (e.g. resources) and outputs (e.g. emissions) from process modeling and databases together with progress rates and future price estimations. To evaluate the respective processes, the modelling results are related to a functional unit and compared with selected conventional references. In the given examples for E-LCA and LCC (Section 4.1 and Section 4.2) the production and use of fossil gasoline (see Fig. 6, Fig. 7, Fig. 9) are used as a reference.

For environmental impact assessment, the ILCD [58] recommended impact categories, methods and indicators are applied, knowing well that other methods and indicators might lead to differing results [137]. Also, neglecting environmental impacts due to poorly developed methods (e.g. land use, water consumption) needs to be reconsidered, as this can lead to important aspects for certain technologies being ignored. On the other hand, a reduction in the number of environmental impact categories could be explored, for example, by finding correlations and overlaps between categories. The uncertainties of the prospective E-LCA approach become evident since changes in the provision of resources, such as biomass, can significantly influence the environmental impacts, resulting in a different evaluation of environmental aspects (see Fig. 7). Also, prospective changes in the reference processes, such as gasoline production, affect the results of the comparative environmental assessment. In 2050, a significant net reduction in GHG emissions and fossil energy demand could be achieved when synthetic biofuel replaces fossil gasoline. If, on the other hand, electricity were chosen as a reference, the prospective overall comparative environmental assessment would change as by 2050, the electricity will be generated mainly from renewable sources. The same pattern and importance of prospectivity are depicted in the economic assessment, discussed here exemplarily for hydrogen supply and mobility costs (Section 4.2). For all hydrogen supply options considered (see Fig. 8 and Fig. 9), the costs become significantly lower and near to competitiveness with fossil fuels in the long term (2050). However, that strongly depends on the general assumption that in the future manufacturing of a fuel cell drive train is as costly as the one of an internal combustion engine. In general, “levelised total costs” is an established indicator and enables a good overview of the microeconomic aspects of a product or service. However, economic sustainability does not only consist of a business perspective and additional macroeconomic indicators might help understand the overall economic dimension of sustainability better.

In contrast to the environmental and economic assessment, a prospective social assessment is even more complex and limited as social indicators are less determined by specific properties of technologies (e.g. type of Li-ion battery, efficiencies, or energy densities) themselves and more dependent on the spatial and temporal context. As a result, prospective social assessment of technologies depends to a large extent on the broader socio-economic development, i.e. environmental legislation and regulation, and the public debate focusing e.g. on grand challenges such as the large scale system integration of renewables. Social acceptance is recognized as a major pushing or constraining factor for energy technologies. This is apparent e.g. in the case of first generation biofuels, which has become a subject of contested debates in Germany and which is reflected by the chosen case study of second generation biofuel produced with lignocellulosic residues only [138], [139], [139, 140], [141]. The selected three social indicators (“patent growth rate”, “domestic value added”, and “acceptance”) of the “ES2050 approach” allow for a first but limited prospective statement on the development in the future. For the indicators “patent growth rate” and “acceptance”, this is merely an extrapolation of current trends, which can change at more or less short notice due to changes in framework conditions.

For the indicator “acceptance”, an argument for or against the use of a specific technology remains the same over time only if there are no significant changes in the evaluation pattern, framework conditions, and public information. An obvious example of this is the change of acceptance of nuclear energy before and after the reactor accident in Fukushima [142], [143]. In addition, the future stability of institutions and companies applying the technology promotes that acceptance can increase in the future since society's trust in them can positively influence the individual acceptance of the respective technology [92]. Also, societal acceptance can increase when people get used to the technology, even if nothing else has changed. Therefore, different surveys would be helpful to evaluate the acceptance of various aspects of the respective technology over time. However, the subject of debate in terms of the assessment of public acceptance is usually the study design (e.g. interviews or questionnaires), questions asked, type of measurement (e.g. quantitative or qualitative), and the interpretation of the results. Yet, the critics on measuring acceptance for being incomparable or incomprehensible and impossible to verify will continue [144]. Nevertheless, the indicator acceptance is crucial to address the social dimension of sustainability, to understand individual perceptions towards new technologies, and to examine the individual's opinions and feelings concerning specific technologies [145], [141]. Beyond the scope of the indicator "acceptance", there are further options to include societal actors and different types of stakeholders for sustainability assessment of emerging technologies. From our point of view, the selection of criteria and indicators and the determination of weighting factors in the frame of multi criteria decision analysis (MCDA) are of particular importance in this context. The indicator “patent growth rate”, which is used to address the innovation potential of technologies, is based on open access data, easy to understand and communicate. The developed crawler and Excel template facilitates measuring [83]. Additionally, this indicator can be used for all types of technologies and for country comparisons in a consistent manner. It is, however, crucial to formulate a proper patent search string using the right classifications to ensure that the right patents are included. Other methodological challenges are also the way of attributing the patents to a country (e.g. by inventor or applicant). Using different search strings as well as patent databases can lead to another picture of patent landscape. The results shown here indicate that Li-ion batteries are considered to enter in their maturity phase, where development is mainly driven by Asian companies from Japan, China and South Korea (Fig. 10). Although we propose to use this indicator and patent data are frequently used also by others as an innovation indicator, the application is discussed controversially because e.g. neither all patents represent innovation nor all innovations are patented [146], [83]. Regarding the prospective assessment approach, the indicator is of limited suitability as within a patent analysis, the more recent years are not considered adequately, because of the processing time of patent applications. For technology forecasting, our approach could be extended by using S-curve analysis (as logistic plots) [147] or by using additional indicators, such as the number and type of start-ups, which are interlinked to the assessed technology [34], since entrepreneurial activity can be seen as an outcome of innovation processes and an initiation of opportunities for new technologies.

Based on (prospective) cost estimations, the indicator “domestic value added” enables a prospective assessment of the respective technology's future domestic job creation potential. Similar to prospective assumptions on prices for cost estimations, assumptions on future domestic, potential domestic and non-domestic value added of cost components can be made. Just as E-LCA and LCC indicators, the indicator “domestic value added” is used comparatively, and the assessment result is therefore strongly dependent on chosen reference processes. Additionally, results are dependent on specific assumptions on future supply chains of e.g. resources, i.e. local delivery of raw materials versus delivery from abroad. It should be noted that choosing domestic value added as an indicator, results in rather conservative estimations as all potential domestic value added is excluded.

It is apparent that for prospective domestic value added assessment, consistent socio-economic context scenarios are needed, assuming settings, e.g. on the future origin of raw materials, supply

chains of operating materials, and locations of product use. Preferably, these context scenarios should be harmonized with underlying context scenarios concerning future electricity and mobility mixes and related prices for E-LCA and LCC, respectively.

Last but not least, although it is common practice in LCSA studies, it has to be kept in mind that a clear separation of economic, environmental, and social impacts is not possible, and related challenges are interconnected [138]. Likewise, the chosen indicators are also not only relevant for one sustainability dimension. This becomes obvious e.g. for “Climate Change”, “Human Toxicity”, assigned in this study to the environmental dimension of sustainability but having likewise several social implications. Also, the assignment of the indicator “patent growth rate” to the social dimension can be questioned, as patents have foremost economic implications, and the social impact can be considered rather secondary. Conversely, levelised total costs do not only have economic implications but ultimately also social implications when it comes to questions of affordability for example. Thus, as to whether and for which purpose an assignment to one of the sustainability dimensions should be made should be subject of further research.

6. Conclusions

The proposed “ES2050 approach” for prospective sustainability assessment of energy technologies combines well established environmental and economic indicators with social indicators derived from the integrative concept of sustainable development. The presented approach is generically applicable to all types of technologies, i.e. different energy resources and conversion processes, aiming at a consistent prospective sustainability assessment of (emerging) energy technologies. Therefore, the “ES2050 approach” can be used to consistently highlight possible strengths and weaknesses as well as unintended consequences of new technologies in comparison to e.g. existing conventional technologies, aiming at supporting technology developers, decision-makers in politics, industry, and society with the provision of knowledge for further evaluation, steering, and governance. This also includes the possibility of integrating the indicators into an MCDA. The presented results provide an excellent starting point for further analyses with respect to a comparison of different transport options and are used for comparative sustainability assessment of fuel cell electric vehicles, battery electric vehicles, and internal combustion engine vehicles fuelled with synthetic biofuel and fossil fuel respectively. Such research is already in development [148]. Nevertheless, the approach presented is considered rather a starting point than a blueprint for the comprehensive assessment of renewable energy technologies, especially for the suggested social indicators, their significance for prospective assessments and their embedding in context scenarios for prospective assessments. This also includes the further exploitation of opportunities for the involvement of different actors from society to the overall assessment approach, e.g. for selection and weighting of sustainability criteria and indicators. Also, the derivation of indicators based on a normative concept of sustainable development and the purpose of assignment of indicators to one of the sustainability dimensions, i.e. economy, environment, social, must be examined more closely and is subject to further research. Last but not least, prospective assessments are afflicted with different types of uncertainties, methodical uncertainties as well as uncertainties with respect to the input data, and further research efforts need to be undertaken in order to consider these uncertainties systematically.

Abbreviations

Acidification	Acid
Capital Expenditures	CAPEX
Switzerland	CH
Climate Change	CC
Combined Heat and Power	CHP
China	CN
Cooperative Patent Classification	CPC
Germany	DE
Ecotoxicity – freshwater	Ecotox-fw
End Of Life Expenditures	EOLEX
Eutrophication – Freshwater	Eutr-fw
Eutrophication – marine	Eutr-mar
Eutrophication – terrestrial	Eutr-ter
Environmental Life Cycle Assessment	E-LCA
ES2050	“Energy System 2050”
European Patent Office	EPO
Fuel Cell Electric Vehicle	FCEV
Gross Domestic Product	GDP
Worldwide	GLO
Human Toxicity – cancer effects	HT-c
Human Toxicity – non-cancer effects	HT-nc
Internal Combustion Engine Vehicle	ICEV
Integrative Concept of Sustainable Development	ICoS
Ionizing Radiation – human health	IR-hh
International Organisation for Standardisation	ISO
Japan	JP
Korea	KR
Life cycle assessment	LCA

Life Cycle Costing	LCC
Life Cycle Inventory	LCI
Life Cycle Impact Assessment	LCIA
Life Cycle Sustainability Assessment	LCSA
Lithium Ion Battery	LIB
Lithium-Iron-Phosphate	LFP
Liquid Organic Hydrogen Carriers	LOHCs
Levelized Total Costs	LTC
Multi Criteria Decision Analysis	MCDA
Millennium Development Goals	MDGs
Nickel-Cobalt-Manganese-Oxide	NMC
Ozone Depletion	OD
Operational Expenditures	OPEX
Open Patent Service	OPS
Particulate matter/Respiratory inorganics	PM
Photochemical Ozone Formation	POF
Resource Depletion – mineral, fossils and renewables	RD
Europe	RER
Research and Development	R&D
Sustainable Development Goals	SDGs
Sustainability Indicator System	SIS
Social Life cycle assessment	S-LCA
Total Costs	TC
Total Costs of Ownership	TCO
United States	US

Declarations

Ethics approval and consent to participate

Not applicable

Consent for publication

Not applicable

Availability of data and materials

All data generated or analysed during this study are included in this published article and its supplementary information files.

Competing interests

The authors declare that they have no competing interests

Funding

The Helmholtz Association supported this work under the Joint Initiative “Energy System 2050 – A Contribution of the Research Field Energy”. This work contributed to the research performed at CELEST (Center for Electrochemical Energy Storage Ulm-Karlsruhe) and was partly funded by the German Research Foundation (DFG) under Project ID 390874152 (POLIS Cluster of Excellence).

Authors' contributions

All authors designed the concept, objectives and methods of the study and contributed to developing the „ES2050 approach“. MH and CR drafted the work. MH analyzed the case study “synthetic biofuels for mobility” and was a major contributor in writing all parts of the manuscript. CW analyzed the case study “hydrogen from wind power for mobility” and contributed to writing the manuscript, particularly the parts state-of-the-art, methods and results. MB analyzed the case study “batteries for stationary energy storage” and contributed to writing the manuscript, particularly the parts methods and results. CR contributed to writing the draft manuscript, particularly the parts background, state-of-the-art, methods, discussion and conclusion. TN, MW, PZ substantively revised the work. All authors read and approved the final manuscript.

Acknowledgments

The authors wish to thank all researchers of the Helmholtz Initiative who have supported this work in several ways. Special thanks for fruitful discussions and valuable remarks go to Jens Buchgeister (KIT), Sonja Simon and Tobias Junne (DLR), and Gerald van den Boogart (HZDR).

References

- [1] IRENA, Global energy transformation: A Roadmap to 2050 (2019 edition), International Renewable Energy Agency Abu Dhabi, 2019.
- [2] European Commission, MITTEILUNG DER KOMMISSION AN DAS EUROPÄISCHE PARLAMENT, DEN RAT, DEN EUROPÄISCHEN WIRTSCHAFTS-UND SOZIALAUSSCHUSS UND DEN AUSSCHUSS DER REGIONEN - Der europäische Grüne Deal, Brüssel, 2019.
- [3] Agora Energiewende, Understanding the Energiewende. FAQ on the ongoing transition of the German power system, 2015.

- [4] E. Santoyo-Castelazo, A. Azapagic, Sustainability assessment of energy systems: integrating environmental, economic and social aspects, *Journal of Cleaner Production* 80 (2014) 119-138.
- [5] S. Hadian, K. Madani, A system of systems approach to energy sustainability assessment: Are all renewables really green?, *Ecological Indicators* 52 (2015) 194-206.
- [6] C. Wulf, J. Werker, C. Ball, P. Zapp, W. Kuckshinrichs, Review of Sustainability Assessment Approaches Based on Life Cycles, *Sustainability* 11(20) (2019) 5717.
- [7] F. Ribeiro, P. Ferreira, M. Araújo, A.C. Braga, Modelling perception and attitudes towards renewable energy technologies, *Renewable Energy* 122 (2018) 688-697.
- [8] L. Andes, Methodensammlung zur Nachhaltigkeitsbewertung - Grundlagen, Indikatoren, Hilfsmittel, Karlsruhe Institute of Technology, Karlsruhe, 2019.
- [9] R.T. Fauzi, P. Lavoie, L. Sorelli, M.D. Heidari, B. Amor, Exploring the Current Challenges and Opportunities of Life Cycle Sustainability Assessment, *Sustainability* 11(3) (2019) 636.
- [10] D. Costa, P. Quinteiro, A. Dias, A systematic review of life cycle sustainability assessment: Current state, methodological challenges, and implementation issues, *Science of the total environment* 686 (2019) 774-787.
- [11] M. Collotta, P. Champagne, G. Tomasoni, M. Alberti, L. Busi, W. Mabee, Critical indicators of sustainability for biofuels: An analysis through a life cycle sustainability assessment perspective, *Renewable and Sustainable Energy Reviews* 115 (2019) 109358.
- [12] B. Hedelin, Complexity is no excuse, *Sustainability Science* 14(3) (2019) 733-749.
- [13] T. Hák, S. Janoušková, B. Moldan, Sustainable Development Goals: A need for relevant indicators, *Ecological indicators* 60 (2016) 565-573.
- [14] Helmholtz Association, Energy System 2050 - A Contribution of the Research Field Energy, https://www.helmholtz.de/en/research/energy/energy_system_2050/structure/, 2019.
- [15] IEA, Germany 2020 Energy Policy Review, International Energy Agency, https://www.bmwi.de/Redaktion/DE/Downloads/G/germany-2020-energy-policy-review.pdf?__blob=publicationFile&v=4, 2020.
- [16] European Parliament, Directive (EU) 2018/2001 of the European Parliament and of the Council of 11 December 2018 on the promotion of the use of energy from renewable sources, *Official Journal of the European Union*, 2018, pp. 82-209.
- [17] Federal Ministry for Economic Affairs and Energy, Our energy transition for an energy supply that is secure, clean, and affordable, <https://www.bmwi.de/Redaktion/EN/Dossier/energy-transition.html>, 2019.
- [18] J. Tremmel, "Nachhaltigkeit"-definiert nach einem kriteriengebundenen Verfahren, *GAIA-Ecological Perspectives for Science and Society* 13(1) (2004) 26-34.
- [19] W. Kloeppfer, Life cycle sustainability assessment of products, *The International Journal of Life Cycle Assessment* 13(2) (2008) 89.
- [20] United Nations Economic and Social Council, Report of the Inter-agency and Expert Group on Sustainable Development Goal Indicators, 2016.
- [21] UN, The Millennium Development Goals Report, United Nations, New York, 2015.
- [22] C. Wulf, J. Werker, P. Zapp, A. Schreiber, H. Schlör, W. Kuckshinrichs, Sustainable Development Goals as a Guideline for Indicator Selection in Life Cycle Sustainability Assessment, *Procedia CIRP* 69 (2018) 59-65.
- [23] G. Büyükoçkan, Y. Karabulut, E. Mukul, A novel renewable energy selection model for United Nations' sustainable development goals, *Energy* 165 (2018) 290-302.
- [24] N. AlQattan, M. Acheampong, F.M. Jaward, F.C. Ertem, N. Vijayakumar, T. Bello, Reviewing the potential of Waste-to-Energy (WTE) technologies for Sustainable Development Goal (SDG) numbers seven and eleven, *Renewable Energy Focus* 27 (2018) 97-110.
- [25] J. Kopfmüller, V. Brandl, J. Jörissen, M. Paetau, G. Banse, R. Coenen, A. Grunwald, Nachhaltige Entwicklung integrativ betrachtet: Konstitutive Elemente, Regeln, Indikatoren, edition sigma Berlin 2001.

- [26] J. Kopfmüller, Das integrative Konzept nachhaltiger Entwicklung: Motivation, Architektur, Perspektiven, Ein Konzept auf dem Prüfstand, Nomos Verlagsgesellschaft mbH & Co. KG, 2006, pp. 23-40.
- [27] United Nations, Our common future. Report of the World Commission on Environment and Development, 1987.
- [28] United Nations, Rio declaration on environment and development, (1992).
- [29] United Nations, Agenda 21. Action Plan of the United Nations with regard to sustainable development, (1992).
- [30] C. Rösch, K.-R. Bräutigam, J. Kopfmüller, V. Stelzer, P. Lichtner, Indicator system for the sustainability assessment of the German energy system and its transition, *Energy, Sustainability and Society* 7(1) (2017).
- [31] J. Kopfmüller, H. Lehn, H. Nuißl, K. Krellenberg, D. Heinrichs, Sustainable development of megacities: An integrative research approach for the case of Santiago Metropolitan Region, *Die Erde* 140(4) (2010) 417-448.
- [32] M. Fuss, R.T.V. Barros, W.-R. Poganietz, Designing a framework for municipal solid waste management towards sustainability in emerging economy countries-An application to a case study in Belo Horizonte (Brazil), *Journal of Cleaner Production* 178 (2018) 655-664.
- [33] S. Nayono, A. Lehmann, J. Kopfmüller, H. Lehn, Improving sustainability by technology assessment and systems analysis: the case of IWRM Indonesia, *Applied Water Science* 6(3) (2016) 279-292.
- [34] C. Rösch, K.-R. Bräutigam, J. Kopfmüller, V. Stelzer, A. Fricke, Sustainability assessment of the German energy transition, *Energy, Sustainability and Society* 8(1) (2018) 12.
- [35] J. Guinée, Life Cycle Sustainability Assessment: What Is It and What Are Its Challenges?, in: R. Clift, A. Druckman (Eds.), *Taking Stock of Industrial Ecology*, Springer International Publishing, Cham, 2016, pp. 45-68.
- [36] W. Klöpffer, Life-Cycle based methods for sustainable product development, *The International Journal of Life Cycle Assessment* 8(3) (2003) 157-159.
- [37] W. Klöpffer, Life cycle sustainability assessment of products, *The International Journal of Life Cycle Assessment* 13(2) (2008) 89-95.
- [38] M. Finkbeiner, E.M. Schau, A. Lehmann, M. Traverso, Towards Life Cycle Sustainability Assessment, *Sustainability* 2(10) (2010) 3309-3322.
- [39] D. Costa, P. Quinteiro, A.C. Dias, A systematic review of life cycle sustainability assessment: Current state, methodological challenges, and implementation issues, *Science of The Total Environment* 686 (2019) 774-787.
- [40] S.M. Moni, R. Mahmud, K. High, M. Carbajales-Dale, Life cycle assessment of emerging technologies: A review, *Journal of Industrial Ecology* 24(1) (2020) 52-63.
- [41] G. Zhao, E.R. Nielsen, E. Troncoso, K. Hyde, J.S. Romeo, M. Diderich, Life cycle cost analysis: A case study of hydrogen energy application on the Orkney Islands, *International Journal of Hydrogen Energy* 44(19) (2019) 9517-9528.
- [42] I. Muñoz, F. Portillo, S. Rosiek, F.J. Batlles, J. Martínez-Del-Río, I. Acasuso, V. Piergrossi, M. De Sanctis, S. Chimienti, C. Di Iaconi, Prospective environmental and economic assessment of solar-assisted thermal energy recovery from wastewater through a sequencing batch biofilter granular reactor, *Journal of Cleaner Production* 212 (2019) 1300-1309.
- [43] R. Arvidsson, A.M. Tillman, B.A. Sandén, M. Janssen, A. Nordelöf, D. Kushnir, S. Molander, Environmental assessment of emerging technologies: recommendations for prospective LCA, *Journal of Industrial Ecology* 22(6) (2018) 1286-1294.
- [44] A.C. Hetherington, A.L. Borrión, O.G. Griffiths, M.C. McManus, Use of LCA as a development tool within early research: challenges and issues across different sectors, *The International Journal of Life Cycle Assessment* 19(1) (2014) 130-143.
- [45] G. Sandin, G. Clancy, S. Heimersson, G.M. Peters, M. Svanström, M. Ten Hoeve, Making the most of LCA in technical inter-organisational R&D projects, *Journal of Cleaner Production* 70 (2014) 97-104.

- [46] B.M. Zimmermann, H. Dura, M.J. Baumann, M.R. Weil, Prospective time-resolved LCA of fully electric supercap vehicles in Germany, *Integrated environmental assessment and management* 11(3) (2015) 425-434.
- [47] N. Thonemann, A. Schulte, D. Maga, How to conduct prospective life cycle assessment for emerging technologies? A systematic review and methodological guidance, *Sustainability* 12(3) (2020) 1192.
- [48] A. Mendoza Beltran, B. Cox, C. Mutel, D.P. van Vuuren, D. Font Vivanco, S. Deetman, O.Y. Edelenbosch, J. Guinée, A. Tukker, When the background matters: using scenarios from integrated assessment models in prospective life cycle assessment, *Journal of Industrial Ecology* 24(1) (2020) 64-79.
- [49] T. Junne, M. Saiger, J. Buchgeister, S. Simon, T. Naegler, Integrating future background scenarios for prospective LCA - method and case study on the German energy system. Poster Abstracts, WE120 pp. 307, SETAC Europe 29th Annual Meeting, Helsinki, Finland, 2019.
- [50] I. Bhat, R. Prakash, LCA of renewable energy for electricity generation systems—a review, *Renewable and sustainable energy reviews* 13(5) (2009) 1067-1073.
- [51] M. Hiremath, K. Derendorf, T. Vogt, Comparative life cycle assessment of battery storage systems for stationary applications, *Environmental science & technology* 49(8) (2015) 4825-4833.
- [52] K.B. Sunde, A.; Solberg, B.; , Environmental impacts and costs of woody biomass-to-liquid (BTL) production and use—a review, *Forest Policy and Economics* 13(8) (2011) 591-602.
- [53] A. Mehmeti, A. Angelis-Dimakis, G. Arampatzis, S. McPhail, S. Ulgiati, Life Cycle Assessment and Water Footprint of Hydrogen Production Methods: From Conventional to Emerging Technologies, *Environments* 5(2) (2018) 24.
- [54] DIN Standards Committee Principles of Environmental Protection, Environmental management – Life cycle assessment – Principles and framework (ISO 14040:2006), DIN German Institute for Standardization, 2006.
- [55] DIN Standards Committee Principles of Environmental Protection, Environmental management – Life cycle assessment – Requirements and guidelines (ISO 14044:2006), DIN German Institute for Standardization, 2006.
- [56] J.B. Guinée, E. Lindeijer, Handbook on life cycle assessment: operational guide to the ISO standards, Springer Science & Business Media 2002.
- [57] M. Goedkoop, R. Heijungs, M. Huijbregts, A. De Schryver, J. Struijs, R. Van Zelm, ReCiPe 2008, A life cycle impact assessment method which comprises harmonised category indicators at the midpoint and the endpoint level 1 (2009) 1-126.
- [58] M. Hausschild, M. Goedkoop, J. Guinée, R. Heijungs, M. Huijbregts, O. Mollet, M. Margni, A. de Schryver, International Reference Life Cycle Data System (ILCD) Handbook - Recommendations for Life Cycle Impact Assessment in the European context based on existing environmental impact assessment models and factors, Publications Office of the European Union, 2011.
- [59] GreenDelta, openLCA, GreenDelta GmbH, Berlin, 2018.
- [60] ifu Hamburg, umberto, ifu Hamburg, 2020.
- [61] sphaera, GaBi, sphaera, 2020.
- [62] Swiss Centre for Life Cycle Inventories, Ecoinvent Database version 3.3, Zurich, 2016.
- [63] Verein Deutscher Ingenieure, Beschaffung, Betrieb und Instandhaltung von Produktionsmitteln unter Anwendung von Life Cycle Costing (LCC), VDI 2884, 2005.
- [64] T.E. Swarr, D. Hunkeler, W. Klöpffer, H.-L. Pesonen, A. Ciroth, A.C. Brent, R. Pagan, Environmental life-cycle costing: a code of practice, Springer, 2011.
- [65] P. Code, DEPENDABILITY MANAGEMENT PART 3-3: APPLICATION GUIDE-LIFE CYCLE COSTING (IEC 60300-3-3: 2004), (2004).
- [66] VDI, Purchase, operating and maintenance of production equipment using Life Cycle Costing (LCC) (VDI 2884), 2005.
- [67] V. Mytilinou, A.J. Kolios, Techno-economic optimisation of offshore wind farms based on life cycle cost analysis on the UK, *Renewable Energy* 132 (2019) 439-454.

- [68] M.S. Peters, K.D. Timmerhaus, R.E. West, *Plant Design and Economics for Chemical Engineers*, McGraw-Hill, University of Colorado, 2004.
- [69] M. Lauer, *Methodology guideline on techno economic assessment (TEA)*, Workshop WP3B Economics, Methodology Guideline, 2008.
- [70] C. Kost, S. Shammugam, V. Jülch, H.-T. Nguyen, T. Schlegl, *Stromgestehungskosten Erneuerbare Energien*, Fraunhofer Institut für solare Energiesysteme (ISE), Freiburg, Germany, 2018.
- [71] V. PowerTech eV, *Levelised Cost of Electricity (LCOE 2015)*, (2015).
- [72] A. Jørgensen, A. Le Bocq, L. Nazarkina, M. Hauschild, *Methodologies for social life cycle assessment*, *The international journal of life cycle assessment* 13(2) (2008) 96.
- [73] C.B. Norris, *Data for social LCA*, Springer, 2014.
- [74] UNEP, *Guidelines for Social Life Cycle Assessment of Products and Organizations 2020*, in: C. Benoît Norris, M. Traverso, S. Neugebauer, E. Ekener, T. Schaubroeck, S. Russo Garrido, M. Berger, S. Valdivia, A. Lehmann, M. Finkbeiner, G. Arcese (Eds.) *United Nations Environment Programme (UNEP)*, Paris, 2020.
- [75] A. Lehmann, E. Zschieschang, M. Traverso, M. Finkbeiner, L. Schebek, *Social aspects for sustainability assessment of technologies—challenges for social life cycle assessment (SLCA)*, *The International Journal of Life Cycle Assessment* 18(8) (2013) 1581-1592.
- [76] E.H. Ekener-Petersen, Jonas; Finnveden, Göran, *Screening potential social impacts of fossil fuels and biofuels for vehicles*, *Energy Policy* 73 (2014) 416-426.
- [77] C. Wulf, P. Zapp, A. Schreiber, J. Marx, H. Schlör, *Lessons learned from a life cycle sustainability assessment of rare earth permanent magnets*, *Journal of Industrial Ecology* 21(6) (2017) 1578-1590.
- [78] N.C. Onat, M. Kucukvar, A. Halog, S. Cloutier, *Systems thinking for life cycle sustainability assessment: A review of recent developments, applications, and future perspectives*, *Sustainability* 9(5) (2017) 706.
- [79] A. Zamagni, H.-L. Pesonen, T. Swarr, *From LCA to Life Cycle Sustainability Assessment: concept, practice and future directions*, *The international journal of life cycle assessment* 18(9) (2013) 1637-1641.
- [80] Deutsche Bundesbank, *Time series BBK01.WZ3449: Term structure of interest rates on listed Federal securities (method by Svensson) / residual maturity of 20.0 years / end of month 2017*. http://www.bundesbank.de/Navigation/EN/Statistics/Time_series_databases/Macro_economic_time_series/its_details_value_node.html?listId=www_skms_it03a&tsId=BBK01.WZ3449. (Accessed 15.9.2017).
- [81] B.L. Basberg, *Patents and the measurement of technological change: a survey of the literature*, *Research policy* 16(2-4) (1987) 131-141.
- [82] G. Song, *python-epo-ops-client 2.3.2,* 15-Jan-2018. [Online]. Available: <https://pypi.org/project/python-epo-ops-client/>. 2018.
- [83] M. Baumann, T. Domnik, M. Haase, C. Wulf, P. Emmerich, C. Rösch, P. Zapp, T. Naegler, M. Weil, *Comparative patent analysis for the identification of global research trends for the case of battery storage, hydrogen and bioenergy*, *Technological Forecasting and Social Change* 165 (2021) 120505.
- [84] H. Ernst, *Patent information for strategic technology management*, *World patent information* 25(3) (2003) 233-242.
- [85] R. Blundell, R. Griffith, J. Van Reenen, *Market share, market value and innovation in a panel of British manufacturing firms*, *The Review of Economic Studies* 66(3) (1999) 529-554.
- [86] K. Lee, S. Lee, *Patterns of technological innovation and evolution in the energy sector: A patent-based approach*, *Energy Policy* 59 (2013) 415-432.
- [87] Renewable Energy Agency, *Acceptance of renewable energy in Germany 2019* (<https://www.unendlich-viel-energie.de/english/acceptance-of-renewable-energy-in-germany-2019>), 2021.
- [88] N.M. Huijts, E.J. Molin, B. van Wee, *Hydrogen fuel station acceptance: A structural equation model based on the technology acceptance framework*, *Journal of Environmental Psychology* 38 (2014) 153-166.

- [89] E. Miguel, C. Oltra, Hyacinth: Report on Methodologies and factors, Cidaut; Ciemat, Valladolid, 2016.
- [90] P. Emmerich, M. Weil, M. Baumann, Citizen concerns and acceptance for novel energy technologies, IET Working Papers Series, IET/CICS.NOVA, Innovation and Technology Studies pole at FCT-UNL, Centro Interdisciplinar de Ciências Sociais, Faculdade de Ciências e Tecnologia, Universidade Nova de Lisboa, Monte de Caparica, 2019.
- [91] SoSci Survey GmbH, <https://www.soscisurvey.de/>, München.
- [92] P. Emmerich, A.-G. Hülemeier, D. Jendryczko, M.J. Baumann, M. Weil, D. Baur, Public acceptance of emerging energy technologies in context of the German energy transition, *Energy Policy* 142 (2020) 111516.
- [93] C. Wulf, P. Zapp, Sustainability Assessment of Innovative Energy Technologies – Hydrogen from Wind Power as a Fuel for Mobility Applications, *Journal of Sustainable Development of Energy, Water and Environment Systems* 9(3) (2021).
- [94] A. Mönning, C. Schneemann, E. Weber, G. Zika, R. Helmrich, Elektromobilität 2035 - Effekte auf Wirtschaft und Erwerbstätigkeit durch die Elektrifizierung des Antriebsstrangs von Personenkraftwagen, IAB Forschungsbericht, Institut für Arbeitsmarkt und Berufsforschung, Nürnberg, 2018.
- [95] T. Pregger, T. Naegler, W. Weimer-Jehle, S. Prehofer, W. Hauser, Moving towards socio-technical scenarios of the German energy transition—lessons learned from integrated energy scenario building, *Climatic Change* 162(4) (2020) 1743-1762.
- [96] J. Ahmad, M. Imran, A. Khalid, W. Iqbal, S.R. Ashraf, M. Adnan, S.F. Ali, K.S. Khokhar, Techno economic analysis of a wind-photovoltaic-biomass hybrid renewable energy system for rural electrification: A case study of Kallar Kahar, *Energy* 148 (2018) 208-234.
- [97] E. Henrich, N. Dahmen, E. Dinjus, J. Sauer, The role of biomass in a future world without fossil fuels, *Chemie Ingenieur Technik* 87(12) (2015) 1667-1685.
- [98] N. Dahmen, J. Abeln, M. Eberhard, T. Kolb, H. Leibold, J. Sauer, D. Stapf, B. Zimmerlin, The bioliq process for producing synthetic transportation fuels, *Wiley Interdisciplinary Reviews: Energy and Environment* 6(3) (2017).
- [99] M. Haase, C. Rösch, Life Cycle Assessment of the Thermochemical Conversion of Biomass for the Production of Fuel, Electricity and Heat, in: *ETA-Florence Renewable Energies (Hrsg.): Proceedings of the 26th European Biomass Conference and Exhibition, Copenhagen, Denmark, 14.-17.05.2018. Florence, Italy: ETA-Florence Renewable Energies 2018, publ. online, pp. 1450-1457, DOI: 10.5071/26thEUBCE2018-4BV.6.6, 2018.*
- [100] M. Haase, C. Rösch, Sustainability assessment of innovative energy technologies - Integrated biomass-based production of fuel, electricity and heat, in: *ETA-Florence Renewable Energies (Hrsg.): Proceedings of the 27th European Biomass Conference and Exhibition, Lisbon, Portugal, 27.-30.05.2019. Florenz, Italien: ETA-Florence Renewable Energies 2019, publ. online, S. 1642-1653., (2019).*
- [101] A. Brosowski, D. Thrän, U. Mantau, B. Mahro, G. Erdmann, P. Adler, W. Stinner, G. Reinhold, T. Hering, C. Blanke, A review of biomass potential and current utilisation—Status quo for 93 biogenic wastes and residues in Germany, *Biomass and Bioenergy* 95 (2016) 257-272.
- [102] A. Brosowski, P. Adler, G. Erdmann, W. Stinner, D. Thrän, U. Mantau, Biomassepotenziale von Rest-und Abfallstoffen, Status Quo in Deutschland. Gülzow-Prüzen: Fachagentur Nachwachsende Rohstoffe eV (FNR)(Schriftenreihe nachwachsende Rohstoffe, 36), zuletzt geprüft am 19 (2015) 2018.
- [103] G.O. Kappler, Systemanalytische Untersuchung zum Aufkommen und zur Bereitstellung von energetisch nutzbarem Reststroh und Waldrestholz in Baden-Württemberg—eine auf das Karlsruher bioliq®-Konzept ausgerichtete Standortanalyse—, 2007.
- [104] F. Berning, CO₂ - nicht nur der Motor macht's, *top agrar* 7 (2013).
- [105] P. Viebahn, J. Nitsch, M. Fischedick, A. Esken, D. Schüwer, N. Supersberger, U. Zuberbühler, O. Edenhofer, Comparison of carbon capture and storage with renewable energy technologies regarding structural, economic, and ecological aspects in Germany, *International Journal of Greenhouse Gas Control* 1(1) (2007) 121-133.

- [106] Kuratorium für Technik und Bauwesen in der Landwirtschaft e. V. (KTBL), KTBL-Feldarbeitsrechner, <https://daten.ktbl.de/feldarbeit/entry.html>, 2020.
- [107] L. Leible, S. Kälber, G. Kappler, Systemanalyse zur Gaserzeugung aus Biomasse Untersuchung ausgewählter Aspekte: Biomasseaufkommen und -bereitstellung, Biomasseeinspeisung in einen Druckvergaser, Verfahrensvergleich der FT- und Methanolproduktion, KIT Scientific Publishing Karlsruhe, 2011.
- [108] Mineralöl Wirtschaftsverband e.v. (MWV), Zusammensetzung des Verbraucherpreises für Superbenzin. Available from: <https://www.mwv.de/statistiken/preiszusammensetzung/> (last accessed February 12, 2020), 2020.
- [109] ADAC, Automarken & Modelle, ADAC, https://www.adac.de/rund-ums-fahrzeug/autokatalog/marken-modelle/?filter=ONLY_RECENT&sort=SORTING_DESC, 2021.
- [110] Noun Project, Icons licenced by Creative Commons CCBY: bales of hay by Tomasz Pasternak from the Noun Project, tractor and trailer by Dan Ensor from the Noun Project, factory by Norbert Kucsera from the Noun Project, landscape by Becris from the Noun Project, tank car by Vectors Market from the Noun Project, railroad by Ataur Rahman from the Noun Project, factory by Creative Stall from the Noun Project, van by Mourad Mokrane from the Noun Project, plug by Gregor Cresnar from the Noun Project, industry by ProSymbols from the Noun Project, The Noun Project, Culver City, 2019.
- [111] C. Wulf, P. Zapp, A. Schreiber, Review of Power-to-X Demonstration Projects in Europe, *Frontiers in Energy Research* 8(191) (2020).
- [112] D.G. Caglayan, N. Weber, H.U. Heinrichs, J. Linßen, M. Robinius, P.A. Kukla, D. Stolten, Technical potential of salt caverns for hydrogen storage in Europe, *International Journal of Hydrogen Energy* 45(11) (2020) 6793-6805.
- [113] C. Wulf, M. Kaltschmitt, Hydrogen supply chains for mobility—environmental and economic assessment, *Sustainability* 10(6) (2018) 1699.
- [114] J.C. Koj, C. Wulf, A. Schreiber, P. Zapp, Site-dependent environmental impacts of industrial hydrogen production by alkaline water electrolysis, *Energies* 10(7) (2017) 860.
- [115] M. Robinius, Strom- und Gasmarktdesign zur Versorgung des deutschen Straßenverkehrs mit Wasserstoff, PhD thesis Institute of Energy and Climate Research (IEK-3), RWTH Aachen, Jülich, 2015.
- [116] M. Miotti, J. Hofer, C. Bauer, Integrated environmental and economic assessment of current and future fuel cell vehicles, *The International Journal of Life Cycle Assessment* 22(1) (2017) 94-110.
- [117] A. Benitez, C. Wulf, A. de Palmenaer, M. Lengersdorf, T. Röding, T. Grube, M. Robinius, D. Stolten, W. Kuckshinrichs, Ecological assessment of fuel cell electric vehicles with special focus on type IV carbon fiber hydrogen tank, *Journal of cleaner production* 278 (2021) 123277.
- [118] J.F. Peters, M. Baumann, B. Zimmermann, J. Braun, M. Weil, The environmental impact of Li-Ion batteries and the role of key parameters – A review, *Renewable and Sustainable Energy Reviews* 67 (2017) 491-506.
- [119] FEV, Impact of fuel cell technology on the machinery and component supplier industry, FEV Consulting, Aachen, 2020.
- [120] O. Schmidt, A. Gambhir, I. Staffell, A. Hawkes, J. Nelson, S. Few, Future cost and performance of water electrolysis: An expert elicitation study, *International Journal of Hydrogen Energy* 42(52) (2017) 30470-30492.
- [121] C. Noack, F. Burggraf, S. Hosseiny, P. Lettenmeier, S. Kolb, S. Belz, J. Kallo, A. Friedrich, T. Pregger, K.K. Cao, D. Heide, T. Naegler, F. Borggreffe, U. Bünger, J. Michalski, T. Raksha, C. Vogelstätter, T. Smolinka, F. Crotochino, S. Donadei, P.-L. Horvath, G.-S. Schneider, Studie über die Planung einer Demonstrationsanlage zur Wasserstoff-Kraftstoffgewinnung durch Elektrolyse mit Zwischenspeicherung in Salzkavernen unter Druck, German Aerospace Center (DLR), Stuttgart, 2015.
- [122] K. Stolzenburg, R. Mubbala, Hydrogen Liquefaction Report - Whole Chain Assessment, Integrated Design for Demonstration of Efficient Liquefaction of Hydrogen (IDEALHY), Fuel Cells and Hydrogen Joint Undertaking (FCH JU), Brussels, 2013.
- [123] HySTOCK, A preliminary feasibility study, VTT Technical Research Centre of Finland, Espoo, 2020.

- [124] M. Baumann, J. Peters, M. Weil, A. Grunwald, CO₂ Footprint and Life-Cycle Costs of Electrochemical Energy Storage for Stationary Grid Applications, *Energy Technology* 5(7) (2017) 1071-1083.
- [125] H. Hottenroth, J. Peters, M. Baumann, T. Viere, I. Tietze, Life-cycle Analysis for Assessing Environmental Impact, *Energy Storage Options and Their Environmental Impact* 46 (2018) 261.
- [126] S. Weber, J.F. Peters, M. Baumann, M. Weil, Life cycle assessment of a vanadium redox flow battery, *Environmental science & technology* 52(18) (2018) 10864-10873.
- [127] M. Baumann, J. Peters, M. Weil, Exploratory Multicriteria Decision Analysis of Utility-Scale Battery Storage Technologies for Multiple Grid Services Based on Life-Cycle Approaches, *Energy Technology* (2019) 1901019.
- [128] Wood Mackenzie, LFP to overtake NMC as dominant stationary storage chemistry by 2030, News Release, <https://www.woodmac.com/press-releases/lfp-to-overtake-nmc-as-dominant-stationary-storage-chemistry-by-2030/>, 2021.
- [129] S.-H. Lee, S. Lee, B.-S. Jin, H.-S. Kim, Optimized electrochemical performance of Ni rich LiNi_{0.91}Co_{0.06}Mn_{0.03}O₂ cathodes for high-energy lithium ion batteries, *Scientific reports* 9(1) (2019) 1-7.
- [130] M. Weil, J. Peters, M. Baumann, Stationary battery systems: Future challenges regarding resources, recycling, and sustainability, *The Material Basis of Energy Transitions*, Elsevier2020, pp. 71-89.
- [131] F. Wu, J. Maier, Y. Yu, Guidelines and trends for next-generation rechargeable lithium and lithium-ion batteries, *Chemical Society Reviews* 49(5) (2020) 1569-1614.
- [132] J.F. Peters, M. Weil, Providing a common base for life cycle assessments of Li-Ion batteries, *Journal of Cleaner Production* 171 (2018) 704-713.
- [133] M. Mohr, J.F. Peters, M. Baumann, M. Weil, Toward a cell-chemistry specific life cycle assessment of lithium-ion battery recycling processes, *Journal of Industrial Ecology* 24(6) (2020) 1310-1322.
- [134] H. Ersoy, M. Baumann, M. Weil, Evaluation Study of Regional Added Value Creation by Lithium-ion Battery Energy Storage (BES) towards 2050, Vortrag gehalten auf Energy Transition and Sustainability Conference (APEEN 2021), Online, 20.–21. Januar 2021, 2021.
- [135] IEA, Innovation in batteries and electricity storage - A global analysis based on patent data, International Energy Agency, 2020.
- [136] Statista, Preisentwicklung ausgewählter OPEC-Rohöle in den Jahren 1960 bis 2021 <https://de.statista.com/statistik/daten/studie/810/umfrage/rohoelpreisentwicklung-opec-seit-1960/>, 2021.
- [137] C. Bueno, M.Z. Hauschild, J.A. Rossignolo, A.R. Ometto, N.C. Mendes, Sensitivity analysis of the use of Life Cycle Impact Assessment methods: a case study on building materials, *Journal of Cleaner Production* 112 (2016) 2208-2220.
- [138] A. Mohr, S. Raman, Lessons from first generation biofuels and implications for the sustainability appraisal of second generation biofuels, *Energy policy* 63 (2013) 114-122.
- [139] S.L. Stattman, A. Gupta, L. Partzsch, P. Oosterveer, Toward sustainable biofuels in the European Union? Lessons from a decade of hybrid biofuel governance, *Sustainability* 10(11) (2018) 4111.
- [140] J. Tomei, R. Helliwell, Food versus fuel? Going beyond biofuels, *Land use policy* 56 (2016) 320-326.
- [141] H.-C. Chin, W.-W. Choong, S.R.W. Alwi, A.H. Mohammed, Issues of social acceptance on biofuel development, *Journal of cleaner production* 71 (2014) 30-39.
- [142] Y. Kim, M. Kim, W. Kim, Effect of the Fukushima nuclear disaster on global public acceptance of nuclear energy, *Energy Policy* 61 (2013) 822-828.
- [143] S. Wang, J. Wang, S. Lin, J. Li, How and when does information publicity affect public acceptance of nuclear energy?, *Energy* 198 (2020) 117290.
- [144] E. Diner, E. Suh, Subjective well-being: an integrated perspective, *Annual review of gerontology and gerontology and geriatrics*. New York: Springer (1997).
- [145] H. Cantril, Pattern of human concerns, (1965).
- [146] S. Nagaoka, K. Motohashi, A. Goto, Patent statistics as an innovation indicator, *Handbook of the Economics of Innovation*, Elsevier2010, pp. 1083-1127.

- [147] M. Dehghani Madvar, A. Aslani, M.H. Ahmadi, N.S. Karbalaie Ghomi, Current status and future forecasting of biofuels technology development, *International Journal of Energy Research* 43(3) (2019) 1142-1160.
- [148] M. Haase, C. Wulf, M. Baumann, H. Ersoy, J.C. Koj, F. Harzendorf, L.S. Mesa Estrada, Multi criteria decision analysis for prospective sustainability assessment of alternative technologies and fuels for individual motorized transport, *UNDER REVISION at Clean Technologies and Environmental Policy* (2022).
- [149] AGEb, Stromerzeugung nach Energieträgern 1990 - 2020 (Stand Februar 2021), Arbeitsgemeinschaft Energiebilanzen, <https://www.ag-energiebilanzen.de/>, 2021.
- [150] Statista, Inflationsrate in Deutschland von 1992 bis 2020 <https://de.statista.com/statistik/daten/studie/1046/umfrage/inflationsrate-veraenderung-des-verbraucherpreisindexes-zum-vorjahr/>, 2021.
- [151] Statista, Börsenstrompreis am EPEX-Spotmarkt für Deutschland/Luxemburg von Januar 2020 bis Januar 2021 <https://de.statista.com/statistik/daten/studie/289437/umfrage/strompreis-am-epex-spotmarkt/>, 2021.
- [152] BDEW, BDEW-Strompreisanalyse Januar 2021, Bundesverband der Energie- und Wasserwirtschaft, https://www.bdew.de/media/documents/BDEW-Strompreisanalyse_no_halbjaehrlich_Ba_online_28012021.pdf, 2021.
- [153] Statista, Gaspreis nach Verbrauchergruppen in Deutschland in den Jahren 2010 bis 2020 <https://de.statista.com/statistik/daten/studie/154961/umfrage/gaspreis-nach-verbrauchergruppe-seit-2006/>, 2021.
- [154] H. Ersoy, M. Baumann, M. Weil, Evaluation Study of Regional Added Value Creation by Lithium-ion Battery Energy Storage (BES) towards 2050., *Energy Transition and Sustainability Conference (APEEN 2021)*, Online, 20.–21. Januar 2021, 2021.

Annex 1

A 1.1 Integrated Concept of Sustainable Development (ICoS) and Sustainability Indicator System (SIS)

Table A 1.1.1: Goals and Substantial Rules of the Integrated Concept of Sustainable Development (ICoS) [25], [30]

Goals	Securing human existence	Maintaining society's productive potential	Preserving society's options for development and action
Substantial rules	1. Protection of human health	6. Sustainable use of renewable resources	11. Equal access for all to information
	2. Satisfaction of basic needs	7. Sustainable use of non-renewable resources	12. Participation in societal decision-making processes
	3. Autonomous subsistence based on income from own work	8. Sustainable use of the environment as a sink for waste and emissions	13. Conservation of cultural heritage and cultural diversity
	4. Just distribution of opportunities to use natural resources	9. Avoidance of technical risks with potentially catastrophic impacts	14. Conservation of the cultural function of nature

	5. Reduction of extreme income and wealth inequality	10. Sustainable development of man-made, human and knowledge capital	15. Conservation of social resources
--	--	--	--------------------------------------

Table A 1.1.2: Sustainability indicators from Sustainability Indicator System (SIS) related to ICoS sustainability rules „Sustainable development of man-made, human and knowledge capital“ and „Conservation of social resources“ [30]

ICoS rule	SIS Sustainability indicators
10. Sustainable development of man-made, human and knowledge capital	25. Installed capacity of renewable energy power plants 26. Number of university graduates in the field of energy sciences 27. Federal expenditures for energy research 28. Number of German patents in the field of renewable energy and energy efficiency 29. Number of start-ups in the renewable energy and energy efficiency sector 30. Added value creation from the renewable energy sector 31. Added value creation from energy efficiency measures in households
15. Conservation of social resources	35. Acceptance of renewable energies in the neighbourhood 36. Acceptance of grid extension for achieving 100% renewable energy supply

A 1.2 Consistent assessment framework

Table A 1.2.1 Share on gross power generation per energy carrier based on [149] and [95] and technology shares per energy carrier based on [95] and [62]

Energy Carrier	Shares on gross power generation [%]		Technology	Technology share per energy carrier		
	2020 [149]	2050 [95]		2020 [%]	2050 [%]	Source
Hard coal	7.8	1.4	Electricity	83.7	22.7	[95]
			CHP	16.3	77.3	
Lignite	16.9	0.0	Electricity	95.8	90.0	[95]
			CHP	4.2	10.0	
Mineral Oil, Diesel	0.8	0.2	Electricity	41.5	100.0	[95]
			CHP	58.5	0.0	
Natural Gas	16.9	20.3	CHP	89.5	59.6	[95]
			Electricity GuD	7.1	35.3	
			Electricity	3.3	5.1	
Nuclear	11.8	0	pressure water	78.7	n.a.	[62]
			boiling water	21.3	n.a.	
Hydro-power	3.4	4.4	run-of-river	84.0	84.0	[62]
			reservoir	16.0	16.0	
Wind onshore	19.7	24.6	1 – 3 MW	100.0	100.0	ES2050
Wind offshore	5.1	21.5	1 – 3 MW	100.0	100.0	[62]

Biomass	8.2	12.6	Biogas	57.9	50.0	[95]
			Wood/solid Biomass	42.1	50.0	
PV	9.4	11.6	Open ground	4.4	4.5	[95]
			Rooftop	95.6	95.5	
Geothermal	0	3.3	Deep geothermal	100.0	100.0	[62]

Table A 1.2.2 Consistent economic input data for 2020 and 2050, inflation rate based on [150]

		2020		2050		Unit
		€2020	Source	€2020	Source	
Electricity	Wholesale electricity price (EPEX spot market, average Jan 20 – Dec 20)	30.6	[151]	112.5	[95] €2011	€/MWh
	Industrial consumers, Mix DE (energy-intensive industry)	50.6	[152]	119.0	[95] €2011	€/MWh
	Industrial consumers, wind onshore (energy-intensive industry)	79.7	Based on [70], [152], [95]	63.5	[95] €2011	€/MWh
	Households, Mix DE, without tax	246.8	[152]	287.2	[95] €2011	€/MWh
	Households, wind onshore, without tax	258.8	Based on [70] [152] BDEW, [95]	231.8	[95] €2011	€/MWh
Natural gas	Industry/Power Plants; excl. tax	7.02	[153]	18.8	[95] €2010	€/GJ
		25.3		67.52		€/MWh
Crude Oil	Average value of the last ten years (2011-2020)	40.2	[136]	40.2	[136]	Cent/l

Table A 1.2.3 Consistent input data for domestic value added estimation: percentages for domestic (d), potentially domestic (p-d) and non-domestic (n-d) value added based on own estimations

		d	p-d	n-d
Capital costs (investment)	All machinery, if not stated differently (e.g. agricultural machinery, trucks, trains)	0	100	0
Consumable costs	Diesel fuel	66	0	34
	Electricity (mix DE)	33	33	33
	Electricity (wind offshore)	73	8	19
	Natural gas	0	0	100
Operating costs	Personnel	100	0	0
	Taxes and insurance, overhead	100	0	0

Annex 2

A 2.1 Results for environmental assessment

A 2.1.1 Case study “Synthetic biofuels for mobility”

The following tables refer to the case study described in section 3.3.2 and the results presented in Figure 6 and Figure 7 (gasoline from straw – “Straw”, fossil gasoline – “Reference”) of section 4.1. Additionally, results are given for gasoline from wood (“Wood”). For the alternative “Wood”, only raw materials supply is altered, while mass and energy flows of biomass conversion are kept constant. Wood supply refers to residual forest wood. Details on modeling of material and energy flows of the biomass conversion as well as on upstream (e.g. biomass provision) and downstream processes (e.g. fuel use in passenger car) of synthetic biofuel production as well as on reference processes can be found in [100] and [99].

Table A 2.1.1.1 Environmental impacts per year of the production and use of synthetic gasoline (gasoline from straw “Straw”, gasoline from wood – “Wood”) and fossil gasoline (“Reference”)

		Straw		Wood		Reference	
		2020	2050	2020	2050	2020	2050
Acidification	molc H+ eq	3.93E+06	3.74E+06	3.35E+06	3.30E+06	4.49E+06	4.40E+06
Climate change	kg CO2 eq	5.14E+08	4.79E+08	4.54E+08	4.38E+08	1.35E+09	1.25E+09
Freshwater ecotoxicity	CTUe	3.25E+10	3.23E+10	3.20E+10	3.19E+10	3.15E+10	3.06E+10
Freshwater eutrophication	kg P eq	3.33E+05	3.09E+05	3.14E+05	2.94E+05	4.61E+05	2.56E+05
Human toxicity – carcinogenics	CTUh	1.01E+02	9.84E+01	9.52E+01	9.38E+01	9.83E+01	8.59E+01
Human toxicity – non-carcinogenics	CTUh	5.99E+02	5.68E+02	4.66E+02	4.63E+02	4.19E+02	3.86E+02
Ionizing radiation – human health	kBq U235 eq	4.16E+07	3.79E+07	3.92E+07	3.63E+07	1.17E+08	8.71E+07
Marine eutrophication	kg N eq	8.30E+05	7.67E+05	6.50E+05	6.34E+05	7.19E+05	6.64E+05
Ozone depletion	kg CFC-11 eq	4.48E+01	4.27E+01	4.35E+01	4.21E+01	1.95E+02	1.94E+02
Particulate matter/Respiratory inorganics	kg PM2.5 eq	6.26E+05	6.08E+05	5.66E+05	5.62E+05	6.59E+05	6.61E+05
Photochemical ozone formation	kg NMVOC eq	3.22E+06	3.03E+06	3.19E+06	2.69E+06	3.03E+06	3.00E+06
Resource depletion – mineral, fossil and renewable	kg Sb eq	3.08E+05	3.05E+05	2.96E+05	2.96E+05	2.69E+05	2.70E+05
Terrestrial eutrophication	molc N eq	8.79E+06	8.15E+06	6.75E+06	6.62E+06	7.16E+06	7.07E+06

Table A 2.1.1.2 Percentage contributions of the process steps to environmental impacts – “Straw”

			Biomass Provision	Pyrolysis	Gasification	Synthesis + Comb. Cycle	Gasoline Use
Acidification	molc H+ eq	2020	21.0	11.1	2.8	6.0	59.1
		2050	17.6	11.7	2.3	6.3	62.1
Climate change	kg CO2 eq	2020	21.6	6.6	5.0	3.1	63.7
		2050	18.4	7.1	2.8	3.4	68.3
Freshwater ecotoxicity	CTUe	2020	2.1	6.1	1.1	1.7	89.0
		2050	1.7	6.2	0.8	1.7	89.7
Freshwater eutrophication	kg P eq	2020	6.7	16.2	7.8	4.5	64.8
		2050	5.8	17.5	1.9	4.8	70.0
Human toxicity – carcinogenics	CTUh	2020	7.1	10.0	4.3	3.1	75.5
		2050	5.8	10.3	3.1	3.2	77.6
Human toxicity – non-carcinogenics	CTUh	2020	22.9	14.7	2.1	4.1	56.3
		2050	19.3	15.5	1.5	4.3	59.3
Ionizing radiation – human health	kBq U235 eq	2020	14.7	7.7	10.3	4.8	62.5
		2050	12.8	8.5	4.8	5.3	68.6
Marine eutrophication	kg N eq	2020	32.0	5.5	3.9	9.2	49.4
		2050	27.8	6.0	2.9	9.9	53.5
Ozone depletion	kg CFC-11 eq	2020	23.2	4.3	4.5	2.7	65.3
		2050	19.6	4.6	4.4	2.8	68.6
Particulate matter/Respiratory inorganics	kg PM2.5 eq	2020	13.3	7.9	1.8	2.8	74.2
		2050	10.9	8.1	1.7	2.9	76.4
Photochemical ozone formation	kg NMVOC eq	2020	26.7	4.2	2.6	7.1	59.4
		2050	22.7	4.4	2.2	7.5	63.1
Resource depletion – mineral, fossil and renewable	kg Sb eq	2020	4.3	8.1	0.3	2.1	85.2
		2050	3.5	8.2	0.4	2.1	85.9
Terrestrial eutrophication	molc N eq	2020	32.8	5.6	3.4	9.4	48.8
		2050	28.3	6.0	2.9	10.1	52.6

Table A 2.1.1.3 Percentage contributions of the process steps to environmental impacts – “Wood”

			Biomass Provision	Pyrolysis	Gasification	Synthesis + Comb. Cycle	Gasoline Use
Acidification	molc H+ eq	2020	7.2	13.1	3.3	7.0	69.5
		2050	6.4	13.3	2.8	7.1	70.4
Climate change	kg CO2 eq	2020	11.2	7.5	5.6	3.6	72.1
		2050	10.7	7.8	3.1	3.7	74.8
Freshwater ecotoxicity	CTUe	2020	0.5	6.2	1.1	1.7	90.5
		2050	0.5	6.2	0.8	1.7	90.8
Freshwater eutrophication	kg P eq	2020	1.1	17.2	8.3	4.7	68.7
		2050	1.1	18.4	2.0	5.1	73.5
Human toxicity – carcinogenics	CTUh	2020	1.3	10.6	4.5	3.3	80.3
		2050	1.2	10.8	3.2	3.3	81.5
Human toxicity – non-carcinogenics	CTUh	2020	1.0	18.9	2.7	5.2	72.2
		2050	1.0	19.1	1.9	5.3	72.8
Ionizing radiation – human health	kBq U235 eq	2020	9.5	8.2	10.9	5.1	66.3
		2050	8.8	8.9	5.1	5.5	71.7
Marine eutrophication	kg N eq	2020	13.2	7.1	4.9	11.7	63.0
		2050	12.1	7.3	4.0	12.0	64.6
Ozone depletion	kg CFC-11 eq	2020	20.8	4.5	4.6	2.8	67.3
		2050	18.5	4.6	4.5	2.8	69.5
Particulate matter/Respiratory inorganics	kg PM2.5 eq	2020	4.1	8.7	2.0	3.1	82.2
		2050	3.7	8.8	1.8	3.1	82.7
Photochemical ozone formation	kg NMVOC eq	2020	25.9	4.2	2.7	7.2	60.0
		2050	12.4	5.0	2.9	8.5	71.2
Resource depletion – mineral, fossil and renewable	kg Sb eq	2020	0.6	8.4	0.4	2.2	88.5
		2050	0.6	8.4	0.4	2.2	88.4
Terrestrial eutrophication	molc N eq	2020	12.5	7.2	4.5	12.2	63.6
		2050	11.1	7.4	4.2	12.5	64.8

Table A 2.1.1.4 Percentage contributions of the process steps to environmental impacts – “Reference”

			Electricity production	Gasoline production	Gasoline Use
Acidification	molc H+ eq	2020	8.2	40.1	51.7
		2050	6.3	40.9	52.8
Climate change	kg CO2 eq	2020	13.0	12.8	74.1
		2050	6.3	13.8	79.9
Freshwater ecotoxicity	CTUe	2020	6.5	1.6	91.9
		2050	3.6	1.6	94.7
Freshwater eutrophication	kg P eq	2020	48.2	5.0	46.8
		2050	6.5	9.1	84.4
Human toxicity – carcinogenics	CTUh	2020	16.9	5.3	77.7
		2050	5.0	6.1	89.0
Human toxicity – non-carcinogenics	CTUh	2020	14.5	5.1	80.3
		2050	7.2	5.6	87.2
Ionizing radiation – human health	kBq U235 eq	2020	28.0	49.8	22.1
		2050	2.9	67.2	29.9
Marine eutrophication	kg N eq	2020	16.3	26.7	57.0
		2050	9.4	28.9	61.7
Ozone depletion	kg CFC-11 eq	2020	7.6	77.4	15.0
		2050	7.1	77.8	15.1
Particulate matter/Respiratory inorganics	kg PM2.5 eq	2020	4.5	25.0	70.5
		2050	4.8	24.9	70.3
Photochemical ozone formation	kg NMVOC eq	2020	7.1	29.7	63.2
		2050	6.2	30.0	63.8
Resource depletion – mineral, fossil and renewable	kg Sb eq	2020	1.0	1.4	97.6
		2050	1.5	1.4	97.2
Terrestrial eutrophication	molc N eq	2020	11.0	29.1	59.9
		2050	9.9	29.4	60.7

A 2.1.2 Case study “Hydrogen from wind power for mobility”

The following tables refer to the case study described in section 3.3.3. The results of the hydrogen production pathways are based on [93]. The reference year has been updated from 2015 to 2020. For electricity mix composition data presented in A 1.2 (Table A 1.2.1) have been used. Other technical data have been checked and updated, e.g. by [123] for the LOHC technology. Modelling of the FCEV is mainly based on [117].

Table A 2.1.2.1 Environmental impacts per kg of hydrogen different distribution options for 2020 and 2050

		CGH2		Pipeline		LH2		LOHC	
		2020	2050	2020	2050	2020	2050	2020	2050
Acidification	molc H+ eq	2.82E-02	2.70E-02	1.94E-02	1.75E-02	2.99E-02	2.18E-02	2.87E-02	2.94E-02
Climate change	kg CO2 eq	5.08E+00	4.23E+00	2.99E+00	1.85E+00	6.85E+00	2.96E+00	7.38E+00	6.51E+00
Freshwater ecotoxicity	CTUe	1.79E+02	1.56E+02	1.68E+02	1.42E+02	2.20E+02	1.62E+02	1.95E+02	1.66E+02
Freshwater eutrophication	kg P eq	3.05E-03	1.43E-03	3.10E-03	1.03E-03	7.13E-03	1.24E-03	5.02E-03	1.48E-03
Human toxicity – cancer effects	CTUh	8.30E-07	6.67E-07	7.89E-07	5.98E-07	1.13E-06	6.62E-07	9.47E-07	6.95E-07
Human toxicity – non-cancer effects	CTUh	2.72E-06	2.31E-06	2.18E-06	1.67E-06	3.59E-06	2.15E-06	2.85E-06	2.40E-06
Ionizing radiation – human health	kBq U235 eq	5.98E-01	3.65E-01	3.95E-01	9.41E-02	1.05E+00	1.71E-01	7.75E-01	3.66E-01
Marine eutrophication	kg N eq	5.04E-03	4.57E-03	3.02E-03	2.29E-03	5.57E-03	3.10E-03	4.85E-03	4.42E-03
Resource depletion – mineral, fossil and renewable	kg Sb eq	5.10E-04	4.80E-04	4.00E-04	3.70E-04	5.00E-04	4.40E-04	4.40E-04	4.80E-04
Ozone depletion	kg CFC-11 eq	7.20E-07	7.01E-07	2.85E-07	2.51E-07	6.90E-07	4.62E-07	8.63E-07	1.03E-06
Particulate matter/Respiratory inorganics	kg PM2.5 eq	3.42E-03	3.30E-03	2.01E-03	1.86E-03	3.34E-03	2.47E-03	2.76E-03	3.27E-03
Photochemical ozone formation	kg NMVOC eq	1.57E-02	1.51E-02	7.87E-03	6.90E-03	1.40E-02	9.99E-03	1.32E-02	1.54E-02
Terrestrial eutrophication	molc N eq	4.75E-02	4.65E-02	2.39E-02	2.10E-02	4.30E-02	2.99E-02	3.99E-02	4.41E-02

Table A 2.1.2.2 Percentage contributions of the process steps to environmental impacts – CGH2

			H₂ Production	Truck Transport	Storage	Refueling Station
Acidification	molc H+ eq	2020	53.4%	41.8%	1.3%	3.5%
		2050	52.6%	43.7%	1.0%	2.7%
Climate change	kg CO ₂ eq	2020	23.5%	66.5%	2.5%	7.6%
		2050	25.1%	69.5%	1.3%	4.1%
Freshwater ecotoxicity	CTUe	2020	77.9%	17.3%	1.5%	3.4%
		2050	79.0%	17.3%	1.2%	2.6%
Freshwater eutrophication	kg P eq	2020	29.2%	50.6%	5.0%	15.2%
		2050	56.1%	38.6%	1.1%	4.2%
Human toxicity – cancer effects	CTUh	2020	69.4%	22.3%	1.8%	6.5%
		2050	76.4%	18.4%	0.9%	4.2%
Human toxicity – non-cancer effects	CTUh	2020	53.9%	38.1%	1.9%	6.1%
		2050	57.0%	37.8%	1.2%	4.1%
Ionizing radiation – human health	kBq U235 eq	2020	12.1%	73.0%	3.7%	11.2%
		2050	17.7%	79.8%	0.5%	2.0%
Marine eutrophication	kg N eq	2020	34.0%	57.6%	1.8%	6.7%
		2050	34.0%	60.4%	1.0%	4.6%
Resource depletion – mineral, fossil and renewable	kg Sb eq	2020	69.3%	28.0%	0.9%	1.8%
		2050	65.9%	30.9%	1.0%	2.3%
Ozone depletion	kg CFC-11 eq	2020	18.6%	75.5%	1.5%	4.4%
		2050	17.9%	77.1%	1.3%	3.7%
Particulate matter/Respiratory inorganics	kg PM _{2.5} eq	2020	47.5%	48.8%	0.9%	2.8%
		2050	44.9%	51.5%	0.9%	2.7%
Photochemical ozone formation	kg NMVOC eq	2020	34.2%	60.9%	1.2%	3.7%
		2050	31.9%	64.0%	0.9%	3.1%
Terrestrial eutrophication	molc N eq	2020	31.0%	63.0%	1.3%	4.6%
		2050	28.2%	66.9%	1.1%	3.8%

Table A 2.1.2.3 Environmental impacts per km driven in fuel cell electric vehicles (FCEV) and internal combustion engine vehicles (ICEV)

		FCEV		ICEV	
		2020	2050	2020	2050
Acidification	molc H+ eq	1.19E-03	7.10E-04	7.10E-04	7.00E-04
Climate change	kg CO2 eq	1.20E-01	8.26E-02	2.26E-01	2.24E-01
Freshwater ecotoxicity	CTUe	6.04E+00	4.42E+00	3.93E+00	3.91E+00
Freshwater eutrophication	kg P eq	1.10E-04	5.63E-05	3.56E-05	3.20E-05
Human toxicity – cancer effects	CTUh	2.28E-08	1.68E-08	1.17E-08	1.15E-08
Human toxicity – non-cancer effects	CTUh	1.35E-07	9.20E-08	5.40E-08	5.33E-08
Ionizing radiation – human health	kBq U235 eq	1.24E-02	7.32E-03	1.75E-02	1.69E-02
Marine eutrophication	kg N eq	1.50E-04	1.10E-04	1.00E-04	1.00E-04
Resource depletion – mineral, fossil and renewable	kg Sb eq	2.68E-05	2.14E-05	4.35E-05	4.35E-05
Ozone depletion	kg CFC-11 eq	1.74E-07	1.98E-08	3.73E-08	3.72E-08
Particulate matter/Respiratory inorganics	kg PM2.5 eq	1.20E-04	1.00E-04	1.10E-04	1.10E-04
Photochemical ozone formation	kg NMVOC eq	5.10E-04	4.00E-04	5.30E-04	5.30E-04
Terrestrial eutrophication	molc N eq	1.48E-03	1.21E-03	1.10E-03	1.10E-03

A 2.1.3 Case study “Batteries for stationary energy storage”

The following tables refer to the case study described in section 3.3.4. The results presented here have several limitations for the year 2050 with respect to prospective potential improvements, cathode materials and battery chemistries, and energy densities (see section 3.3.4). A detailed overview of the LCI can be found in [132] and [133].

Table A 2.1.3.1 Environmental impacts per year of the production and use of LFP and NMC cells with graphite anode (G) per kg of cell.

		LFP - G		NMC 811 - G	
		2020	2050	2020	2050
Acidification	molc H+ eq	0.1780	0.1780	0.6520	0.6519
Climate change	kg CO2 eq	10.8342	10.5321	12.1002	11.7981
Freshwater ecotoxicity	CTUe	123.1255	119.6336	459.3595	455.8677
Freshwater eutrophication	kg P eq	3.70E-03	2.95E-03	1.28E-02	1.21E-02
Human toxicity – carcinogenics	CTUh	4.01E-06	3.97E-06	1.32E-06	1.28E-06
Human toxicity – non-carcinogenics	CTUh	3.33E-06	3.21E-06	1.90E-05	1.89E-05
Ionizing radiation – human health	kBq U235 eq	1.60E-06	1.47E-06	2.60E-06	2.48E-06
Marine eutrophication	kg N eq	5.25E-01	4.48E-01	7.75E-01	6.99E-01
Ozone depletion	kg CFC-11 eq	9.69E-03	9.49E-03	1.28E-02	1.26E-02
Particulate matter/Respiratory inorganics	kg PM2.5 eq	1.40E-04	1.40E-04	7.13E-05	7.13E-05
Photochemical ozone formation	kg NMVOC eq	7.80E-03	7.87E-03	3.60E-02	3.61E-02
Resource depletion – mineral, fossil and renewable	kg Sb eq	1.68E-02	1.68E-02	7.23E-02	7.22E-02
Terrestrial eutrophication	molc N eq	1.05E-03	1.06E-03	3.76E-03	3.77E-03

Table A 2.1.3.2 Environmental impacts per year of the production and use of LFP and NMC cells per kWh storage capacity.

		LFP		NMC 811	
		2020	2050	2020	2050
Energy density	Wh/kg	0.13	0.28	0.16	0.34
Acidification	molc H+ eq	1.3695	0.6355	4.0751	1.9175
Climate change	kg CO2 eq	83.3402	37.6148	75.6264	34.7004
Freshwater ecotoxicity	CTUe	947.1190	427.2630	2870.9969	1340.7873
Freshwater eutrophication	kg P eq	2.85E-02	1.05E-02	8.01E-02	3.55E-02
Human toxicity – carcinogenics	CTUh	3.09E-05	1.42E-05	8.28E-06	3.76E-06
Human toxicity – non-carcinogenics	CTUh	2.56E-05	1.15E-05	1.19E-04	5.56E-05
Ionizing radiation – human health	kBq U235 eq	1.23E-05	5.26E-06	1.63E-05	7.29E-06
Marine eutrophication	kg N eq	4.04E+00	1.60E+00	4.84E+00	2.05E+00
Ozone depletion	kg CFC-11 eq	7.45E-02	3.39E-02	8.01E-02	3.71E-02
Particulate matter/Respiratory inorganics	kg PM2.5 eq	1.08E-03	5.00E-04	4.46E-04	2.10E-04
Photochemical ozone formation	kg NMVOC eq	6.00E-02	2.81E-02	2.25E-01	1.06E-01
Resource depletion – mineral, fossil and renewable	kg Sb eq	1.30E-01	5.99E-02	4.52E-01	2.12E-01
Terrestrial eutrophication	molc N eq	1.05E-03	1.06E-03	3.76E-03	3.77E-03

A 2.2 Results for economic assessment

A 2.2.1 Caste study “Synthetic biofuels for mobility”

Within the subsequent tables, manufacturing cost estimations for synthetic biofuels are presented for the base year 2020 and the projection year 2050 for different economic perspectives (societal and business perspective). For prospective assessment, higher wholesale electricity prices together with assumed higher efficiencies of CHP are leading to higher revenues for electricity and lower biofuel manufacturing costs. For investment estimations, a progress factor of 0.95 is assumed. Assumed rising natural gas prices in 2050 have no significant impact on the overall result. Additionally, so called mobility costs are estimated, including costs for synthetic biofuel use in passenger car and compared to mobility costs using fossil gasoline (Table A 2.2.1.4). Prospective manufacturing costs of fossil gasoline are calculated as average value of product acquisition costs of the last ten years [108]. Accordingly, costs for transport, storage and service stations are calculated as average value of contribution margin of the last ten years [108]. Manufacturing costs for synthetic gasoline from straw are based on [100]. Deviant from results for environmental assessment but in analogy to the case study “hydrogen mobility”, in this example a small size passenger car is considered for the use phase: The considered internal combustion engine vehicle (ICEV) is comparable to a VW Golf and has a power of 100 kW. Underlying mass and energy flows for economic assessment are based on [100].

Table A 2.2.1.1 Manufacturing costs of synthetic biofuel (gasoline from straw – “Straw”, gasoline from wood – “Wood”) from a societal perspective with an interest rate of 2.5%, depreciation period 20 a

		Straw		Wood	
		2020	2050	2020	2050
Biomass Provision	Cent/l	42.43	42.43	66.38	66.38
Pyrolysis	Cent/l	34.08	29.94	34.08	29.94
Gasification	Cent/l	40.29	36.06	40.29	36.06
Synthesis	Cent/l	37.18	30.92	37.19	30.93
Revenues for electricity	Cent/l	-4.54	-19.12	-4.54	-19.12
Sum	Cent/l	149.44	120.24	173.39	144.19
Difference 1.5% IR	Cent/l	-3.09	-2.51	-3.09	-2.51
Difference 3.5% IR	Cent/l	3.24	2.63	3.24	2.63

Table A 2.2.1.2 Manufacturing costs of synthetic biofuel (gasoline from straw – “Straw”, gasoline from wood – “Wood”) from a business perspective with an interest rate of 8%, depreciation period 10 a

		Straw		Wood	
		2020	2050	2020	2050
Biomass Provision	Cent/l	42.43	42.43	66.38	66.38
Pyrolysis	Cent/l	45.98	39.58	45.98	39.58
Gasification	Cent/l	52.63	46.05	52.63	46.05
Synthesis	Cent/l	55.20	45.51	55.20	45.51
Revenues for electricity	Cent/l	-4.54	-19.12	-4.54	-19.12
Sum	Cent/l	191.69	154.45	215.64	178.40
Difference 7% IR	Cent/l	-3.45	-2.80	-3.45	-2.80
Difference 9% IR	Cent/l	3.52	2.85	3.52	2.85

Table A 2.2.1.3 Manufacturing costs of synthetic biofuel (gasoline from straw – “Straw”, gasoline from wood – “Wood”) according to cost categories on the example of 2050 with an interest rate of 2.5%, depreciation time 20 a

		Straw	Wood
Capital costs	Cent/l	23.39	23.39
Consumable costs	Cent/l	54.89	78.84
Operating costs	Cent/l	41.96	41.96
Sum	Cent/l	120.24	144.19

Table A 2.2.1.4 Mobility costs on the example of synthetic biofuel from straw, interest rate of 2.5%, depreciation time fuel production plant 20 a, passenger car 18 a

		ICEV Biofuel Straw	
		2020	2050
Capital costs	Cent/km	10.78	10.78
Consumable costs (fuel costs incl. transport, storage, gas stations)	Cent/km	9.83	8.08
Operating costs	Cent/km	11.15	11.15
Mobility costs	Cent/km	31.76	30.01

A 2.2.2 Case study “Hydrogen from wind power for mobility”

The following tables refer to the case study described in section 3.3.2 and the results presented in Figure 8 and Figure 9 of section 4.2. The results of the hydrogen production pathways are based on [93]. The reference year has been updated from 2015 to 2020. For electricity mix composition, data presented in A 1.2 (Table A 1.2.1) have been used. Other economic and technical data have been checked and updated, e.g. by [123] for the LOHC technology.

Table A 2.2.2.1 Hydrogen supply costs from a societal perspective with an interest rate of 2.5%

		CG H2		Pipeline		LH2		LOHC	
		2020	2050	2020	2050	2020	2050	2020	2050
H ₂ Production	€/kg	7.40	4.34	7.40	4.34	7.40	4.34	7.40	4.34
Hydrogenation	€/kg	-	-	-	-	-	-	0.70	0.23
Liquefaction	€/kg	-	-	-	-	2.46	2.04	-	-
Compression	€/kg	0.58	0.38	0.51	0.24	-	-	-	-
Storage	€/kg	0.21	0.21	0.21	0.21	0.13	0.21	0.36	0.34
Transport	€/kg	0.71	0.53	0.69	0.72	0.20	0.19	0.34	0.30
Dehydrogenation	€/kg	-	-	-	-	-	-	2.94	1.51
Refueling Station	€/kg	4.24	1.49	3.75	1.40	2.62	0.92	3.86	1.64
LOHC Production	€/kg	-	-	-	-	-	-	0.02	0.02
Sum	€/kg	13.14	6.95	12.56	6.91	12.78	7.70	15.61	8.38
Difference 1.5% IR	€/kg	-0.35	-0.14	-0.40	-0.21	-0.35	-0.20	-0.47	-0.21
Difference 3.5% IR	€/kg	0.36	0.15	0.43	0.22	0.41	0.21	0.50	0.22

Table A 2.2.2.2 Hydrogen supply costs from a business perspective with an interest rate of 8%

		CG H2		Pipeline		LH2		LOHC	
		2020	2050	2020	2050	2020	2050	2020	2050
H ₂ Production	€/kg	8.11	4.69	8.11	4.69	8.11	4.69	8.11	4.69
Hydrogenation	€/kg	-	-	-	-	-	-	0.93	0.26
Liquefaction	€/kg	-	-	-	-	3.10	2.48	-	-
Compression	€/kg	0.70	0.42	0.64	0.28	-	-	-	-
Storage	€/kg	0.32	0.29	0.32	0.29	0.13	0.31	0.57	0.54
Transport	€/kg	0.82	0.58	1.22	1.26	0.23	0.22	0.36	0.32
Dehydrogenation	€/kg	-	-	-	-	-	-	3.67	1.85
Refueling Station	€/kg	5.38	1.85	4.88	1.75	3.69	1.26	4.99	2.00
LOHC Production	€/kg	-	-	-	-	-	-	0.02	0.02
Supply costs	€/kg	13.21	7.94	12.77	8.27	13.38	8.97	13.85	9.69
Difference 7% IR	€/kg	-0.44	-0.18	-0.52	-0.27	-0.49	-0.25	-0.60	-0.26
Difference 9% IR	€/kg	0.45	0.18	0.53	0.28	0.50	0.26	0.62	0.27

Table A 2.2.2.3 Hydrogen supply costs according to cost categories on the example of 2050 values with an interest rate of 2.5%

		CG H2	Pipeline	LH2	LOHC
Capital cost	€/kg	1.44	1.81	2.07	2.17
Consumable cost	€/kg	3.81	3.57	4.25	4.34
Operation cost	€/kg	1.27	1.16	1.20	1.50
Other cost	€/kg	0.42	0.37	0.18	0.37
Supply costs	€/kg	6.95	6.91	7.70	8.38

Table A 2.2.2.4 Mobility costs on the example of hydrogen supply with CGH2 and an interest rate of 2.5%

		FCEV		ICEV	
		2020	2050	2020	2050
Capital costs	€/km	0.30	0.11	0.11	0.11
Consumable costs	€/km	0.10	0.04	0.03	0.03
Operating costs	€/km	0.15	0.09	0.11	0.11
Mobility costs	€/km	0.55	0.24	0.25	0.25

A 2.2.3 Case study “Batteries for stationary energy storage”

The following tables refer to the case study described in section 3.3.4. The results from the economic evaluation for LFP and NMC 811 battery cells are based on a bottom up approach from [154]. It is assumed that battery cost is highly dependent on the manufacturing capacity of the viewed production site, location and chemistry. Here the same limitations apply as the ones highlighted in section SM 1.3 for the E-LCA results.

Table A 2.2.3.1 Considered LIB-manufacturing capacity for analyzed cell types

Manufacturing Capacity	
2020	4 GWh/a
2050	35 GWh/a

Table A 2.2.3.2 LFP and NMC 811 supply costs from a societal perspective with an interest rate of 2.5%

IR=2.5%	LFP		NMC811		
	2020	2050	2020	2050	
Manufacturing Capital	€/kWh _{cap}	14.07	7.18	11.66	5.93
Cells	€/kWh _{cap}	45.96	31.88	46.62	35.02
Pack Components	€/kWh _{cap}	0.25	0.20	26.07	25.15
Labor	€/kWh _{cap}	19.61	7.90	16.18	6.46
Utilities	€/kWh _{cap}	0.25	0.20	0.25	0.20
O&M	€/kWh _{cap}	14.14	4.40	10.68	3.89
Depreciation & Financing	€/kWh _{cap}	9.85	5.03	8.19	4.21
Other Costs	€/kWh _{cap}	53.12	13.97	40.10	13.49
Sum	€/kWh _{cap}	157.24	70.76	159.75	94.35
Difference 1.5% IR	€/kWh _{cap}	(2.45)	(0.54)	(0.87)	(0.44)
Difference 3.5% IR	€/kWh _{cap}	1.16	0.59	0.96	0.49

Table A 2.2.3.3 LFP and NMC 811 supply costs from a business perspective with an interest rate of 8%

IR=8.0%		LFP		NMC811	
		2020	2050	2020	2050
Manufacturing Capital	€/kWh _{cap}	22.02	11.23	18.25	9.28
Cells	€/kWh _{cap}	45.96	31.88	46.62	35.02
Pack Components	€/kWh _{cap}	0.25	0.20	26.07	25.15
Labor	€/kWh _{cap}	19.61	7.90	16.18	6.46
Utilities	€/kWh _{cap}	0.25	0.20	0.25	0.20
O&M	€/kWh _{cap}	14.14	4.40	10.68	3.89
Depreciation & Financing	€/kWh _{cap}	9.85	5.03	8.19	4.21
Other Costs	€/kWh _{cap}	53.12	13.97	40.10	13.49
Sum		165.19	74.81	166.33	97.70
Difference 7% IR	€/kWh _{cap}	(1.77)	(0.90)	(1.47)	(0.75)
Difference 9% IR	€/kWh _{cap}	1.95	0.99	1.61	0.82

Table A 2.2.3.4 LFP and NMC 811 supply costs according to cost categories on the example of 2050 values with an interest rate of 2.5%

IR=2.5%		LFP		NMC811	
		2020	2050	2020	2050
CAPEX	€/kWh _{cap}	14.07	7.18	11.66	5.93
OPEX	€/kWh _{cap}	143.17	63.58	148.08	88.42
Consumables - Cells	€/kWh _{cap}	45.96	31.88	46.62	35.02
Consumables - Pack	€/kWh _{cap}	0.25	0.20	26.07	25.15
Operation & Maintenance	€/kWh _{cap}	87.12	26.46	67.20	24.04
Depreciation & Financing	€/kWh _{cap}	9.85	5.03	8.19	4.21
Sum	€/kWh _{cap}	157.24	70.76	159.75	94.35

Difference 1.5% IR	€/kWh _{cap}	(2.45)	(0.54)	(0.87)	(0.44)
Difference 3.5% IR	€/kWh _{cap}	1.16	0.59	0.96	0.49

Table A 2.2.3.5 LFP and NMC 811 supply costs according to cost categories on the example of 2050 values with an interest rate of 8%

IR=8.0%		LFP		NMC811	
		2020	2050	2020	2050
CAPEX	€/kWh_{cap}	22.02	11.23	18.25	9.28
OPEX	€/kWh_{cap}	143.17	63.58	148.08	88.42
Consumables - Cells	€/kWh _{cap}	45.96	31.88	46.62	35.02
Consumables - Pack	€/kWh _{cap}	0.25	0.20	26.07	25.15
Operation & Maintenance	€/kWh _{cap}	87.12	26.46	67.20	24.04
Depreciation & Financing	€/kWh _{cap}	9.85	5.03	8.19	4.21
Sum	€/kWh_{cap}	165.19	74.81	166.33	97.70
Difference 1.5% IR	€/kWh _{cap}	(1.77)	(0.90)	(1.47)	(0.75)
Difference 3.5% IR	€/kWh _{cap}	1.95	0.99	1.61	0.82

A 2.3 Results for patent analysis

A detailed overview of the methodology and the used software can be found in [83]. It has to be mentioned that patents for the different countries are allocated via fractional counting. This stems from the fact, that most patents include inventors from more than one country. Here the patents are equally distributed for each inventor.

A 2.3.1 Caste study “Synthetic biofuels for mobility”

Table A 2.3.1.1 Yearly patent growth of pyrolysis and gasification technologies for biomass. The columns “Country” contains the patents per year and corresponding country. The column patent growth reflects the annual change of activities for all countries (based on [83]).

Year	Country							Patent growth
	DE	CN	US	JP	GB	AU	Total	Annual change
1995	2	0	1	0	0	0	3	100%
1996	0	0	2	0	0	0	2	-33%
1997	1	0	0	0	0	0	1	-67%
1998	0	0	0	2	0	0	2	0%
1999	1	0	0	4	0	0	5	92%
2000	0	0	1	7	0	0	8	-21%
2001	3	0	0	2	0	0	5	-44%
2002	0	1	0	4	1	0	6	121%
2003	4	1	1	8	0	0	14	36%
2004	2	0	0	9	1	0	12	-10%

2005	1	0	3	11	1	0	16	51%
2006	4	3	1	9	0	0	17	9%
2007	3	10	3	9	0	0	25	53%
2008	0	9	3	9	0	2	23	110%
2009	3	28	2	9	0	1	43	22%
2010	6.7	14	5.9	3	0	0	29.5	-28%
2011	1	13	3	4	1.5	0.5	23	0%
2012	1	20	5	3	0	0	29	-14%
2013	1.3	22	7.6	6	1	0	38	12%
2014	0	21.6	8.4	2	1	1	34	-1%
2015	1	38	4	3	1	1	48	-21%
2016	0	35.6	0.4	3	2	0	41	-47%
2017	0	46	2	0	0	0	48	-73%
2018	0	19	0	1	0	0	20	-87%

A 2.3.2 Case study “Hydrogen from wind power for mobility”

Table A 2.3.2.1 Yearly patent growth of AWE. The columns “Country” contains the patents per year and corresponding country. The column patent growth reflects the annual change of activities for all countries (based on [83]).

Year	Country							Patent growth
	DE	JP	CN	US	FR	KR	Total	Annual change
1995	0	1	0	0	0	0	1	0%
1996	0	1	0	0	0	0	1	-50%
1997	0	1	0	0	0	0	1	-67%
1998	0	3	0	0	0	0	3	-50%
1999	0	0	0	1	0.3	0	1.3	100%
2000	1	0	0	0	0	0	1	0%
2001	0	1	0	0	1	0	2	-11%
2002	0	1	0	0	0	0	1	-88%
2003	1	1	0	1	0	0	3	11%
2004	2	0	0	0	1	0	3	-7%
2005	0	0	1	1	0	0	2	33%
2006	0	0	1	1	1	0	3	5%
2007	1	0	2	0	0	0	3	-30%
2008	0	2	0	1	0	0	3	-62%
2009	0	0	2	1	0	0	3	-50%
2010	0	3	1	0	0	0	4	-64%
2011	0	1	0	0	1	1	3	30%
2012	0	1	1	0	1	0	3	-63%
2013	0	6	0	0	0	0	6	-73%
2014	0	2	7	0	0	2	11	22%
2015	0.2	4	3	1	0	2.8	11	-3%
2016	0	4	3	3	0	0	10	-43%

2017	1	3	3	0	0	3	10	-29%
2018	2	5	4	0	0	0	11	-49%

A 2.3.3 Case study “Batteries for stationary energy storage”

Table A 2.3.3.1 Yearly patent growth of Li-Ion batteries. The columns “Country” contains the patents per year and corresponding country. The column patent growth reflects the annual change of activities for all countries (based on [83]).

Year	Country							Patent growth
	DE	JP	CN	US	KR	FR	Total	Annual change
1995	0	0	0	3	0	0	3	0%
1996	0	1	0	3	0	0	4	50%
1997	0	3	1	4	0	0	8	115%
1998	0	5	0	2	4	0	11	72%
1999	1	6	0	6	3	1	17	316%
2000	0	8	0	4	4	0	16	-11%
2001	0	15	1	6	3	0	25	32%
2002	0	3	3	1	2	0	9	-17%
2003	4	21	8	9	9	0	51	135%
2004	0	16	11	4	9	0	40	3%
2005	2	20	10	3	14	1	50	114%
2006	1	25	9	8	36	0	79	8%
2007	1	40	12	6	25	1	85	58%
2008	6	34	8	9	10	2	69	72%
2009	7	50	9	8	17	0	91	-12%
2010	25	95	17	26	9	0	172	31%
2011	33	128	43	17	15	1	237	58%
2012	44	137	45	12	15	5	258	88%
2013	54	209	83	34	21	9	409	110%
2014	87	163	82	31	35	7	404	58%
2015	22	174	77	19	31	4	327	-12%
2016	16	235	161	43	34	4	492	1%
2017	13	215	126	27	20	2	402	-38%
2018	16	186	93	20	28	2	344	-48%