

Quantum speedup for solving the one-dimensional Hubbard model using quantum annealing

Kunal Vyas^{1,2,*}, Fengping Jin^{1,†}, Hans De Raedt¹, and Kristel Michielsen^{1,3}

¹Jülich Supercomputing Centre, *Forschungszentrum Jülich*, D-52425 Jülich, Germany

²Department of Physics, *RWTH Aachen University*, 52056 Aachen, Germany

³Department of Computer Science, *University of Cologne*, 50931 Cologne, Germany



(Received 14 October 2025; accepted 7 April 2026; published 1 May 2026)

The Hubbard model has occupied the minds of condensed matter physicists for most part of the last century. This model provides insight into a range of phenomena in correlated electron systems. We wish to examine the paradigm of quantum algorithms for solving such many-body problems. The focus of our current work is on the one-dimensional model that is integrable, meaning that there exist analytical results for determining its ground state. In particular, we demonstrate how to perform a gate-based quantum computer simulation of quantum annealing for the Hubbard Hamiltonian. We perform simulations for systems with up to 40 qubits to study the scaling of required annealing time for obtaining the ground state. We find that for the half-filled cases considered, there is a polynomial quantum speedup over algorithms based on the Bethe-ansatz equations.

DOI: [10.1103/bj6c-t252](https://doi.org/10.1103/bj6c-t252)

I. INTRODUCTION

The Hubbard model is believed to be one of the simplest models that can capture qualitative behavior of correlated fermions, which cannot be reconciled within band theory [1]. The Hamiltonian for a one-dimensional lattice with open boundaries emerging from this model is given by

$$H = -t_H \sum_{\substack{i=1 \\ \sigma=\uparrow,\downarrow}}^{L-1} (c_{i\sigma}^\dagger c_{i+1\sigma} + c_{i+1\sigma}^\dagger c_{i\sigma}) + U \sum_{i=1}^L n_{i\uparrow} n_{i\downarrow}, \quad (1)$$

where L is the number of sites of the lattice, $c_{i\sigma}^\dagger$ ($c_{i\sigma}$) is the fermion creation (annihilation) operator of spin σ at site i , and $n_{i\sigma} = c_{i\sigma}^\dagger c_{i\sigma}$ is the number operator of spin σ at site i . The first sum of terms describes the nearest-neighbor hopping of the electrons, t_H being the hopping integral. The second sum describes the on-site repulsive interaction with strength $U > 0$.

Despite the apparent simplicity of the Hamiltonian, exact results for the solution to the eigenvalue problem of this Hamiltonian only exist in the thermodynamic limit for the one-dimensional lattice [2]. Even for the one-dimensional model, the procedure is nontrivial and was first performed by Lieb and Wu [3] for periodic boundary conditions. They used the Bethe ansatz [4] to reduce the eigenvalue problem to the

Bethe-ansatz equations, which are a set of coupled nonlinear algebraic equations, now called the Lieb-Wu equations. The Lieb-Wu equations can be analyzed in the thermodynamic limit, and certain properties like the ground-state energy can be obtained in a closed form by solving a set of coupled integral equations. The one-dimensional Hubbard model is thus integrable [5] and is considered to be *solved* in this sense.

In the present paper, we study the finite one-dimensional Hubbard model with open boundaries from the perspective of quantum computing. There exist Bethe-ansatz equations also for this version of the problem, which were first calculated by H. Schulz [6]. The equations for the quantum numbers $\{k_1, k_2, \dots, k_N\}$ and $\{\lambda_1, \lambda_2, \dots, \lambda_{N_\downarrow}\}$ that determine the ground state read

$$2k_j(L+1) = 2\pi j + \sum_{b=\pm 1} \sum_{r=1}^{N_\downarrow} \phi(2 \sin k_j + 2b\lambda_r), \quad (2)$$

$$\begin{aligned} & \sum_{b=\pm 1} \sum_{l=1}^N \phi(2b \sin k_l + 2\lambda_r) \\ &= -2\pi r + \sum_{b=\pm 1} \sum_{s \neq 1}^{N_\downarrow} \phi(\lambda_r + b\lambda_s), \end{aligned} \quad (3)$$

where $\phi(x) = -2 \arctan(2xt_H/U)$, $N_\sigma = \sum_{i=1}^L n_{i\sigma}$ is the total number of fermions with spin σ , $N = N_\uparrow + N_\downarrow$ is the total number of fermions, and the ground-state energy is given by

$$E = -2t_H \sum_{j=1}^N \cos k_j. \quad (4)$$

Going to the thermodynamic limit by taking $L \rightarrow \infty$, and keeping the ratios N/L and $N_\downarrow/N$ constant, Eqs. (2) and (3) turn into coupled integral equations [6]. These equations can be solved analytically for the case of $2N_\downarrow = N = L$, and the corresponding ground-state energy can be calculated. However, for general L , N , and $N_\downarrow$, a computer is needed to solve

*Contact author: k.vyas@fz-juelich.de

†Contact author: f.jin@fz-juelich.de

the respective Bethe-ansatz equations. The time required to solve the equations by a root-finding algorithm scales polynomially with L , and thus, the ground-state energy can also be found for large L . On the other hand, finding the ground state using the roots is still exponentially expensive due to the requirement of calculating an exponentially large number of coefficients.

For the Grover algorithm [7], it was shown that a quadratic speedup can be achieved compared to the best-known classical algorithm for searching for an item in a list. This result played a significant role in demonstrating the potential of quantum computers. Similarly, a question emerges in the context of integrable quantum many-body systems, which are polynomially hard to solve: Whether a quantum algorithm can provide any kind of benefit in finding the ground state of such systems. The one-dimensional Hubbard model serves as the perfect toy problem in taking a step toward answering this question.

Various techniques to address this question are currently being investigated. One of the popular algorithms to obtain the ground state is the variational quantum eigensolver (VQE) [8]. In Refs. [9,10], strategies for implementing VQE on a quantum computer are presented. Even though they show good success probabilities for achieving the ground state of Hubbard systems, the scalability of these methods is still unclear.

An alternative way to approach the problem of finding the eigenstates of Eq. (1) is to use a quantum algorithm to prepare the Bethe-ansatz states directly on a quantum computer [11,12]. These papers demonstrate methods to obtain eigenstates of XX and XXZ models using the respective Bethe-ansatz equations. They were able to achieve linear scaling of resources for finding particular eigenstates of these models. However, success probabilities for large systems were not shown.

A distinct method that is gaining popularity is the algorithm of quantum annealing [13–15], which can be used to find the ground state of a Hamiltonian. Quantum annealing is being investigated prominently for solving optimization problems. Various problems have been approached through such ideas [14–18], and there has been some progress in understanding what kind of an advantage they can bring, if any, over classical methods of solving them [19–24].

On the other hand, one of the most compelling promises of quantum computers is the simulation of quantum systems [25,26]. Due to the advent of analog quantum devices, the dynamics of a variety of many-body quantum systems can be implemented on them [27–29]. Digital quantum computers also offer prospects for modeling strongly correlated quantum systems [26,30–32] that are too large to be treated by conventional computers. Moreover, simulating quantum dynamics of these systems on a quantum computer enables the investigation of several physical phenomena, such as phase transitions [29,30].

In light of all this, we wish to examine the potential of quantum annealing in order to understand its utility for finding the ground state of quantum systems by simulating quantum dynamics of the Hubbard model on a quantum computer. We implement the protocol of quantum annealing on a quantum computer simulator, demonstrating the resource requirement

for a faithful gate-based simulation of a quantum system while studying its performance for achieving the ground state of the Hubbard model described by the Hamiltonian equation (1).

We investigate the scaling of the performance of the quantum annealing algorithm to solve the problem under consideration with respect to the system size. We find that the time required to find the ground state of the Hubbard model on a one-dimensional lattice in a subspace with $2N_{\downarrow} = N = L$ scales at most linearly with system size. This suggests a polynomial quantum speedup over algorithms based on the Bethe-ansatz equations.

We begin by providing the background about adiabatic quantum computing and quantum annealing in Sec. II. In Sec. III, we show how the algorithm of quantum annealing for the Hubbard model can be implemented on a gate-based quantum computer. Subsequently, we present our results of the simulations we perform for systems with up to 40 qubits in Sec. IV and demonstrate the analysis. Finally, we discuss the conclusions and implications of these results in Sec. V.

II. QUANTUM ANNEALING

A. Theory

Quantum annealing is a method that is based on the exploitation of the quantum adiabatic theorem [33,34] to find eigenstates of Hamiltonians that are computationally hard to find. The theorem points us toward an idea that is now quite well known: if the system is in an eigenstate and the Hamiltonian is changed adiabatically, then the system remains in the corresponding eigenstate of the evolving Hamiltonian, provided that the energy gap of the eigenstate with respect to other instantaneous eigenstates does not close during the evolution. This property can be used to calculate the ground state of a Hamiltonian without explicitly solving its eigenvalue equation, which is generally hard if the Hilbert space is large.

Suppose we have a Hamiltonian H_p for which we want to find the ground state given by

$$H_p |\phi_{p,0}\rangle = E_{p,0} |\phi_{p,0}\rangle,$$

where $E_{p,0}$ is the lowest eigenvalue of H_p and $|\phi_{p,0}\rangle$ is the corresponding eigenvector. In lieu of solving this eigenvalue problem, we can prepare a system in a quantum state $|\psi\rangle = |\phi_{i,0}\rangle$, where $|\phi_{i,0}\rangle$ is a known and easy-to-prepare ground state of some initial Hamiltonian H_i , and transform the system such that the instantaneous Hamiltonian, say, $H(s)$, can be written as

$$H(s) = f_i(s)H_i + f_p(s)H_p,$$

where $f_i(s)$ and $f_p(s)$ are real functions of s so that $H(s)$ goes from $H_i \rightarrow H_p$ as s goes from $0 \rightarrow 1$. Provided that the ground-state energy of $H(s)$ is always separated by a gap from the energy of the first excited state during this process and that $H(s)$ evolves adiabatically into H_p , the state of the system at $s = 1$ would be $|\phi_{p,0}\rangle$. This protocol of transforming the Hamiltonian using a single parameter s so that we obtain the ground state of H_p is nowadays called quantum annealing.

Evolution of real systems can never be described by an adiabatically evolving quantum state, which begs the question of how slowly the Hamiltonian should evolve in order to obtain

a reasonable estimate of the ground state. If we call $|\phi_j(s)\rangle$ as the j th eigenstate of $H(s)$ and $|\psi(s)\rangle$ as the instantaneous state of the system, the following bound [35]:

$$1 - |\langle \phi_0(1) | \psi(1) \rangle|^2 \leq \frac{1}{T_A^2} \left(\frac{\|\dot{H}(0)\|}{\Delta^2(0)} + \frac{\|\dot{H}(1)\|}{\Delta^2(1)} + \int_0^1 \left(7 \frac{\|\dot{H}\|^2}{\Delta(s)^3} + \frac{\|\ddot{H}\|}{\Delta(s)^2} \right) ds \right)^2 \quad (5)$$

serves as a statement of the adiabatic theorem, giving us a window to look at and analyze the behavior of total quantum annealing time required with respect to system size. In Eq. (5), T_A is the total annealing time, $\Delta(s) = E_1(s) - E_0(s)$, and $\|A\|$ represents the spectral norm of matrix A .

Equation (5) shows that for a given problem, the transition probability [left-hand side of Eq. (5)] will always be bounded by T_A^{-2} times a value that depends on the gaps in the spectrum and the annealing schedule. Thus, this gap-dependent factor could help us understand how T_A scales across system sizes for a given annealing schedule.

B. Annealing the Hubbard Hamiltonian

We investigate the protocol of quantum annealing for a particular schedule to find the ground state of Eq. (1) with half-filled lattices. We want to study how the total annealing time scales to get a reasonable estimate of the ground state with system size. To this end, we simulate quantum annealing for the Hubbard Hamiltonian for a range of system sizes and evaluate the performance. The annealing schedule that we use is

$$H(s) = (1-s)H_I + sH_H, \quad (6)$$

where H_I is the initial Hamiltonian.

The instantaneous Hamiltonian linearly depends on the anneal parameter s , starting from the initial Hamiltonian and ending as the Hubbard Hamiltonian at the end of the anneal. It is important to choose the initial Hamiltonian, such that its ground state is easy to prepare. A natural choice is

$$H_I = -t_H \sum_{\substack{i=1 \\ \sigma=\uparrow, \downarrow}}^{L-1} (c_{i\sigma}^\dagger c_{i+1\sigma} + c_{i+1\sigma}^\dagger c_{i\sigma}). \quad (7)$$

Clearly, Eq. (7) is just the hopping part of Eq. (1). Thus, the instantaneous Hamiltonian for a Hubbard system in one dimension with nearest-neighbor hopping and open boundaries can be written as

$$H(s) = -t_H \sum_{\substack{i=1 \\ \sigma=\uparrow, \downarrow}}^{L-1} (c_{i\sigma}^\dagger c_{i+1\sigma} + c_{i+1\sigma}^\dagger c_{i\sigma}) + sU \sum_i n_{i\uparrow} n_{i\downarrow}. \quad (8)$$

The annealing Hamiltonian evolves from the Hamiltonian for free fermions hopping on a lattice at $s = 0$, and the interaction grows in strength as s goes to 1. This implies that for nonzero s , the instantaneous Hamiltonian is a Hubbard Hamiltonian with sU as the interaction strength. Hence, this choice of the initial Hamiltonian also helps us to understand how quantum annealing performs for various interaction strengths.

III. GATE-BASED SIMULATIONS

Simulating ideal quantum annealing means solving the time-dependent Schrödinger equation (TDSE)

$$i\hbar \frac{d}{dt} |\psi(t)\rangle = H(t) |\psi(t)\rangle \quad (9)$$

for the Hamiltonian Eq. (8) with $t = sT_A$.

Since we are interested in investigating the performance of a quantum computer for finding the ground state using quantum annealing, we simulate Schrödinger dynamics using quantum circuits. To perform gate-based simulations of quantum annealing for Hubbard-like models, we need two kinds of circuits:

- (1) initial state preparation circuit;
- (2) circuit for performing dynamics of quantum annealing.

In the following sections, we describe how we construct these circuits to perform quantum annealing for fermion systems on a digital quantum computer.

A. Jordan-Wigner transformation

The first step is to transform the fermion Hamiltonian into a qubit Hamiltonian comprising Pauli matrices. To preserve the fermion character of the Hamiltonian, the operators in the transformed Hamiltonian need to obey the same anticommutation relations as fermion operators. We also need to map the fermion states to qubit states. A straightforward way to do this is to use the Jordan-Wigner transformation [36] in which the $2L$ spin orbitals on L lattice sites are mapped onto $2L$ qubits, where each occupied spin orbital corresponds to $|1\rangle$ and each unoccupied spin orbital corresponds to $|0\rangle$.

According to the Jordan-Wigner transformation, the fermion creation and annihilation read

$$\begin{aligned} c_i^\dagger &\rightarrow \frac{1}{2} Z_1 \cdots Z_{i-1} (X_i - iY_i), \\ c_i &\rightarrow \frac{1}{2} Z_1 \cdots Z_{i-1} (X_i + iY_i), \end{aligned} \quad (10)$$

where X_i, Y_i, Z_i are Pauli matrices acting on the i th qubit.

Representing the spin- $\uparrow$ orbitals on positions 1 to L and spin- $\downarrow$ orbitals on positions $L+1$ to $2L$, the transformed Hamiltonian reads

$$\begin{aligned} H(s) &= -\frac{t_H}{2} \sum_{\substack{i=1 \\ i \neq L}}^{2L-1} (X_i X_{i+1} + Y_i Y_{i+1}) \\ &\quad + \frac{sU}{4} \sum_{i=1}^L (I - Z_i)(I - Z_{i+L}). \end{aligned} \quad (11)$$

Simulating the real-time dynamics of the fermion Hamiltonian equation (8) is equivalent to simulating the real-time dynamics of the qubit Hamiltonian equation (11). We use the latter to construct quantum circuits that perform quantum annealing and use them to study their performance.

B. Initial state preparation

An essential step in performing quantum annealing is to prepare the system in the ground state of the initial Hamiltonian. Therefore, we need a quantum circuit that initializes the state of a quantum computer in the ground state of H_I .

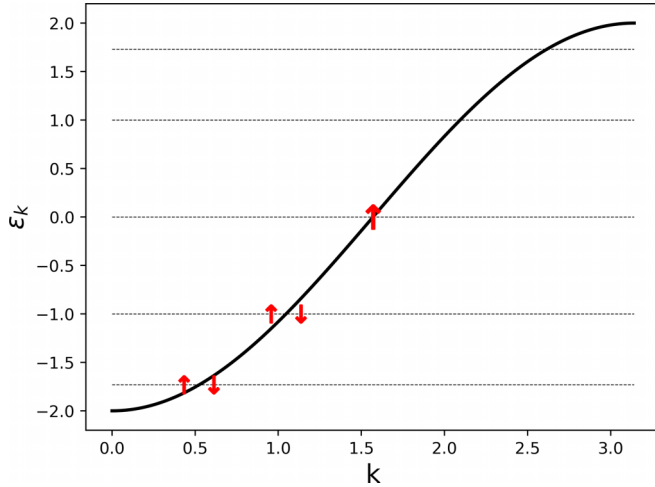


FIG. 1. Dispersion relation and the ground-state occupation of the energy levels of the initial Hamiltonian for $L = 5$, $N_{\uparrow} = 3$, and $N_{\downarrow} = 2$.

Preparing the ground state of H_I on a quantum computer might not be an easy task. Fortunately, through the work in Refs. [30,31], we have an algorithm to prepare the ground state of this noninteracting fermion Hamiltonian.

The first step is to diagonalize H_I by Fourier (sine) transformation. Using

$$c_{k\sigma}^{\dagger} = \sqrt{\frac{2}{L+1}} \sum_{j=1}^L \sin(kj) c_{j\sigma}^{\dagger}, \quad (12)$$

where $k = m\pi/(L+1)$, $m = 1, 2, \dots, L$, H_I becomes

$$H_I = \sum_{k,\sigma} \epsilon_k c_{k\sigma}^{\dagger} c_{k\sigma}, \quad (13)$$

where $\epsilon_k = -2t_H \cos k$.

The Hamiltonian equation (8) commutes with the total number operator N . Our quantum annealing protocol also preserves the total number of spin- $\uparrow$ electrons ($N_{\uparrow}$) and the total number of spin- $\downarrow$ electrons ($N_{\downarrow}$). This means that to find the ground state with specific $N_{\uparrow}$ and $N_{\downarrow}$, we need to start in a state with the same $N_{\uparrow}$ and $N_{\downarrow}$.

In fermion language, the ground state of Eq. (7) in a subspace with given values of $N_{\uparrow}$ and $N_{\downarrow}$ reads

$$|\psi(0)\rangle = c_{k_1\uparrow}^{\dagger} c_{k_2\uparrow}^{\dagger} \cdots c_{k_{N_{\uparrow}}\uparrow}^{\dagger} \cdots c_{k_{N_{\downarrow}}\downarrow}^{\dagger} |V\rangle, \quad (14)$$

where $|V\rangle$ is the fermion vacuum state (all zeros) and the k 's are chosen so that $\sum \epsilon_k$ is the minimum. For a simple example, see Fig. 1.

Substituting Eq. (12) into Eq. (14), we obtain the initial ground state $|\psi(0)\rangle$ in terms of the fermion operators for which we defined the Jordan-Wigner transformation by Eq. (10). This enables us to write the ground-state equation (14) in the computational basis and subsequently prepare it using Givens rotations as discussed in Appendix A.

Being equipped with a circuit that prepares the initial state, we are now in a position to perform quantum annealing starting from this state. The next subsection outlines how

we construct the quantum circuit for the quantum annealing process itself.

C. Time evolution

To simulate quantum annealing, we need to solve the TDSE given by Eq. (9). The general solution is given by a unitary operator that transforms the initial state to a state $|\psi(t)\rangle$ at time t ,

$$|\psi(t)\rangle = U(t, t_0) |\psi(t_0)\rangle. \quad (15)$$

If the Hamiltonian H is time-independent, the operator U is given by

$$U(t, t_0) = e^{-iH(t-t_0)}, \quad (16)$$

where we have set $\hbar = 1$.

The Hamiltonian equation (11) is time-dependent through the time dependence of $s = t/T_A$, where T_A is the total quantum annealing time. However, if we approximate $H(s)$ as piecewise constant, the time evolution operator can be well approximated by

$$U(T_A, 0) \approx \prod_{n=1}^{n=T_A/\tau} e^{-i\tau H(n\tau-\tau/2)} \quad (17)$$

for a small time step τ [37].

The task of simulating the Schrödinger dynamics has been reduced to calculating the exponential $e^{-i\tau H(n\tau-\tau/2)}$, and a quantum circuit needs to be constructed for this exponential. Constructing a circuit that performs this operation on the state of a quantum computer exactly is not trivial. Moreover, we want circuits that can be realized with one-qubit and two-qubit gates since potential quantum computing architectures might be able to implement these. This means that we need a way to decompose the full unitary evolution into unitary gates that operate on at most two qubits.

We use the Suzuki-Trotter approximation [38,39] in which, by using a small enough τ , the exponential of a Hamiltonian can be well approximated by a product of exponentials of each term H_j in the Hamiltonian. For each small time step τ [37,40],

$$e^{-i\tau \sum_j H_j(n\tau-\tau/2)} \approx \prod_j e^{-i\tau H_j(n\tau-\tau/2)}, \quad (18)$$

which is the first-order Suzuki-Trotter approximation. The approximation can be improved by using the second-order Suzuki-Trotter approximation [41,42],

$$e^{-i\tau \sum_j H_j(n\tau-\tau/2)} \approx \prod_{j=1}^l e^{-i\tau/2 H_j(n\tau-\tau/2)} \prod_{k=1}^l e^{-i\tau/2 H_{l-k+1}(n\tau-\tau/2)}, \quad (19)$$

where l is the number of terms in the Hamiltonian.

We use Eq. (19) to simulate the evolution of a system governed by the annealing Hamiltonian $H(s)$. A key step in this process is identifying and grouping mutually commuting terms within $H(s)$. Doing so not only mitigates errors arising from noncommutativity but also enables the design of more efficient quantum circuits. Below, we introduce a

natural grouping scheme that respects the intrinsic symmetries of $H(s)$. We introduce

$$\begin{aligned} XY_1 &= \sum_{\substack{i \text{ odd} \\ i \neq L}}^{2L-1} (X_i X_{i+1} + Y_i Y_{i+1}), \\ XY_2 &= \sum_{\substack{i \text{ even} \\ i \neq L}}^{2L-1} (X_i X_{i+1} + Y_i Y_{i+1}), \\ ZZ &= \sum_{i=1}^L (I - Z_i)(I - Z_{i+L}). \end{aligned} \quad (20)$$

This choice exactly preserves $N_\uparrow$ and $N_\downarrow$, as should be the case with the exact time evolution. However, since the time step τ is chosen to be sufficiently small, $N_\uparrow$ and $N_\downarrow$ will be approximately preserved also with other groupings. Therefore, we adopt the alternative grouping,

$$\begin{aligned} XX &= \sum_{\substack{i=1 \\ i \neq L}}^{2L-1} X_i X_{i+1}, \\ YY &= \sum_{\substack{i=1 \\ i \neq L}}^{2L-1} Y_i Y_{i+1}, \\ ZZ &= \sum_{i=1}^L (I - Z_i)(I - Z_{i+L}), \end{aligned} \quad (21)$$

which provides a substantial reduction of the total number of gates over the choice above, facilitating more efficient circuits. Since for the Pauli matrices σ_i^α with direction α that act on qubit i , $[\sigma_i^\alpha \sigma_j^\alpha, \sigma_m^\alpha \sigma_n^\alpha] = 0$, the operations e^{-iXX} , e^{-iYY} , and e^{-iZZ} can be decomposed exactly.

We use the following universal gate set to decompose these unitary operators:

$$\begin{aligned} H &= \frac{1}{\sqrt{2}} \begin{pmatrix} 1 & 1 \\ 1 & -1 \end{pmatrix}, \\ \pm X &= \frac{1}{\sqrt{2}} \begin{pmatrix} 1 & \pm i \\ \pm i & 1 \end{pmatrix}, \\ RZ(\theta) &= e^{-i\frac{\theta}{2}Z} = \begin{pmatrix} e^{-i\frac{\theta}{2}} & 0 \\ 0 & e^{i\frac{\theta}{2}} \end{pmatrix}, \\ RZZ(\theta) &= e^{-i\theta ZZ} = \begin{pmatrix} e^{-i\theta} & 0 & 0 & 0 \\ 0 & e^{i\theta} & 0 & 0 \\ 0 & 0 & e^{i\theta} & 0 \\ 0 & 0 & 0 & e^{-i\theta} \end{pmatrix}. \end{aligned} \quad (22)$$

Now we can write

$$\begin{aligned} e^{-i\theta XX} &= \prod_{\substack{i=1 \\ i \neq L}}^{2L-1} e^{-i\theta X_i X_{i+1}} = \prod_{\substack{i=1 \\ i \neq L}}^{2L-1} e^{-i\theta H_i H_{i+1} Z_i Z_{i+1} H_i H_{i+1}} \\ &= \prod_{\substack{i=1 \\ i \neq L}}^{2L-1} H_i H_{i+1} e^{-i\theta Z_i Z_{i+1}} H_i H_{i+1} \end{aligned}$$

$$\begin{aligned} &= \prod_{i=1}^{2L} H_i \prod_{\substack{i=1 \\ i \neq L}}^{2L-1} e^{-i\theta Z_i Z_{i+1}} \prod_{i=1}^{2L} H_i \\ &= \prod_{i=1}^{2L} H_i \prod_{\substack{i=1 \\ i \neq L}}^{2L-1} RZZ_{i,i+1}(\theta) \prod_{i=1}^{2L} H_i. \end{aligned} \quad (23)$$

Similarly,

$$e^{-i\theta YY} = \prod_{i=1}^{2L} (+X_i) \prod_{\substack{i=1 \\ i \neq L}}^{2L-1} RZZ_{i,i+1}(\theta) \prod_{i=1}^{2L} (-X_i) \quad (24)$$

and

$$\begin{aligned} e^{-i\theta ZZ} &= \prod_{i=1}^{2L} e^{i\theta Z_i} \prod_{i=1}^L e^{-i\theta Z_i Z_{i+L}} \\ &= \prod_{i=1}^{2L} RZ_i(-2\theta) \prod_{i=1}^L RZZ_{i,i+L}(\theta). \end{aligned} \quad (25)$$

For an intermediate point s of the linear annealing schedule, from Eq. (19), the time evolution for the piecewise constant Hamiltonian can then be approximated by

$$e^{-i\tau \sum_j H_j(s)} \approx e^{i\frac{\tau}{4}XX} e^{-i\frac{\tau}{8}ZZ} e^{i\frac{\tau}{2}YY} e^{-i\frac{\tau}{8}ZZ} e^{i\frac{\tau}{4}XX}. \quad (26)$$

Then, from Eq. (17), the decomposition of the full unitary operator that simulates quantum annealing can be approximated by

$$\begin{aligned} U(T_A, 0) &\approx e^{i\frac{\tau}{4}XX} e^{-i\frac{2U\tau T_A - U\tau^2}{16T_A}ZZ} e^{i\frac{\tau}{2}YY} \\ &\times e^{-i\frac{2U\tau T_A - U\tau^2}{16T_A}ZZ} e^{i\frac{\tau}{2}XX} \dots e^{i\frac{\tau}{2}YY} e^{-i\frac{3U\tau^2}{16T_A}ZZ} \\ &\times e^{i\frac{\tau}{2}XX} e^{-i\frac{U\tau^2}{16T_A}ZZ} e^{i\frac{\tau}{2}YY} e^{-i\frac{U\tau^2}{16T_A}ZZ} e^{i\frac{\tau}{4}XX}. \end{aligned} \quad (27)$$

The number of Suzuki-Trotter steps is T_A/τ (chosen to be an integer) and each step can be seen to have one $e^{i\theta_1 XX}$ and $e^{i\theta_1 YY}$ operation, and two $e^{-i\theta_2 ZZ}$ operations. The number of one-qubit gates of one time step is thus $4L + 4L + 2 \times 2L = 12L$ and the number of two-qubit gates is $2(L-1) + 2(L-1) + 2 \times L = 6L - 4$. The total number of gates required to perform quantum annealing for a given T_A is therefore $(T_A/\tau)(18L - 4)$.

In summary, the product-formula algorithm allows us to perform gate-based quantum annealing simulations by a circuit the size of which scales linearly with system size. The amount of resources required to obtain a reasonable estimate of the ground state of the one-dimensional Hubbard Hamiltonian then depends on how the required total annealing time $T_A(L)$ scales with the problem size. The total number of gates required to find the ground state is then $\mathcal{O}(L \times T_A(L))$. Discovering how $T_A(L)$ grows with system size allows us to gauge how the amount of quantum computer resources scales with the problem size.

IV. RESULTS AND ANALYSIS

The methods discussed in the previous section for performing simulations of gate-based quantum annealing for the

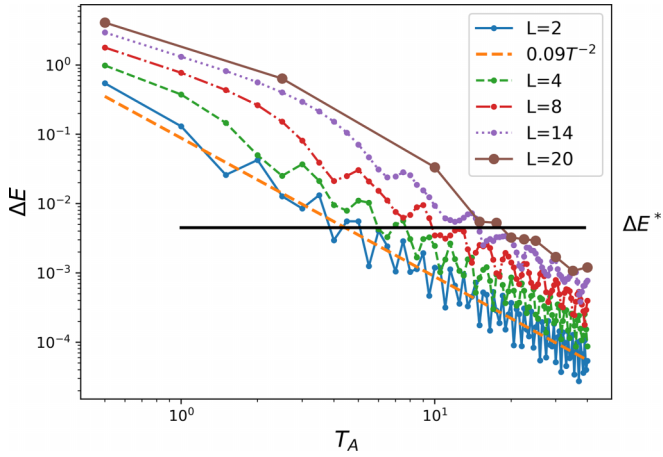


FIG. 2. ΔE as a function of T_A for a linear annealing schedule with $U/t_H = 4$.

problem under consideration can be used to calculate a metric to study the scaling behavior of quantum annealing to find the ground state of the Hubbard model. For the largest particle number subspaces, corresponding to $2N_\downarrow = N = L$, we use the quantum annealing algorithm to find the ground state of the Hamiltonian equation (1). By doing this for increasing L , we infer a scaling of required annealing time from the information of the final quantum state.

We construct complete circuits as described in the preceding sections for the simulation of the annealing Hamiltonian equation (8). We do this for systems as large as 20 sites or 40 qubits and for a range of total annealing times (T_A). We use the Jülich Universal Quantum Computer Simulator [43,44], which is a high-performance program to simulate universal quantum circuits. The simulations were performed on the JUWELS-booster [45] machine at the Jülich Supercomputing Center.

One time step of the quantum annealing algorithm of a 40-qubit system requires 356 gates. For the largest annealing time considered ($T_A = 40$) and a time step of $\tau = 0.025$, the

number of time steps is 1600 and the corresponding number of gates is 569 600. Including initial state preparation, the total number of gates in the circuit is then 570 918. This problem is simulated on 256 nodes of the JUWELS-Booster using 1024 graphics processing units (GPUs) and a total computing time of approximately 12 h.

From the final state $|\psi(s=1)\rangle$ obtained by the simulation, the program calculates the energy $\langle\psi(1)|H_H|\psi(1)\rangle$. We do this for a range of T_A , and we obtain the energy of the final state as a function of total annealing time.

We consider the residual energy as a metric to quantify the proximity of the state obtained after quantum annealing to the exact ground state. Figure 2 shows the residue $\Delta E = \langle\psi(1)|H_H|\psi(1)\rangle - E_0(L)$ versus T_A for a few system sizes. The exact ground-state energy $E_0(L)$ is obtained through the numerical solution of the Bethe-ansatz equations, as outlined in Appendix B, where we also present the scaling of the required computation time with system size. Table I shows the ground-state energies found by the Bethe-ansatz equations, the Lanczos algorithm, and quantum annealing for $L = 2$ to $L = 20$, $2N_\downarrow = N = L$, and $U/t_H = 4, 8, 16$.

From Fig. 2, it follows that for a certain value of the energy residue that depends on system size, say $\epsilon(L)$, when $\Delta E \leq \epsilon(L)$, the following holds consistently across system sizes:

$$\Delta E \approx \frac{\alpha(L)}{T_A^2}. \quad (28)$$

From the right-hand side of Eq. (5), we expect that the transition probability should behave like T_A^{-2} for sufficiently long annealing times [46]. Clearly, the T_A dependence of the energy residue shows a similar behavior. The adiabatic theorem thus provides support for the observed T_A^{-2} behavior of the residue and $\epsilon(L)$ marks its onset.

We examine the time required by the quantum annealing algorithm to determine the ground-state energy with a certain prescribed precision ΔE^* (see Fig. 2). Then, there is a system size L^* for which the point of onset corresponds to $\epsilon(L^*) \approx \Delta E^*$. For all $L < L^*$, the required annealing

TABLE I. Ground-state energies determined by the Bethe-ansatz equations (BA), the Lanczos algorithm (LA), and quantum annealing (QA) for systems with $2N_\downarrow = N = L$. The energies for QA are found by using an annealing time $T_A = 40$ for $U/t_H = 4, 8$, and $T_A = 60$ for $U/t_H = 16$.

L	$U = 4t_H$			$U = 8t_H$			$U = 16t_H$		
	BA	LA	QA	BA	LA	QA	BA	LA	QA
2	-0.828 427	-0.8284	-0.8284	-0.472 136	-0.4721	-0.4717	-0.246 211	-0.2462	-0.2450
4	-1.953 145	-1.9531	-1.9531	-1.117 172	-1.1171	-1.1163	-0.582 635	-0.5826	-0.5799
6	-3.092 565	-3.0925	-3.0924	-1.768 099	-1.7680	-1.7668	-0.921 917	-0.9219	-0.9175
8	-4.235 807	-4.2358	-4.2354	-2.420 831	-2.4208	-2.4190	-1.262 136	-1.2621	-1.2557
10	-5.380 619	-5.3806	-5.3801	-3.074 389	-3.0743	-3.0718	-1.602 785	-1.6027	-1.5937
12	-6.526 243	-6.5262	-6.5256	-3.728 396	-3.7283	-3.7252	-1.943 669	-1.9436	-1.9319
14	-7.672 350	-7.6723	-7.6716	-4.382 676	-4.3826	-4.3786	-2.284 694	-2.2846	-2.2702
16	-8.818 767	-8.8187	-8.8179	-5.037 134	—	—	-2.625 814	—	—
18	-9.965 399	-9.9653	-9.9645	-5.691 715	—	—	-2.966 997	—	—
20	-11.112 185	-11.1121	-11.1110	-6.346 385	—	—	-3.308 227	—	—

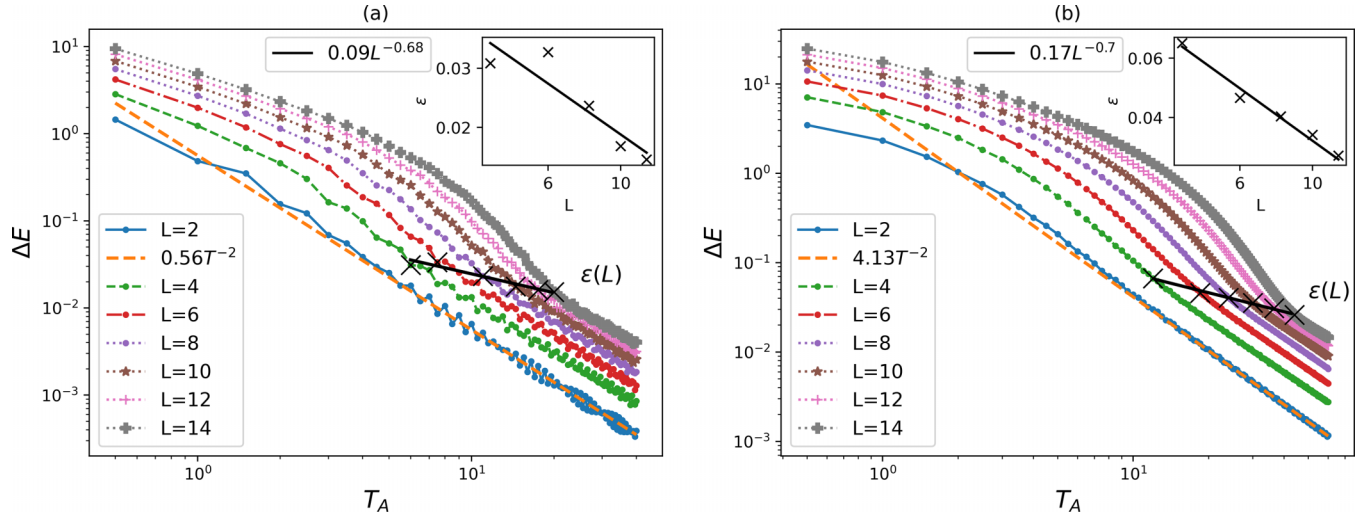


FIG. 3. ΔE as a function of T_A for a linear annealing schedule with (a) $U/t_H = 8$ and (b) $U/t_H = 16$. The crosses indicate onsets $\epsilon(L)$, which are plotted as a function of L in the inset.

time to obtain this precision can be determined from the L dependence of $\alpha(L)$.

We plot $\alpha(L)$ with respect to system size and show the result in Fig. 4. For $U/t_H = 4$, the plot fits very well to

$$\alpha(L) \propto L^{1.234}. \quad (29)$$

Substitution in Eq. (28) yields (for $\Delta E \leq \epsilon(L)$)

$$\Delta E \propto \frac{L^{1.234}}{T_A^2}, \quad (30)$$

which means that to obtain the ground-state energy with a specified precision $\Delta E^* \approx \epsilon(L^*)$,

$$T_A \propto \frac{L^{0.62}}{\sqrt{\Delta E^*}}, \quad (31)$$

where $L < L^*$.

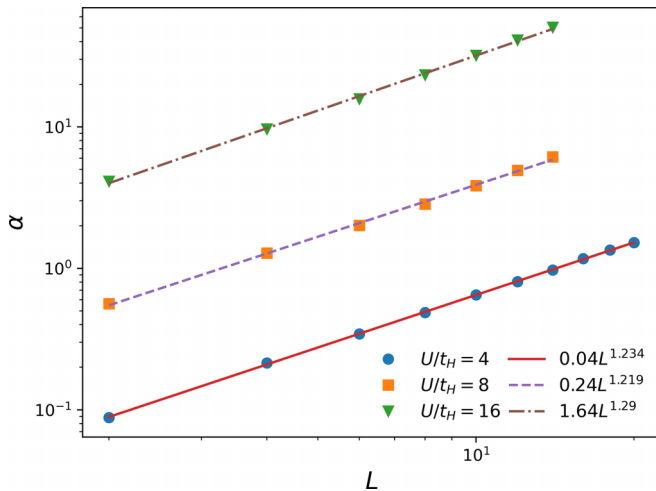


FIG. 4. $\alpha(L)$ as a function of L for a linear annealing schedule and $U/t_H = 4, 8, 16$.

The largest systems up to which Eq. (31) holds depends on the scaling of $\epsilon(L)$ with system size. If $\epsilon(L)$ remains constant or decreases polynomially, then the annealing time to obtain the ground-state energy with specified precision ΔE^* only grows polynomially. For a system size L for which $\epsilon(L) < \Delta E^*$, the time required to obtain this precision to the ground state is less than the time required for the onset of the T_A^{-2} regime.

Thus, assuming that

$$\alpha(L) \propto L^a \quad \text{and} \quad \epsilon(L) \propto L^{-b},$$

then for $L > L^*$, where $\Delta E^* > \epsilon(L)$, we have from Eq. (28),

$$T_A < T'_A \approx \sqrt{\frac{\alpha(L)}{\epsilon(L)}} \propto L^{(a+b)/2}, \quad (32)$$

where T_A is the annealing time to obtain the ground-state energy with precision ΔE^* and T'_A is the annealing time to achieve a T_A^{-2} behavior of the energy residue.

From the simulation data for $U/t_H = 4$, $\epsilon(L)$ cannot be determined with sufficient accuracy. However, Fig. 2 already suggests a benign scaling of the onset, which alludes to a polynomial scaling of annealing time for large system sizes. In Appendix C, we show that similar results and analysis for a sinusoidal annealing schedule hold.

To check the performance of quantum annealing in the strong coupling regime, we perform simulations for $U/t_H = 8, 16$. Figures 3(a) and 3(b) show the behavior of the residual energies for $U/t_H = 8$ and $U/t_H = 16$, respectively. The insets show the corresponding estimates for the onsets $\epsilon(L)$ from which we find that

$$\epsilon(L) \sim L^{-0.7} \quad (33)$$

providing evidence for the benign scaling of the onset points with system size.

Figure 4 shows the scaling of $\alpha(L)$ for $U/t_H = 4, 8, 16$. The parallel lines are suggestive of a consistent scaling with L

dependence. For $U/t_H = 16$,

$$\alpha(L) \propto L^{1.29}. \quad (34)$$

Combining these results to extrapolate the scaling of required T_A to arbitrarily large L , we find from Eq. (32) that

$$T_A < T'_A \propto L. \quad (35)$$

To calculate the ground-state energy in practice requires performing measurements on the quantum device and sampling the outcomes. Since H_H contains three groups of commuting terms, the quantum annealing process needs to be performed $3N_S$ times, where N_S is the number of samples that depends on the desired precision of the measurement. Nevertheless, this does not affect the L dependence of the required total time to calculate the ground-state energy, which is $3N_S \times T_A(L)$.

Computing the ground state up to a residual energy of ΔE^* by quantum annealing, this residue will approximately correspond to $\epsilon(L^*)$ for a certain large L^* . From the above arguments, it follows that for system sizes $L < L^*$, quantum annealing yields the ground state of the half-filled one-dimensional Hubbard model in sublinear time. For arbitrarily large $L > L^*$, the required annealing time is bounded by a linear function of system size.

V. DISCUSSION AND OUTLOOK

Integrable quantum systems usually have a set of coupled equations that solve the eigenvalue problem of the system exactly. However, to solve these equations, one has to resort to numerical means that require time, which is polynomial in the number of equations. For the one-dimensional Hubbard model with open boundaries, the equations that need to be solved to find the ground state are the Bethe-ansatz equations (2) and (3). Once solved, the roots can be used to calculate the ground-state energy, as well as the ground-state coefficients that grow exponentially in number, requiring exponential computer resources. Our analysis of the scaling of required time to find the ground-state energy using quantum annealing suggests at least a polynomial quantum speedup over solving the Bethe-ansatz equations. Even though the problem is *solved* in the thermodynamic limit, demonstrating an improvement using a quantum algorithm for obtaining the ground state reinforces our hope toward the paradigm of quantum computing for solving quantum many-body problems.

Quantum annealing is currently being studied extensively for solving various quantum and classical problems [14–17, 19–24]. There are problems for which we see promise [19–21], and there are problems for which quantum annealing does not seem to bring any advantage [22]. By approaching quantum many-body problems like the Hubbard model with the algorithm of quantum annealing and investigating its performance, we are able to add significant strength to the promise of the utility of adiabatic quantum computing and quantum annealing.

We find two regimes of scaling depending on the required precision ΔE^* to find the ground-state energy. For system size $L < L^*$, where L^* is the system size for which ΔE^* corresponds to the onset of the T_A^{-2} behavior of the residual energy,

the obtained time complexity is $\mathcal{O}(L^{0.62})$ and the fits in Fig. 4 provide compelling evidence for this scaling. For the $L > L^*$ regime, the scaling estimates are coarse but still suggestive of a bound on the annealing time that is linear in L . Nevertheless, ΔE^* can be chosen to be arbitrarily small, in which case L^* becomes very large. In practice, to obtain a highly precise estimate of the ground state, a sublinear increase of required annealing time would suffice even for large systems.

Such a scaling behavior of the required annealing time can be understood to appear as a consequence of the absence of phase transitions in the one-dimensional Hubbard model at nonzero U [3, 6]. This means that the dominant gap closing in the spectrum of the annealing Hamiltonian is at $s = 0$ [30]. Since the gap at $s = 0$ decreases linearly, a polynomial scaling of required annealing time is to be expected.

Resource requirements for the considered implementation on a universal quantum computer also show promise for future fault-tolerant architectures. Since the number of gates grows linearly for one Suzuki-Trotter step, the total number of gates for finding a near-precise ground state scales like $\mathcal{O}(L^{1.62})$. Furthermore, the gate depth is constant per Suzuki-Trotter step for the one-dimensional case, which means that the depth also scales like $\mathcal{O}(L^{0.62})$. Even though such computations with thousands of gates might not be a near-term possibility, the scaling of resources augurs well for the era of fault tolerance. On the other hand, analog devices with capabilities of simulating Hubbard-like Hamiltonians [47–49] might also turn out to be useful in the near future.

Showing evidence of a polynomial scaling advantage for an integrable quantum system also invites inquiry into the power of quantum annealing for solving nonintegrable quantum many-body systems. However, nonintegrable quantum systems, like the two-dimensional Hubbard model, are expected to show the presence of phase transitions. Depending on the order of these phase transitions, the minimum gap in the spectrum of the annealing Hamiltonian can be either exponentially or polynomially decreasing. Considering this, a quantum speedup for solving the one-dimensional Hubbard model does not necessarily suggest a similar benefit for multidimensional many-body quantum systems.

To investigate the above, quantum annealing can be implemented on a quantum computer to find the ground state of the two-dimensional Hubbard model using the Jordan-Wigner transformation. The corresponding qubit Hamiltonian contains Pauli strings that have a length of $\mathcal{O}(L_s)$, where L_s is the linear dimension of a square lattice. The time evolution with respect to a given Pauli string is then achieved by using a ladder of CNOT gates between the qubits on which it acts. The idea presented in this paper can, in principle, be applied to study the scaling for a two-dimensional system as well. However, a necessary ingredient for our analysis is the exact value of the ground state energy, which cannot be found for square lattices larger than $L_s = 5$. On the other hand, the analysis can be carried out for the Hubbard model having a ladder geometry for which one can go up to a relatively larger linear dimension, and indications of a scaling behavior might still be accessible.

Nonetheless, the question of a quantum advantage using quantum annealing for such systems is still open, and the

potential of it persists. Our results drive us to look further into problems like Hubbard models in more dimensions. If not for solving them, quantum annealing can also provide a gateway to understanding phase transitions in these models [30].

ACKNOWLEDGMENTS

The authors gratefully acknowledge the Gauss Centre for Supercomputing e.V. for funding this project by providing computing time through the John von Neumann Institute for Computing (NIC) on the GCS Supercomputer JUWELS at Jülich Supercomputing Centre (JSC). This work was supported by the Deutsche Forschungsgemeinschaft (DFG; German Research Foundation) within the Research Unit FOR 2692 under Grant No. 355031190.

DATA AVAILABILITY

The data that support the findings of this article are not publicly available upon publication because it is not technically feasible and/or the cost of preparing, depositing, and hosting the data would be prohibitive within the terms of this research project. The data are available from the authors upon reasonable request.

APPENDIX A: GIVENS ROTATIONS

We follow the method of preparing the initial state using Givens rotations as given in Refs. [30,31].

It can be seen from Eq. (12) that the initial state is decoupled in the spin degrees of freedom. This means that we can prepare the state of the first L qubits independently from the state of the last L qubits. Hence, we suppress the spin index and write a matrix equation like the following:

$$\begin{pmatrix} c_{k_1}^\dagger \\ \vdots \\ c_{k_N}^\dagger \end{pmatrix} = Q \begin{pmatrix} c_1^\dagger \\ \vdots \\ c_N^\dagger \end{pmatrix}, \quad (\text{A1})$$

where Q is defined by the transformation in Eq. (12). The matrix Q can be decomposed into a sequence of Givens rotations that act on creation operators of neighboring sites [30,31], where a Givens rotation is defined as

$$G_{i,i+1}(\theta) = \begin{pmatrix} \cos \theta & \sin \theta \\ -\sin \theta & \cos \theta \end{pmatrix}, \quad (\text{A2})$$

and the angles are calculated as shown in Ref. [31].

To see how these Givens rotations that transform the creation operators could be used to prepare the initial state, define $\mathcal{G}_{i,i+1}(\theta)$ by

$$\mathcal{G}_{i,i+1}(\theta) = e^{\theta(c_i^\dagger c_{i+1} - c_{i+1}^\dagger c_i)}. \quad (\text{A3})$$

It can be shown that

$$\begin{pmatrix} \mathcal{G}_{i,i+1}(\theta) c_i^\dagger \mathcal{G}_{i,i+1}^\dagger(\theta) \\ \mathcal{G}_{i,i+1}(\theta) c_{i+1}^\dagger \mathcal{G}_{i,i+1}^\dagger(\theta) \end{pmatrix} = G_{i,i+1}(\theta) \begin{pmatrix} c_i^\dagger \\ c_{i+1}^\dagger \end{pmatrix}. \quad (\text{A4})$$

This means that the required initial state is prepared by transforming a computational basis state by a sequence of

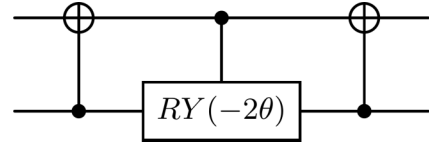


FIG. 5. Quantum circuit for implementing a Givens rotation on neighboring qubits.

$\mathcal{G}_{i,i+1}(\theta)$ corresponding to the sequence of $G_{i,i+1}(\theta)$ that is a decomposition of the matrix Q . If we have a fermion state for a system with $L = 5$ and $N = 3$ as $|11100\rangle$, then from Eqs. (A2) and (A4),

$$\begin{aligned} \mathcal{G}_{3,4}(\theta) |11100\rangle &= \mathcal{G}_{3,4}(\theta) c_1^\dagger c_2^\dagger c_3^\dagger |V\rangle = \mathcal{G}_{3,4}(\theta) c_1^\dagger \mathcal{G}_{3,4}^\dagger(\theta) \\ &\times \mathcal{G}_{3,4}(\theta) c_2^\dagger \mathcal{G}_{3,4}^\dagger(\theta) \mathcal{G}_{3,4}(\theta) c_3^\dagger \mathcal{G}_{3,4}^\dagger(\theta) |V\rangle \\ &= c_1^\dagger c_2^\dagger (\mathcal{G}_{3,4}(\theta) \mathbf{c}^\dagger)_3 |V\rangle \\ &= c_1^\dagger c_2^\dagger (\cos(\theta) c_3^\dagger + \sin(\theta) c_4^\dagger) |V\rangle \\ &= \cos(\theta) |11100\rangle + \sin(\theta) |11010\rangle, \end{aligned}$$

where $\mathbf{c}^\dagger = (c_1^\dagger \dots c_N^\dagger)^T$.

A circuit that implements a Givens rotation on two neighboring qubits can be constructed as shown in Fig. 5. Once the sequence of Givens rotations is known, the full circuit that prepares the initial state can be constructed. Figure 6 shows a circuit that prepares the initial state for a system of spin- $\frac{1}{2}$ fermions with $L = 5$, $N_\uparrow = 3$, and $N_\downarrow = 2$.

APPENDIX B: SOLVING THE BETHE-ANSATZ EQUATIONS

In order to calculate the residual energies for the problems considered, we need to obtain the corresponding values of the exact ground-state energies $E_0(L, N, N_\downarrow)$ by solving the Bethe-ansatz equations. There is no known analytical solution for these coupled algebraic equations due to their nonlinearity. However, they are quite tractable numerically. We use standard software packages that solve nonlinear equations and find the roots of Eqs. (2) and (3).

We are interested in finding the ground-state energy of the half-filled Hubbard model ($2N_\downarrow = N = L$) for a range of

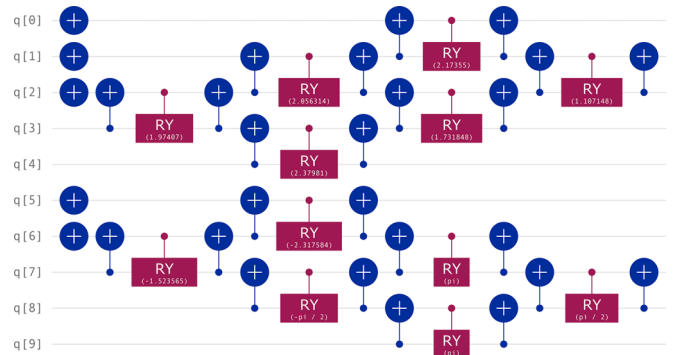


FIG. 6. Circuit that prepares the ground state of Eq. (7) for $L = 5$, $N_\uparrow = 3$, and $N_\downarrow = 2$.

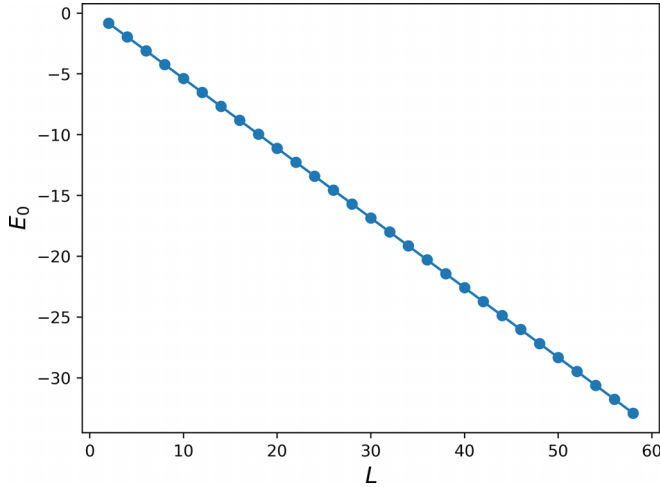


FIG. 7. E_0 as a function of L for Hubbard Hamiltonians with $2N_\downarrow = N = L$ and $U = 4t_H$.

system sizes L . We thus calculate $E_0(L) = E_0(L, N = L, N_\downarrow = L/2)$ using Eq. (4) and the obtained roots $\{k_1, k_2, \dots, k_L\}$. Figure 7 shows the L dependence of $E_0(L)$.

To get an idea of how the implemented root-finding algorithm performs to find the ground-state energy, we plot the time the computer program takes to find the roots of the Bethe-ansatz equations for each L in Fig. 8. Clearly, the data can be fit to

$$T_{BA} \propto L^{3.3}, \quad (\text{B1})$$

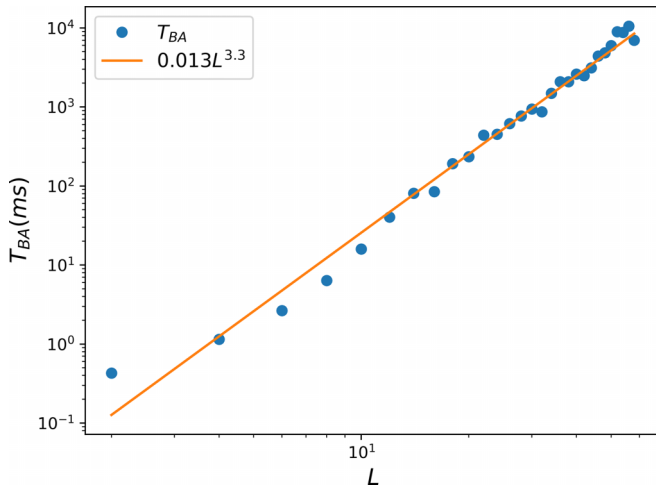


FIG. 8. The computation time T_{BA} to solve the Bethe-ansatz equations as a function of L for Hubbard Hamiltonians with $2N_\downarrow = N = L$ and $U = 4t_H$.

indicating the polynomial growth of the required time to find the ground-state energy by solving the Bethe-ansatz equations (2) and (3).

APPENDIX C: SINUSOIDAL SCHEDULE

We repeat the simulations for the annealing schedule with a sinusoidal dependence on s . Namely,

$$H(s) = -t \sum_{\langle i,j \rangle, \sigma} (c_{i\sigma}^\dagger c_{j\sigma} + c_{j\sigma}^\dagger c_{i\sigma}) + \frac{\sin(\pi s - \frac{\pi}{2}) + 1}{2} U \sum_i n_{i\uparrow} n_{i\downarrow}. \quad (\text{C1})$$

For such a schedule with $\dot{H}(0) = \dot{H}(1) = 0$, the dependence of the bound in Eq. (5) changes to [35,46,50]

$$1 - |\langle \phi_0(1) | \psi(1) \rangle|^2 \leq \frac{\kappa}{T_A^4}, \quad (\text{C2})$$

where κ is independent of T_A , and thus, we also expect a T_A^{-4} behavior of ΔE for large T_A . Figure 9(a) shows this behavior, where we see for a system-size-dependent onset $\epsilon(L)$, when $\Delta E \leq \epsilon(L)$,

$$\Delta E \approx \frac{\alpha(L)}{T_A^4}. \quad (\text{C3})$$

In Fig. 9(b), we plot the simulation data for $\alpha(L)$ with $L = 2$ to $L = 16$. We obtain

$$\alpha(L) \propto L^{2.478}. \quad (\text{C4})$$

By substituting in Eq. (C3), we find (for $\Delta E \leq \epsilon(L)$)

$$\Delta E \propto \frac{L^{2.478}}{T_A^4}. \quad (\text{C5})$$

For a required precision to the ground-state energy $\Delta E^* \approx \epsilon(L^*)$, we have

$$T_A \propto \frac{L^{0.62}}{\sqrt{\Delta E^*}}, \quad (\text{C6})$$

where $L < L^*$.

For this case also, $\epsilon(L)$ could not be determined accurately. However, an indication of a polynomial scaling of the onset is still apparent in Fig. 9(a). For $L < L^*$, we see a sublinear scaling of T_A with system size, with the same exponent for two different annealing schedules.

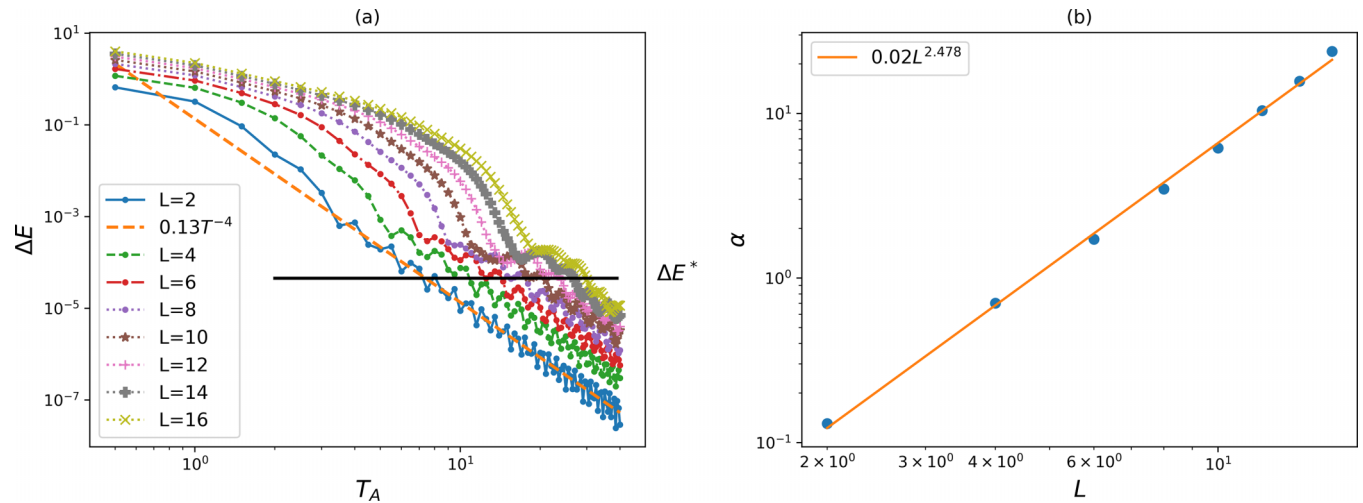


FIG. 9. (a) ΔE as a function of T_A and (b) $\alpha(L)$ as a function of L for a sinusoidal annealing schedule with $U/t_H = 4$.

- [1] J. Hubbard, Electron correlations in narrow energy bands, *Proc. R. Soc. London A* **276**, 238 (1963).
- [2] F. H. L. Essler, H. Frahm, F. Göhmann, A. Klümper, and V. E. Korepin, *The One-Dimensional Hubbard Model* (Cambridge University Press, Cambridge, 2005).
- [3] E. H. Lieb and F. Y. Wu, Absence of Mott transition in an exact solution of the short-range, one-band model in one dimension, *Phys. Rev. Lett.* **20**, 1445 (1968).
- [4] H. Bethe, Zur Theorie der Metalle. I. Eigenwerte und Eigenfunktionen der linearen Atomkette, *Z. Phys.* **71**, 205 (1931).
- [5] N. Andrei, Integrable models in condensed matter physics, in *Low-Dimensional Quantum Field Theories for Condensed Matter Physicists*, Series in Modern Condensed Matter Physics, edited by S. Lundqvist, G. Morandi, and Y. Lu (World Scientific, Singapore, 1995), Vol. 6, pp. 457–551.
- [6] H. Schulz, Hubbard chain with reflecting ends, *J. Phys. C* **18**, 581 (1985).
- [7] L. K. Grover, Quantum mechanics helps in searching for a needle in a haystack, *Phys. Rev. Lett.* **79**, 325 (1997).
- [8] A. Peruzzo, J. McClean, P. Shadbolt, M.-H. Yung, X.-Q. Zhou, P. J. Love, A. Aspuru-Guzik, and J. L. O'Brien, A variational eigenvalue solver on a photonic quantum processor, *Nat. Commun.* **5**, 4213 (2014).
- [9] C. Cade, L. Mineh, A. Montanaro, and S. Stanisic, Strategies for solving the Fermi-Hubbard model on near-term quantum computers, *Phys. Rev. B* **102**, 235122 (2020).
- [10] D. Wecker, M. B. Hastings, and M. Troyer, Progress towards practical quantum variational algorithms, *Phys. Rev. A* **92**, 042303 (2015).
- [11] J. S. Van Dyke, G. S. Barron, N. J. Mayhall, E. Barnes, and S. E. Economou, Preparing Bethe ansatz eigenstates on a quantum computer, *PRX Quantum* **2**, 040329 (2021).
- [12] W. Li, M. Okyay, and R. I. Nepomechie, Bethe states on a quantum computer: Success probability and correlation functions, *J. Phys. A: Math. Theor.* **55**, 355305 (2022).
- [13] T. Kadowaki and H. Nishimori, Quantum annealing in the transverse Ising model, *Phys. Rev. E* **58**, 5355 (1998).
- [14] E. Farhi, J. Goldstone, S. Gutmann, J. Lapan, A. Lundgren, and D. Preda, A quantum adiabatic evolution algorithm applied to random instances of an NP-complete problem, *Science* **292**, 472 (2001).
- [15] E. Farhi, J. Goldstone, S. Gutmann, and M. Sipser, Quantum computation by adiabatic evolution, [arXiv:quant-ph/0001106](https://arxiv.org/abs/quant-ph/0001106).
- [16] R. Martoňák, G. E. Santoro, and E. Tosatti, Quantum annealing of the traveling-salesman problem, *Phys. Rev. E* **70**, 057701 (2004).
- [17] J. Brooke, D. Bitko, T. F. Rosenbaum, and G. Aeppli, Quantum annealing of a disordered magnet, *Science* **284**, 779 (1999).
- [18] M. Lubasch, V. Murg, U. Schneider, J. I. Cirac, and M.-C. Bañuls, Adiabatic preparation of a Heisenberg antiferromagnet using an optical superlattice, *Phys. Rev. Lett.* **107**, 165301 (2011).
- [19] H. Munoz-Bauza and D. Lidar, Scaling advantage in approximate optimization with quantum annealing, *Phys. Rev. Lett.* **134**, 160601 (2025).
- [20] R. D. Somma, D. Nagaj, and M. Kieferová, Quantum speedup by quantum annealing, *Phys. Rev. Lett.* **109**, 050501 (2012).
- [21] T. Albash and D. A. Lidar, Demonstration of a scaling advantage for a quantum annealer over simulated annealing, *Phys. Rev. X* **8**, 031016 (2018).
- [22] V. Mehta, F. Jin, H. De Raedt, and K. Michielsen, Quantum annealing for hard 2-satisfiability problems: Distribution and scaling of minimum energy gap and success probability, *Phys. Rev. A* **105**, 062406 (2022).
- [23] T.-J. Hsu, F. Jin, C. Seidel, F. Neukart, H. D. Raedt, and K. Michielsen, Quantum annealing with anneal path control: Application to 2-SAT problems with known energy landscapes, *Commun. Comput. Phys.* **26**, 928 (2025).
- [24] E. Farhi and A. W. Harrow, Quantum supremacy through the quantum approximate optimization algorithm, [arXiv:1602.07674](https://arxiv.org/abs/1602.07674).
- [25] R. P. Feynman, Simulating physics with computers, *Int. J. Theor. Phys.* **21**, 467 (1982).

- [26] A. Smith, M. S. Kim, F. Pollmann, and J. Knolle, Simulating quantum many-body dynamics on a current digital quantum computer, *npj Quantum Inf.* **5**, 106 (2019).
- [27] C. Gross and I. Bloch, Quantum simulations with ultracold atoms in optical lattices, *Science* **357**, 995 (2017).
- [28] H. Bernien, S. Schwartz, A. Keesling, H. Levine, A. Omran, H. Pichler, S. Choi, A. S. Zibrov, M. Endres, M. Greiner, V. Vuletić, and M. D. Lukin, Probing many-body dynamics on a 51-atom quantum simulator, *Nature (London)* **551**, 579 (2017).
- [29] R. Harris, Y. Sato, A. J. Berkley, M. Reis, F. Altomare, M. H. Amin, K. Boothby, P. Bunyk, C. Deng, C. Enderud, *et al.*, Phase transitions in a programmable quantum spin glass simulator, *Science* **361**, 162 (2018).
- [30] D. Wecker, M. B. Hastings, N. Wiebe, B. K. Clark, C. Nayak, and M. Troyer, Solving strongly correlated electron models on a quantum computer, *Phys. Rev. A* **92**, 062318 (2015).
- [31] Z. Jiang, K. J. Sung, K. Kechedzhi, V. N. Smelyanskiy, and S. Boixo, Quantum algorithms to simulate many-body physics of correlated fermions, *Phys. Rev. Appl.* **9**, 044036 (2018).
- [32] J. Zhang, M.-H. Yung, R. Laflamme, A. Aspuru-Guzik, and J. Baugh, Digital quantum simulation of the statistical mechanics of a frustrated magnet, *Nat. Commun.* **3**, 880 (2012).
- [33] M. Born and V. Fock, Beweis des adiabatensatzes, *Z. Phys.* **51**, 165 (1928).
- [34] J. J. Sakurai and J. Napolitano, *Modern Quantum Mechanics* 3rd ed. (Cambridge University Press, Cambridge, 2020).
- [35] S. Jansen, M.-B. Ruskai, and R. Seiler, Bounds for the adiabatic approximation with applications to quantum computation, *J. Math. Phys.* **48**, 102111 (2007).
- [36] P. Jordan and E. Wigner, Über das Paulische Äquivalenzverbot, *Z. Phys.* **47**, 631 (1928).
- [37] M. Suzuki, General decomposition theory of ordered exponentials, *Proc. Jpn. Acad. Ser. B* **69**, 161 (1993).
- [38] H. F. Trotter, On the product of semi-groups of operators, *Proc. Am. Math. Soc.* **10**, 545 (1959).
- [39] M. Suzuki, Generalized Trotter's formula and systematic approximants of exponential operators and inner derivations with applications to many-body problems, *Commun. Math. Phys.* **51**, 183 (1976).
- [40] J. Huyghebaert and H. D. Raedt, Product formula methods for time-dependent Schrödinger problems, *J. Phys. A: Math. Gen.* **23**, 5777 (1990).
- [41] M. Suzuki, Decomposition formulas of exponential operators and Lie exponentials with some applications to quantum mechanics and statistical physics, *J. Math. Phys.* **26**, 601 (1985).
- [42] H. De Raedt, Product formula algorithms for solving the time dependent Schrödinger equation, *Comput. Phys. Rep.* **7**, 1 (1987).
- [43] K. De Raedt, K. Michielsen, H. De Raedt, B. Trieu, G. Arnold, M. Richter, T. Lippert, H. Watanabe, and N. Ito, Massively parallel quantum computer simulator, *Comput. Phys. Commun.* **176**, 121 (2007).
- [44] H. De Raedt, F. Jin, D. Willsch, M. Willsch, N. Yoshioka, N. Ito, S. Yuan, and K. Michielsen, Massively parallel quantum computer simulator, eleven years later, *Comput. Phys. Commun.* **237**, 47 (2019).
- [45] Jülich Supercomputing Centre, JUWELS cluster and booster: Exascale pathfinder with modular supercomputing architecture at Jülich Supercomputing Centre, *J. Large-Scale Res. Facilities* **7**, A183 (2021).
- [46] S. Morita and H. Nishimori, Mathematical foundation of quantum annealing, *J. Math. Phys.* **49**, 125210 (2008).
- [47] T. Esslinger, Fermi-Hubbard physics with atoms in an optical lattice, *Annu. Rev. Condens. Matter Phys.* **1**, 129 (2010).
- [48] T. Hensgens, T. Fujita, L. Janssen, X. Li, C. J. Van Diepen, C. Reichl, W. Wegscheider, S. Das Sarma, and L. M. K. Vandersypen, Quantum simulation of a Fermi-Hubbard model using a semiconductor quantum dot array, *Nature (London)* **548**, 70 (2017).
- [49] L. Tarruell and L. Sanchez-Palencia, Quantum simulation of the Hubbard model with ultracold fermions in optical lattices, *C. R. Phys.* **19**, 365 (2018).
- [50] B. W. Reichardt, The quantum adiabatic optimization algorithm and local minima, in *Proceedings of the 36th Annual ACM Symposium on Theory of Computing, STOC '04* (Association for Computing Machinery, New York, 2004), pp. 502–510.