

AtOM, an ontology model for standardizing use of brain atlases in tools, workflows, and data infrastructures

Authors

Heidi Kleven^{*1}, Thomas H. Gillespie^{*2}, Lyuba Zehl³, Timo Dickscheid^{3, 4}, Jan G. Bjaalie¹, Maryann E. Martone², Trygve B. Leergaard¹

Affiliations

1. Department of Molecular Medicine, Institute of Basic Medical Sciences, University of Oslo, Norway
2. Department of Neurosciences, University of California, San Diego, USA
3. Institute of Neuroscience and Medicine (INM-1), Research Centre Jülich, Germany
4. Institute of Computer Science, Heinrich Heine University Düsseldorf, Germany

* Shared first authorship

Correspondence to: Trygve B. Leergaard (t.b.leergaard@medisin.uio.no)

Abstract

Brain atlases are important reference resources for accurate anatomical description of neuroscience data. Open access, three-dimensional atlases serve as spatial frameworks for integrating experimental data and defining regions-of-interest in analytic workflows. However, naming conventions, parcellation criteria, area definitions, and underlying mapping methodologies differ considerably between atlases and across atlas versions. This lack of standardization impedes use of atlases in analytic tools and registration of data to different atlases. To establish a machine-readable standard for representing brain atlases, we identified four fundamental atlas elements, defined their relations, and created an ontology model. Here we present our Atlas Ontology Model (AtOM) and exemplify its use by applying it to mouse, rat, and human brain atlases. We propose minimum requirements for FAIR atlases and discuss how AtOM may facilitate atlas interoperability and data integration. AtOM provides a standardized framework for communication and use of brain atlases to create, use, and refer to specific atlas elements and versions. We argue that AtOM will accelerate analysis, sharing, and reuse of neuroscience data.

Introduction

Brain atlases are essential anatomical reference resources that are widely used for planning experimental work, interpreting and analyzing neuroscience data^{1–12}. Three-dimensional (3D) digital brain atlases^{11,13–17} are increasingly employed as frameworks for integrating, comparing, and analyzing data based on atlas-defined anatomical locations (e.g. Allen brain map, <https://portal.brain-map.org/>; the BRAIN Initiative Cell Census Network, <https://www.biccn.org/>; the EBRAINS research infrastructure, <https://ebrains.eu/>). These resources provide anatomical context suitable for brain-wide or region specific analysis using automated tools and workflows^{18–26} and facilitate sharing and using data in accordance with the FAIR principles²⁷, stating that data should be findable, accessible, interoperable, and reusable. However, the use and incorporation of different atlas resources in such workflows and infrastructures requires that atlases, tools, and data are interoperable, with relatively seamless exchange of standardized machine-readable information.

Most brain atlases share a set of common properties, but the specifications and documentation of their parts differ considerably. Detailed versioning is not yet common practice for all atlases, and lack of specific information about changes in the terminology or anatomical parcellation make it difficult to compare atlas versions. While some gold standards have been established²⁸, lack of consensus regarding the presentation, specification, and documentation of atlas contents hampers reproducible communication of locations⁹ and comparison of data that have been anatomically specified using different atlases^{8,24}. Atlases and their versions need to be uniquely identifiable and interoperable to enable researchers to communicate specific and reproducible location data and integrate data across specialized neuroscience fields and modalities.

To address the lack of standardization of atlas metadata, we identified four common atlas elements, defined their relations, and created the Atlas Ontology Model (AtOM). Here we characterize the properties and relations of the elements and explain their organization in AtOM. We argue that a given set of these elements, their relations, and metadata makes up a unique version of an atlas. Furthermore, we suggest a set of minimum requirements for atlases inspired by the FAIR principles, and discuss how atlases adhering to AtOM, could accelerate neuroscience data integration.

Results

We investigated a broad selection of mammalian brain atlases^{11,13,14,16,29–37} and identified four common elements: 1) a set of reference data, 2) a coordinate system, 3) a set of annotations and 4) a terminology. Below, we describe these atlas elements and their relations, exemplify how these elements specify unique versions of an atlas, and employ AtOM to suggest minimum requirements for FAIR brain atlases. The ontology model description is publicly available via GitHub: <https://github.com/SciCrunch/NIF-Ontology/blob/atlas/ttl/atom.ttl>.

The atlas elements

The atlas elements in AtOM are the reference data, coordinate system, annotation set, and terminology (Fig. 1a-c). Each of the four elements have properties, such as identifier, species, sex, and age, specified with detailed metadata (Fig. 1d).

The *reference data* of a brain atlas are graphical representations of one or several brains, or parts of brains, chosen as the biological reference for that atlas. The reference data often consist of histological or tomographic images. These images reflect different biological features of a selected specimen^{14,17,32,33}, a set of different subjects representing different features and image orientations³⁸, or a population average^{11,13,16}. The level of detail and size of brain regions that can be identified is determined by the spatial resolution of the reference data. For example, the widely adopted human reference datasets of the Montreal Neurological Institute (MNI)^{39,40} are based on averaged magnetic resonance imaging (MRI) scans and represent suitable reference data for macroanatomy, while the single-subject *BigBrain* model³¹ provides a reference dataset for identification of cortical layers and more fine-grained cortical and subcortical structures¹⁷.

The *coordinate system* of an atlas provides a framework for specifying locations with units, origin, direction, and orientation. The coordinate system is usually, but not always, a 3D Cartesian coordinate system. Examples of coordinate systems which go beyond a 3D Cartesian system are spatio-temporal systems, with additional time and surface dimensions⁴¹. In neuroscience, many coordinate systems are defined using characteristic features of the skull^{32,33} or specific anatomical landmarks identified within the brain^{14,42}.

The *annotation set* of an atlas consist of graphical marks or labels referring to spatial locations determined by features observed in, inferred from, or mapped onto the reference data, specifying structures or boundaries. An annotation set may demarcate anatomical boundaries or regions with lines, fully delineate them with closed curves^{11,14,32,33}, or directly

label coordinates with brain structures in the form of volumetric or surface maps. In the case of probabilistic maps, coordinates are labelled with the probabilities of a certain region or feature being present at a given location^{16,43–45}. Probabilistic maps are typically aggregated from annotations identified in different individuals, encoding variation across a number of subjects¹⁶.

The *terminology* of an atlas is a set of terms that identifies the annotations, providing human readability and context, and allowing communication about brain locations and structural properties. In its simplest form, a terminology can be a list of unique identifiers, but is typically a set of descriptive anatomical terms following specific conventions. Atlases employ different terms, conventions, and approaches to organizing brain structures into systems based on the methodology used to create them as well as their intended use cases. For example, some use developmental organization^{46,47}, while others use brain systems³⁷, microstructural organization¹⁷, multimodal features⁴⁸, or are specialized for particular brain regions^{49,50}. An atlas terminology may be a controlled vocabulary (flat list), a taxonomy and partonomy (hierarchical list), or an ontology (hierarchy and additional axioms).

Relations among the elements

The four elements of AtOM have specific relations (specified in Fig. 1f), sorted into a *spatial module*, consisting of the reference data and the coordinate system (Fig. 1b, yellow), and a *semantic module*, consisting of the annotation set and the terminology (Fig. 1b, blue).

The elements of the *spatial module* provide the physical and measurable dimensions of the atlas. The biological dimensions of the reference data give the conditions of operation for (i.e., *parameterize*) the coordinate system. The coordinate system provides a metric for (i.e., *measures*) the reference data, specifying the origin, orientation, and units (Fig. 1f). Coordinates are the means to derive measurements, indicate directions and spatially locate features in the reference data. The coordinate system also *measures* the annotation set, and thus connects the annotations to the features of the reference data.

The elements of the *semantic module* provide semantic identities for the atlas. The annotation set *parameterizes* the terminology in the spatial domain according to or inspired by the reference data. The terminology provides terms to establish the identity of (i.e., *identifies*) each annotation (Fig. 1f). While anatomical terms are not unique identifiers (see Atlas versioning below), they provide a means to semantically address annotations and conveying neuroanatomical knowledge and context (Fig. 1f). In this way, the terms are

semantic units suitable for navigating the atlas annotations, while annotations capture the scholarly interpretations and knowledge underlying the experimental and anatomical criteria used to make them (parcellation criteria). Further, the annotation set propagates the semantic identities from the terminology, and thus semantically *identifies* locations in the coordinate system.

The relations of the atlas elements are pathways for translating information between the spatial and semantic modules. A researcher may consult an atlas to observe the physical shape and location associated with a given anatomical term, or to identify the anatomical term assigned to specific coordinates, or biological features observed in the reference data. Thus, the model is a continuous, bidirectional loop providing several starting points for researchers to translate and compare information across atlas elements.

Atlas versioning

With an overview of the elements and relations of AtOM in hand, we are now in position to examine how they facilitate clear versioning of an atlas. In AtOM, an atlas version is a concrete instance of an atlas, and consists of specific elements, relations, and metadata (Fig. 1). Figure 2 and Table 1 shows the most recent versions of the EBRAINS supported mouse¹¹, rat¹⁴, and human¹⁶ brain atlases modeled using AtOM. An important consequence of AtOM is that the atlas version changes if there are alterations to any element. Examples of alterations include revising annotations or terms, modifying the reference data or coordinate system, or replacing an element. Such changes have consequences for the specific properties and use of an atlas, and should be specified as a new atlas version. The changes made from one version to another can be described in atlas version documentation, and new versions of an atlas are usually distinguished by a new version name. The simplest way to do this is by iterative version numbering. Table 2 shows a complete overview of all versions of the Allen Mouse Brain Atlas Common Coordinate Framework (AMBA CCF)^{11,13}, the Waxholm Space atlas of the Sprague Dawley rat brain (WHS rat brain atlas)^{14,36,37}, and selected alternative versions of the Julich-Brain Cytoarchitectonic Atlas (Julich-Brain Atlas)¹⁶. In the last versions of the AMBA CCF (v3 2015-2017)^{11,13,30,51-53} and the WHS rat brain atlas (v1.01-v4)^{14,29,36,37} the semantic elements (annotation set and terminology) have been changed across versions, while the spatial elements (reference data and coordinate system, Table 2) have been kept constant. This continuation across versions allows translation of information and experimental data

registered to the reference data are compatible with all versions of the mouse and rat atlas versions.

To clearly reference a specific atlas version or AtOM element, it needs a unique identifier (ID). This is particularly important when combining different versions of elements into alternative atlas versions. The major release v2.9 of the Julich-Brain Atlas (Table 2) has four alternative versions due to its use of four complementary spatial modules: the “MNI Colin 27” (individual specimen, 1 mm resolution), “MNI 152” (population average, 1mm resolution), “BigBrain” (individual specimen, 20 μ m resolution) and “fsaverage” (cortical surface representation)^{17,31,54–56}. These alternative versions are identified by combining the major release identifier (v2.9) with the abbreviated name of the respective reference data and coordinate systems. Unique identifiers are also important to differentiate between identical terms, which are often similar, but not identical, anatomical areas within and across species and atlases. Ambiguity can be avoided by indexing atlas version specific terms and providing unique ontology IDs defining their properties and relations. Following AtOM, an atlas version should have unique IDs for each element and their instances, which together with version documentation facilitate clear referencing of atlas versions and specific atlas elements (Fig. 1e).

Minimum requirements for FAIR brain atlases

Atlases are a type of research data and thus can be evaluated using the foundational principles of the FAIR guidelines²⁷. These principles state that data should be findable, accessible, interoperable, and reusable through both human and machine-driven activities. Similar to experimental data, atlases can support these principles through use of unique identifiers, specific metadata, open protocols, and clear usage licenses. Furthermore, interoperability and reuse of data also requires use of “formal, accessible, shared, and broadly applicable language for knowledge representation”, as well as metadata providing detailed descriptions. Based on our proposed ontology model, we suggest the following set of four minimum requirements for FAIR brain atlases: 1) machine readable digital components, 2) defined spatial and semantic modules with element metadata, 3) specification of element versions with detailed documentation, and 4) defined element relations and metadata (Fig. 1d-e). We elaborate on these requirements below.

First, *machine-readable digital atlas components* imply that all files and metadata are available in open and non-proprietary file formats suitable for direct processing by a machine.

The files and metadata for all the atlas versions shown in Figure 2 are available online, either on public websites, domain repositories, or at the atlases' respective homepages. Table 1 shows brain atlas version metadata for the four brain atlas versions shown in Figure 2.

Second, *defined spatial and semantic modules* in an atlas mean that all elements are identifiable and accessible with clear metadata. This makes atlases easier for users to understand and easier to incorporate into tools and infrastructure. At a minimum, this can be clear naming of the essential files or documentation about the location of all necessary information (Table 1). For example, all the files needed for using the WHS rat brain atlas are available via a domain repository (Table 2).

Third, *clear versioning with granular documentation* that state all changes differentiating two version of an atlas are needed to adhere to open science and FAIR principles. Currently this is achieved through use of persistent identifiers for publications, International Standard Book Numbers (ISBN) for atlases published as books, and Digital Object Identifiers (DOI) or Research Resource Identifiers (RRID)⁵⁷ for digital atlases. In addition, atlas reference data are made available as associated files³⁸, as downloadable internet resources^{11,16,17,37}, or by providing selected methodological descriptions in publications^{14,16}. Some atlases also provide documentation as a list, or as text describing new features or a high-level inventory of changes. Ideally, clear versioning of an atlas should enable novice users to identify the differences between two versions (Table 2).

Fourth, the *explicit relations between atlas elements*, such as parcellation criteria and coordinate system definitions, provide an empirical foundation for translating information across the elements. This allows users to connect data to different atlas elements (semantic or spatial), and automated search or comparison of data using terms and coordinates. Traditionally, such methodological information is presented in publications^{14,16}, but can also be available as white papers via a webpage^{53,58,59} or as single or distributed data publications⁵⁵ (Table 2).

Brain atlases that fulfill these four requirements are thus expected to be sufficiently well defined to be incorporated into research infrastructures and enable automated transfer of information across atlases and between data registered to other FAIR atlases.

Discussion

We have identified spatial and semantic elements of brain atlases, defined their relations, and created an Atlas Ontology Model (AtOM), specifying human and machine-readable metadata. Even though the AtOM elements are readily recognized in different atlases, they are often named according to traditions or common practice. For example, the reference data and the coordinate system are often considered as one entity, and referred to as the common coordinate space, reference template, reference space, brain model or atlas^{7,40}. The term atlas is invariably used to address reference data, an atlas version, any of a series of atlas versions or the annotation set. The annotation set, often in combination with the terminology, has also been called parcellations, segmentations or delineations^{16,17,37,43}.

Some of the AtOM elements have been suggested earlier⁷, as well as similar approaches to versioning and atlas organization¹⁶. However, AtOM is the first model for standardizing the common elements of any brain reference atlas, their definitions, and metadata, creating a standard to organize and share information about atlases or as a template to create an atlas.

When implemented, AtOM will facilitate precise and unique referencing of parts of an atlas, as well as the incorporation of atlases in digital tools or workflows. AtOM further provides a basis for specifying minimum requirements for brain atlases to comply with the FAIR principles. Below, we discuss how AtOM may contribute to increase interoperability among atlases, enable more standardized use of brain atlases in computational tools, and advance FAIR data sharing in neuroscience.

Interoperable atlases allow for exchange and translation of information across atlases, tools and data. Experimental data generated by different researchers typically relate to an atlas via spatial coordinates or anatomical terms, often defined by visual comparison of images or use of other observations such as measurements of functional properties. Researchers translate between the semantic and spatial location information using human readable metadata. At the same time, automated translation can be enabled via standardized, machine-readable files specifying properties and relations among atlas elements. The translation of information is dependent on interoperability across atlas elements, which can be specified at three levels: practical, technical, and scholarly.

At the *practical level*, translation of information across atlas elements is essential for interpretation and communication of anatomical locations, such as relating machine-readable coordinates to human-readable brain structure names. The relations specified between atlas

elements and the defining metadata allow comparisons of annotations and terminologies across atlases representing different species or strains, developmental stages, or disease states. By aligning reference data or coordinate systems of two different atlases, information can be directly compared or translated. However, reproducible use of atlas resources depends on unambiguous citation of atlas versions. When the atlas version reference is ambiguous, or if anatomical names are given without specification of the employed atlas version terminology, it is difficult to compare location between datasets⁹. Versioning, documentation, and clear references are therefore essential for atlases that change over time.

At a *technical level*, atlas information can be accessed using computational tools, requiring specification of essential parameters and versions, such as file formats and other technical metadata. Atlases that have closed proprietary file formats may technically be digital, but without being fully machine accessible and interoperable, they are difficult to utilize in analytic tools and infrastructures.

At a *scholarly level*, anatomical parcellation and terminology should be comparable across atlases. The lack of consensus about terminologies, parcellation schemata, and boundary criteria among neuroanatomists is a major challenge for the development, use, and comparison of brain atlases^{60–67}. Following different traditions, knowledge, and criteria, both domain experts and non-expert researchers may inevitably convey subjective and sometimes irreproducible information that is difficult to document. AtOM provides a foundation for organizing and communicating specific information about brain atlases in a standardized way that allows researchers to more precisely describe their interpretations, and thus contribute to increased reproducibility of results.

The value of interoperable atlases is substantial, allowing data integration, analysis and communication based on anatomical location. Brain atlases incorporated in various analytical tools open the possibility for efficient approaches to analyzing, sharing, and discovering data. For example, by analyzing images mapped to an atlas, the atlas information can be used to assign coordinates and terms to objects of interest^{8,68}. Data from different publications analyzed with the same atlas are comparable, and data registered to the spatial module (reference data and coordinate system) of an atlas may also be re-analyzed with new or alternative annotation sets. Perhaps more importantly, by specifying the AtOM elements as standardized machine readable files, it becomes possible to incorporate different atlases as exchangeable modules in analytic tools and infrastructure systems^{20–22,25,26}. Tools and systems using interoperable atlases can exploit the defined relations among the elements for automated operations, like data queries, calculations, or assignment of location identity to

experimental data that have been associated with an atlas by spatial registration or semantic identification.

AtOM has been implemented in SANDS (spatial anchoring of neuroscience data structures, https://github.com/HumanBrainProject/openMINDS_SANDS), an openMINDS metadata model extension. The openMINDS metadata framework (<https://github.com/HumanBrainProject/openMINDS>, <https://wiki.ebrains.eu/bin/view/Collabs/openminds/>) is adopted by the EBRAINS infrastructure to describe neuroscience research products, such as data, models and software, as well as the EBRAINS atlas resources. The multilevel human brain atlas (<https://ebrains.eu/service/human-brain-atlas/>), an atlas framework that spans across multiple spatial scales and modalities hosted on the EBRAINS infrastructure, exemplifies how several reference data, coordinate systems, and annotation set, developed over time, can be seamlessly incorporated and presented to users through a single viewer tool. A growing repertoire of tools, services and workflows within and outside of the EBRAINS infrastructure rely on formal descriptions for automated incorporation of research products, including brain atlases and common coordinate spaces. AtOM provides a framework for keeping track of the complex relations among these resources and research products.

In conclusion, the primary value of AtOM is that it establishes a standardized framework for developers and researchers using brain atlases to create, use, and refer to specific atlas elements and versions. Atlas developers can use the model to create clearly citable and interoperable atlases. For developers incorporating atlases in tools, AtOM defines atlas elements as modules that can be seamlessly exchanged to accommodate atlases for other species or developmental stages, or to switch between versions, coordinate systems, or terminologies. By standardizing the communication and use of fundamental reference resources, we are convinced that AtOM will accelerate efficient analysis, sharing and reuse of neuroscience data.

Methods

Ontologies are used in information sciences to specify formal representations that define the naming, properties, and relations among data and other elements that constitute a given subject or concept⁶⁹. By specifying the relations and hierarchies of objects and processes in an ontology model, it becomes possible to create systematic and coherent links among data files, metadata, and process descriptions of relevance for a complex system. Most importantly, they enable automated retrieval of information in using computational tools⁷⁰.

The first draft of AtOM (at the time called `parcellation.ttl`) was developed by eliciting requirements and use cases from the Blue Brain Project (<https://github.com/SciCrunch/NIF-Ontology/issues/49>). In order to ingest atlas terminologies into the NIF standard ontology a python module (https://github.com/tgbugs/pyontutils/tree/master/nifstd/nifstd_tools/parcellation) was written to convert from a variety of formats into OWL. An initial version of the core ontology and 24 atlas terminologies were created. These ontologies were loaded into SciGraph (<https://github.com/SciGraph/SciGraph>) and queries (<https://github.com/SciCrunch/sparc-curation/blob/67b534a939e2a271050c6edad97c707d8ec075d3/resources/scigraph/cypher-resources.yaml#L51-L267>) were then written against the original data model using the Cypher query language in order to find atlases, terminologies, and individual terms for specific atlases, species, and developmental stages. These queries have been used in production systems for over 4 years. During this time additional atlases were ingested using the python module (now totaling 40) and an initial draft of the conceptual model for AtOM was developed (<https://github.com/SciCrunch/NIF-Ontology/blob/master/docs/brain-regions.org>). For a full record of the iterative development of the model to fully distinguish the major elements found in the current version (though not under their current names) see <https://github.com/SciCrunch/NIF-Ontology/issues/49>.

A second round of development involved further requirements collection in the context of atlas creation and the conceptual model was heavily revised, regularized, and extended in the context of the atlasing needs of the Human Brain Project (HBP) (<https://github.com/SciCrunch/NIF-Ontology/commits/64c32abed9963073fab90dd5901d806fd8503da2> commit history from work during the HBP meeting in Oslo in November 21-22 2019) and the Allen Institute for Brain Sciences (<https://github.com/SciCrunch/NIF-Ontology/commit/a40a8c786529f5b2e2a3a8007776d057c5830d2d>, other interactions

occurred, but do not have public records of their occurrence). Various iterations of the model were applied to a wide variety of atlases and atlas-like things, such as paper and digital atlases, ontologies, figures from publications, crudely drawn diagrams on table cloths, globes, geographic information systems, traditional cartographic maps, topological maps of the peripheral nervous system, and more. This was followed by collection of requirements and live ontology development carried out in the context of the HBP, which included alignment with the schemas of the openMINDS SANDS metadata model for reporting spatial metadata (https://github.com/HumanBrainProject/openMINDS_SANDS). The resulting ontological model was applied to a number of existing atlases, specifically the WHS rat brain atlas^{14,36,37}, the AMBA CCF v3^{11,13}, and the human Julich-Brain atlas^{16,56}.

Data availability

NA

Code availability

NA

Acknowledgements

The present work builds on our earlier contributions to development of brain atlases, neuroinformatics and ontologies in neuroscience with contributions from many researchers. The inspiration for developing the Atlas Ontology Model came through fruitful and valuable discussions at the INCF Workshop on Digital Brain Atlasing in Warsaw, 2019. We particularly thank Michael Hawrylycz, Alexander Woodward, Rembrandt Bakker, Ingvald E. Bjerke, Martin Øvsthus, Ulrike Schlegel, Stefan Köhnen, Xiao Gui, and Camilla Blixhavn for valuable discussions during the different stages of developing the Atlas Ontology Model. This work was funded by the European Union's Horizon 2020 Framework Programme for Research and Innovation under the Specific Grant Agreement No. 785907 (Human Brain Project SGA2) and Specific Grant Agreement No. 945539 (Human Brain Project SGA3), The Research Council of Norway under Grant Agreement No. 269774 (INCF Norwegian Node, to JGB and TBL), and the Helmholtz Association's Initiative and Networking Fund through the

Helmholtz International BigBrain Analytics and Learning Laboratory (HIBALL) under the
Helmholtz International Lab grant agreement InterLabs-0015 (to TD).

Author contributions

HK contributed to conceiving the study, establishing and validating the model, writing the
paper, and creating figures. **THG** contributed to conceiving the study, establishing and
validating the model, creating and maintaining the ontology, writing the paper, and creating
figures. **LZ** contributed to establishing and validating the model, and writing the paper. **TD**
contributed to establishing and validating the model, and writing the paper. **JGB** contributed
to establishing and validating the model, and writing the paper. **MEM** contributed to
conceiving the study, establishing and validating the model, writing the paper, and
supervising the study. **TBL** contributed to conceiving the study, establishing and validating
the model, writing the paper, and supervising the study.

Competing interests

MM is the founder and has equity interest in SciCrunch Inc, a tech start up out of UCSD that
provides tools and services in support of reproducible science and Research Resource
Identifiers. JGB is a member of the Management Board of the EBRAINS AISBL, Brussels,
Belgium. The other authors declare that no competing interests or conflicts of interest exist
for any of the authors.

References

1. Bjaalie, J. Localization in the brain: new solutions emerging. *Nat. Rev. Neurosci.* **3**,
322–325 (2002).
2. Sunkin, S. & Hohmann, J. Insights from spatially mapped gene expression in the
mouse brain. *Hum. Mol. Genet.* **16**, R209–R219 (2007).
3. Nowinski, W. Evolution of Human Brain Atlases in Terms of Content, Applications,
Functionality, and Availability. *Neuroinformatics* **19**, 1–22 (2021).
4. Osumi-Sutherland, D. *et al.* Cell type ontologies of the Human Cell Atlas. *Nat. Cell*

- Biol.* **23**, 1129–1135 (2021).
5. Tyson, A. & Margrie, T. Mesoscale microscopy and image analysis tools for understanding the brain. *Prog. Biophys. Mol. Biol.* **168**, 81–93 (2022).
6. Newmaster, K., Kronman, F., Wu, Y. & Kim, Y. Seeing the Forest and Its Trees Together: Implementing 3D Light Microscopy Pipelines for Cell Type Mapping in the Mouse Brain. *Front. Neuroanat.* **15**, 1–19 (2022).
7. Amunts, K. *et al.* Interoperable atlases of the human brain. *Neuroimage* **99**, 525–532 (2014).
8. Bjerke, I. *et al.* Data integration through brain atlasing: Human Brain Project tools and strategies. *Eur. Psychiatry* **50**, 70–76 (2018).
9. Bjerke, I. *et al.* Navigating the Murine Brain: Toward Best Practices for Determining and Documenting Neuroanatomical Locations in Experimental Studies. *Front. Neuroanat.* **12**, 1–15 (2018).
10. Feo, R. & Giove, F. Towards an efficient segmentation of small rodents brain: A short critical review. *J. Neurosci. Methods* **323**, 82–89 (2019).
11. Wang, Q. *et al.* The Allen Mouse Brain Common Coordinate Framework: A 3D Reference Atlas. *Cell* **181**, 1–18 (2020).
12. Börner, K. *et al.* Anatomical structures, cell types and biomarkers of the Human Reference Atlas. *Nat. Cell Biol.* **23**, 1117–1128 (2021).
13. Oh, S. *et al.* A mesoscale connectome of the mouse brain. *Nature* **508**, 207–214 (2014).
14. Papp, E., Leergaard, T., Calabrese, E., Johnson, G. & Bjaalie, J. Waxholm Space atlas of the Sprague Dawley rat brain. *Neuroimage* **97**, 374–386 (2014).
15. Woodward, A. *et al.* The Brain/MINDS 3D digital marmoset brain atlas. *Sci. Data* **5**, 180009 (2018).
16. Amunts, K., Mohlberg, H., Bludau, S. & Zilles, K. Julich-Brain: A 3D probabilistic atlas of the human brain’s cytoarchitecture. *Science* **369**, 988–992 (2020).
17. Wagstyl, K. *et al.* BigBrain 3D atlas of cortical layers: Cortical and laminar thickness gradients diverge in sensory and motor cortices. *PLOS Biol.* **18**, e3000678 (2020).
18. Vandenbergh, M. *et al.* High-throughput 3D whole-brain quantitative histopathology in rodents. *Sci. Rep.* **6**, 20958 (2016).
19. Fürth, D. *et al.* An interactive framework for whole-brain maps at cellular resolution. *Nat. Neurosci.* **21**, 139–149 (2018).
20. Puchades, M., Csucs, G., Ledergerber, D., Leergaard, T. & Bjaalie, J. Spatial

- 445 registration of serial microscopic brain images to three-dimensional reference atlases
- 446 with the QuickNII tool. *PLoS One* **14**, e0216796 (2019).
- 447 21. Yates, S. *et al.* QUINT: Workflow for Quantification and Spatial Analysis of Features
- 448 in Histological Images From Rodent Brain. *Front. Neuroinform.* **13**, 1–14 (2019).
- 449 22. Groeneboom, N., Yates, S., Puchades, M. & Bjaalie, J. Nutil: A Pre- and Post-
- 450 processing Toolbox for Histological Rodent Brain Section Images. *Front.*
- 451 *Neuroinform.* **14**, 37 (2020).
- 452 23. Pallast, N., Wieters, F., Fink, G. & Aswendt, M. Atlas-based imaging data analysis
- 453 tool for quantitative mouse brain histology (AIDAhisto). *J. Neurosci. Methods* **326**,
- 454 108394 (2019).
- 455 24. Bjerke, I. *et al.* Densities and numbers of calbindin and parvalbumin positive neurons
- 456 across the rat and mouse brain. *iScience* **24**, 1–20 (2021).
- 457 25. Newmaster, K. *et al.* Quantitative cellular-resolution map of the oxytocin receptor in
- 458 postnatally developing mouse brains. *Nat. Commun.* **11**, 1–12 (2020).
- 459 26. Attili, S., Silva, M., Nguyen, T. & Ascoli, G. Cell numbers, distribution, shape, and
- 460 regional variation throughout the murine hippocampal formation from the adult brain
- 461 Allen Reference Atlas. *Brain Struct. Funct.* **224**, 2883–2897 (2019).
- 462 27. Wilkinson, M. *et al.* The FAIR Guiding Principles for scientific data management and
- 463 stewardship. *Sci. Data* **3**, 160018 (2016).
- 464 28. Amunts, K. & Zilles, K. Architectonic Mapping of the Human Brain beyond
- 465 Brodmann. *Neuron* **88**, 1086–1107 (2015).
- 466 29. Papp, E., Leergaard, T., Calabrese, E., Johnson, G. & Bjaalie, J. Addendum to
- 467 “Waxholm Space atlas of the Sprague Dawley rat brain” [NeuroImage 97 (2014) 374-
- 468 386]. *Neuroimage* **105**, 561–562 (2015).
- 469 30. Lein, E. *et al.* Genome-wide atlas of gene expression in the adult mouse brain. *Nature*
- 470 **445**, 168–176 (2007).
- 471 31. Amunts, K. *et al.* BigBrain: An Ultrahigh-Resolution 3D Human Brain Model. *Science*
- 472 **340**, 1472–1475 (2013).
- 473 32. Paxinos, G. & Watson, C. *The rat brain in stereotaxic coordinates*. (Academic Press,
- 474 1982).
- 475 33. Swanson, L. *Brain Maps: Structure of the rat brain*. (Elsevier, 1992).
- 476 34. Paxinos, G., Watson, C., Calabrese, E., Badea, A. & Johnson, G. *MRI/DTI Atlas of the*
- 477 *Rat Brain*. (Academic Press, 2015).
- 478 35. Swanson, L. Brain maps 4.0-Structure of the rat brain : An open access atlas with


- global nervous system nomenclature ontology and flatmaps. *J. Comp. Neurol.* **526**, 935–943 (2018).
36. Kjonigsen, L., Lillehaug, S., Bjaalie, J., Witter, M. & Leergaard, T. Waxholm Space atlas of the rat brain hippocampal region: Three-dimensional delineations based on magnetic resonance and diffusion tensor imaging. *Neuroimage* **108**, 441–449 (2015).
37. Osen, K., Imad, J., Wennberg, A., Papp, E. & Leergaard, T. Waxholm Space atlas of the rat brain auditory system: Three-dimensional delineations based on structural and diffusion tensor magnetic resonance imaging. *Neuroimage* **199**, 38–56 (2019).
38. Paxinos, G. & Watson, C. *The Rat Brain in Stereotaxic Coordinates*. (Academic Press, 2018).
39. Fonov, V. *et al.* Unbiased average age-appropriate atlases for pediatric studies. *Neuroimage* **54**, 313–327 (2011).
40. Evans, A., Janke, A., Collins, D. & Baillet, S. Brain templates and atlases. *Neuroimage* **62**, 911–922 (2012).
41. Dale, A., Fischl, B. & Sereno, M. Cortical Surface-Based Analysis. *Neuroimage* **9**, 179–194 (1999).
42. Johnson, G. *et al.* Waxholm Space: An image-based reference for coordinating mouse brain research. *Neuroimage* **53**, 365–372 (2010).
43. Dadi, K. *et al.* Fine-grain atlases of functional modes for fMRI analysis. *Neuroimage* **221**, 117126 (2020).
44. López-López, N. *et al.* From Coarse to Fine-Grained Parcellation of the Cortical Surface Using a Fiber-Bundle Atlas. *Front. Neuroinform.* **14**, 1–22 (2020).
45. Fan, L. *et al.* The Human Brainnetome Atlas: A New Brain Atlas Based on Connectional Architecture. *Cereb. Cortex* **26**, 3508–3526 (2016).
46. Valverde, F. *Golgi atlas of the postnatal mouse brain*. (Springer, 1998).
47. Altman, J. & Bayer, S. *Atlas of prenatal rat brain development*. (CRC Press, 1995).
48. Glasser, M. *et al.* A multi-modal parcellation of human cerebral cortex. *Nature* **536**, 171–178 (2016).
49. Boccara, C. *et al.* A three-plane architectonic atlas of the rat hippocampal region. *Hippocampus* **00**, 1–20 (2015).
50. Olsen, G. & Witter, M. Posterior parietal cortex of the rat: Architectural delineation and thalamic differentiation. *J. Comp. Neurol.* **524**, 3774–3809 (2016).
51. Allen Institute for Brain Science. Technical white paper: Allen mouse common coordinate framework. <http://help.brain-map.org/display/mousebrain/Documentation>

- (2015).
52. Allen Institute for Brain Science. Technical white paper: Allen mouse common coordinate framework. (2016).
53. Allen Institute for Brain Science. Technical white paper: Allen mouse common coordinate framework and reference atlas. <http://help.brain-map.org/display/mouseconnectivity/Documentation> (2017).
54. Amunts, K. *et al.* *Julich-Brain Atlas - whole-brain collections of cytoarchitectonic probabilistic maps (v2.9)*. EBRAINS <https://doi.org/10.25493/46HK-XMM> (2021).
55. Amunts, K. *et al.* *Whole-brain parcellation of the Julich-Brain Cytoarchitectonic Atlas (v2.9)*. EBRAINS <https://doi.org/10.25493/VSMK-H94> (2021).
56. Mangin, J., Rivière, D. & Amunts, K. *Surface projections of Julich-Brain cytoarchitectonic maps (v2.9)*. EBRAINS <https://doi.org/10.25493/NZGY-6AS> (2021).
57. Bandrowski, A. *et al.* The Resource Identification Initiative: a cultural shift in publishing. *Brain Behav.* **6**, e00417 (2016).
58. Allen Institute for Brain Science. Technical white paper: Allen reference atlas - version 2 (2011). <http://help.brain-map.org/display/mousebrain/Documentation> (2011).
59. Allen Institute for Brain Science. Technical white paper: Allen reference atlas - version 1 (2008). <http://help.brain-map.org/display/mousebrain/Documentation> (2008) doi:10.1354/vp.45-5-724-a.
60. Bota, M. & Swanson, L. 1st INCF Workshop on Neuroanatomical Nomenclature and Taxonomy. *Nat. Preced.* 12–17 (2008) doi:10.1038/npre.2008.1780.1.
61. Hawrylycz, M. *et al.* The INCF Digital Atlasing Program: Report on Digital Atlasing Standards in the Rodent Brain. *Nat. Preced.* (2009) doi:10.1038/npre.2009.4000.
62. Bohland, J., Bokil, H., Allen, C. & Mitra, P. The Brain Atlas Concordance Problem: Quantitative Comparison of Anatomical Parcellations. *PLoS One* **4**, e7200 (2009).
63. Azimi, N., Yadollahikhales, G., Argenti, J. & Cunningham, M. Discrepancies in stereotaxic coordinate publications and improving precision using an animal-specific atlas. *J. Neurosci. Methods* **284**, 15–20 (2017).
64. Khan, A., Perez, J., Wells, C. & Fuentes, O. Computer Vision Evidence Supporting Craniometric Alignment of Rat Brain Atlases to Streamline Expert-Guided, First-Order Migration of Hypothalamic Spatial Datasets Related to Behavioral Control. *Front. Syst. Neurosci.* **12**, 1–29 (2018).
65. Van De Werd, H. & Uylings, H. Comparison of (stereotactic) parcellations in mouse prefrontal cortex. *Brain Struct. Funct.* **219**, 433–459 (2014).

66. Laubach, M., Amarante, L., Swanson, K. & White, S. What, If Anything, Is Rodent Prefrontal Cortex? *eneuro* **5**, ENEURO.0315-18.2018 (2018).
67. Mai, J. & Majtanik, M. Toward a Common Terminology for the Thalamus. *Front. Neuroanat.* **12**, 1–23 (2019).
68. Bjerke, I., Yates, S., Puchades, M., Bjaalie, J. & Leergaard, T. *Brain-wide quantitative data on parvalbumin positive neurons in the rat*. EBRAINS <https://doi.org/10.25493/KR92-C33> (2020).
69. Guarino, N. Formal ontology, conceptual analysis and knowledge representation. *Int. J. Hum. Comput. Stud.* **43**, 625–640 (1995).
70. Chandrasekaran, B., Josephson, J. & Benjamins, V. What are ontologies, and why do we need them? *IEEE Intell. Syst.* **14**, 20–26 (1999).
71. Mikula, S., Trotts, I., Stone, J. & Jones, E. Internet-enabled high-resolution brain mapping and virtual microscopy. *Neuroimage* **35**, 9–15 (2007).
72. Amunts, K., Eickhoff, S., Caspers, S., Bludau, S. & Mohlberg, H. *Whole-brain parcellation of the Julich-Brain Cytoarchitectonic Atlas (v1.18)*. Human Brain Project Neuroinformatics Platform <https://doi.org/10.25493/8EGG-ZAR> (2019).


Figures

Figure 1. AtOM: Brain atlas elements, relations and metadata

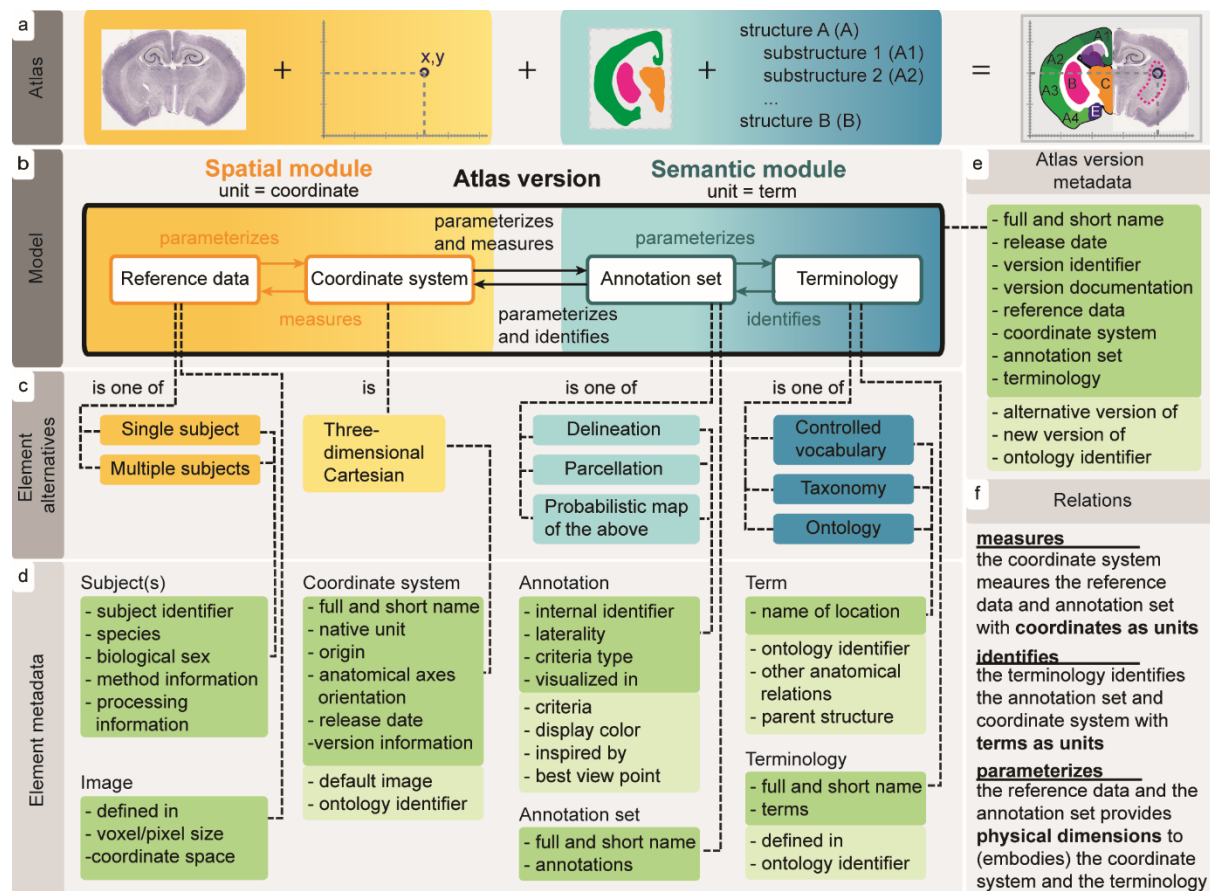

(a) A diagram showing a fictional atlas divided into parts. Nissl stained coronal Platypus (*ornithorhynchus anatinus*) brain section⁷¹. (b) The Atlas Ontology Model (AtOM) showing the elements: *reference data*, *coordinate system*, *annotation set*, and *terminology*, and their relations (as seen in (f)). The model consists of two reference modules: *spatial* (containing the coordinate system and reference data, yellow) and *semantic* (containing annotations and terminology, blue). (c) Each element can be one of a set of alternatives, (d) which have a set of minimum (dark green) and additional metadata (bright green). (e) The aggregated atlas version metadata, and (f) specification of model relations; *measures* (to provide a metric to), *identifies* (to recognize, establish or verify the identity of something) and *parameterizes* (to set the conditions of its operation).

Figure 2. AtOM representation of the most recent EBRAINS supported mouse, rat, and human brain atlas versions

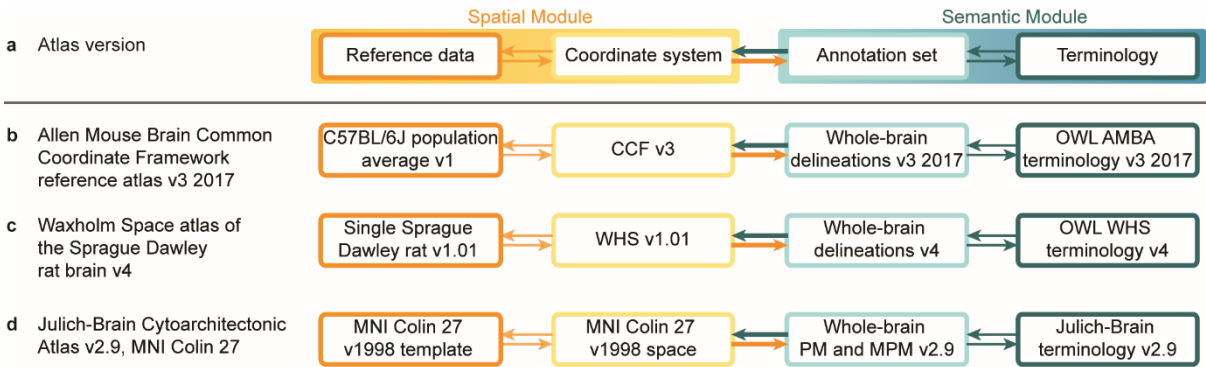

(a) Diagram showing AtOM. **(b-d)** Tabular view of the most recent versions of **(b)** the Allen Mouse Brain Atlas Common Coordinate Framework¹¹, **(c)** the Waxholm Space atlas of the Sprague Dawley rat brain¹⁴ and, **(d)** one alternative representation of the Julich-Brain cytoarchitectonic atlas¹⁶, which are all accessible in the EBRAINS infrastructure (<https://ebrains.hbp.eu/services/atlas>). A more detailed representation of these atlas versions can be found in Table 1. Table 2 show all version of the mouse and rat atlases, as well as all the alternative representation of the human brain atlas v1.18 and v2.9. CCF, Common Coordinate Framework; OWL, Web Ontology Language; AMBA, Allen Mouse Brain Atlas; WHS, Waxholm Space; MNI, Montreal Neurological Institute; PM, probabilistic maps; MPM, maximum probability maps.

Tables

Table 1. Mouse, rat and human brain atlas version metadata

Full name	Allen Mouse Brain Atlas Common Coordinate Framework v3 2017	Waxholm Space atlas of the Sprague Dawley rat brain v4	Julich-Brain Cytoarchitectonic Atlas v2.9, MNI Colin 27
Short name	AMBA CCF v3 2017	WHS rat brain atlas v4; WHSSDv4	Julich-Brain v2.9, Colin 27
Version identifier	3, 2017	4	2.9, Colin 27
Version innovation	Publication ¹¹ ; White paper AMBA CCF v3 2017 (http://help.brain-map.org/display/mouseconnectivity/Documentation)	Publication ¹⁴ ; Webpage (https://www.nitrc.org/projects/whs-sd-atlas)	Publication ¹⁶ ; EBRAINS datasets ^{54,55}
Alternative version of	NA	NA	Julich-Brain v2.9, MNI 152; Julich-Brain v2.9, BigBrain; Julich-Brain v2.9, fsaverage
New version of	AMBA CCF v3 2016	WHS rat brain atlas v3.01	Julich-Brain v2.5, Colin 27
Release date	NA	01.10.2021	31.07.2021
Reference data	C57BL/6J population average v1	Sprague Dawley rat v1.01	MNI Colin27 v1998 template
Coordinate system	CCF v3	WHS v1.01	MNI Colin27 v1998 space
Annotation set	Whole-brain parcellation, v3 2017	Whole-brain parcellation, v4	Whole-brain probabilistic maps and maximum probability maps
Terminology	OWL AMBA CCF terminology, v3 2017	OWL WHS SD terminology, v4	Julich-Brain terminology, v2.9
License	Not available, but see legal note (https://alleninstitute.org/legal/citation-policy/)	Creative Commons Attribution-ShareAlike (CC BY-SA) 4.0	Creative Commons Attribution-NonCommercial-ShareAlike (CC BY-NC-SA) 4.0

AMBA, Allen Mouse Brain Atlas; CCF, Common Coordinate Framework; MNI, Montreal Neurological Institute; OWL, Web Ontology Language; SD, Sprague Dawley; WHS, Waxholm Space.

603 **Table 2. EBRAINS supported mouse, rat and human brain atlas versions**

Species	Version number	Atlas version name (semantic ID)	Reference data	Coordinate system	Annotation set	Terminology	Reference(s)
Mouse	1	Allen Mouse Brain Common Coordinate Framework reference atlas v1	C57BL/6J population average v1	CCF v1	Whole-brain delineations v1	OWL AMBA terminology v1	http://help.brain-map.org/display/mousebrain/Documentation ; ³⁰
	2	Allen Mouse Brain Common Coordinate Framework reference atlas v2		CCF v2	Whole-brain delineations v2	OWL AMBA terminology v2	http://help.brain-map.org/display/mousebrain/Documentation ; ¹³
	3	Allen Mouse Brain Common Coordinate Framework reference atlas v3 2015		CCF v3	Whole-brain delineations v3 2015	OWL AMBA terminology v3 2015	http://help.brain-map.org/display/mousebrain/Documentation ; ¹¹
		Allen Mouse Brain Common Coordinate Framework reference atlas v3 2016			Whole-brain delineations v3 2016	OWL AMBA terminology v3 2016	¹¹
		Allen Mouse Brain Common Coordinate Framework reference atlas v3 2017			Whole-brain delineations v3 2017	OWL AMBA terminology v3 2017	http://help.brain-map.org/display/mouseconnectivity/Documentation ; ¹¹
Rat	1	Waxholm Space atlas of the Sprague Dawley rat brain v1	Single Sprague Dawley rat v1	WHS v1	Whole-brain delineations v1	OWL WHS terminology v1	RRID: SCR_017124; https://www.nitrc.org/projects/whs-sd-atlas ; ¹⁴
	1.01	Waxholm Space atlas of the Sprague Dawley rat brain v1.01	Single Sprague Dawley rat v1.01	WHS v1.01	Whole-brain delineations v1.01	OWL WHS terminology v1.01	RRID: SCR_017124; https://www.nitrc.org/projects/whs-sd-atlas ; ²⁹
	2	Waxholm Space atlas of the Sprague Dawley rat brain v2			Whole-brain delineations v2	OWL WHS terminology v2	RRID: SCR_017124; https://www.nitrc.org/projects/whs-sd-atlas ; ³⁶
	3	Waxholm Space atlas of the Sprague Dawley rat brain v3			Whole-brain delineations v3	OWL WHS terminology v3	RRID: SCR_017124; https://www.nitrc.org/projects/whs-sd-atlas ; ³⁷
	3.01	Waxholm Space atlas of the Sprague Dawley rat brain v3.01			Whole-brain delineations v3.01	OWL WHS terminology v3.01	NA
	4	Waxholm Space atlas of the Sprague Dawley rat brain v4			Whole-brain delineations v4	OWL WHS terminology v4	RRID: SCR_017124; https://www.nitrc.org/projects/whs-sd-atlas ; ¹⁴
Human*	1.18	Julich-Brain Cytoarchitectonic Atlas v1.18, MNI Colin 27	MNI Colin 27 v1998 template	MNI Colin 27 v1998 space	Whole-brain PM and MPM v1.18	Julich-Brain terminology v1.18	⁷²
		Julich-Brain Cytoarchitectonic Atlas v1.18, MNI 152	MNI ICBM 152 (2009c nonlin asym) template	MNI ICBM 152 (2009c nonlin asym) space			⁷²
		Julich-Brain Cytoarchitectonic Atlas v1.18, BigBrain	BigBrain (v2015) template	BigBrain (v2015) space			³¹
	2.9	Julich-Brain Cytoarchitectonic Atlas v2.9, MNI Colin 27	MNI Colin 27 v1998 template	MNI Colin 27 v1998 space	Whole-brain PM and MPM v2.9	Julich-Brain terminology v2.9	^{16,54,55}
		Julich-Brain Cytoarchitectonic Atlas v2.9, MNI 152	MNI ICBM 152 (2009c nonlin asym) template	MNI ICBM 152 (2009c nonlin asym) space			^{16,54,55}
		Julich-Brain Cytoarchitectonic Atlas v2.9, BigBrain	BigBrain (v2015) template	BigBrain (v2015) space	High-resolution maps v2.9		^{17,31}
		Julich-Brain Cytoarchitectonic Atlas v2.9, fsaverage	fsaverage surface v1	fsaverage space v1	Surface projections v2.9		^{16,56}

604 *Only two major releases, each with their alternative versions (representations of the
605 annotation set in different coordinate systems and respective reference data) of the human
606 brain atlas are shown here.