



Hyperparameter Optimisation

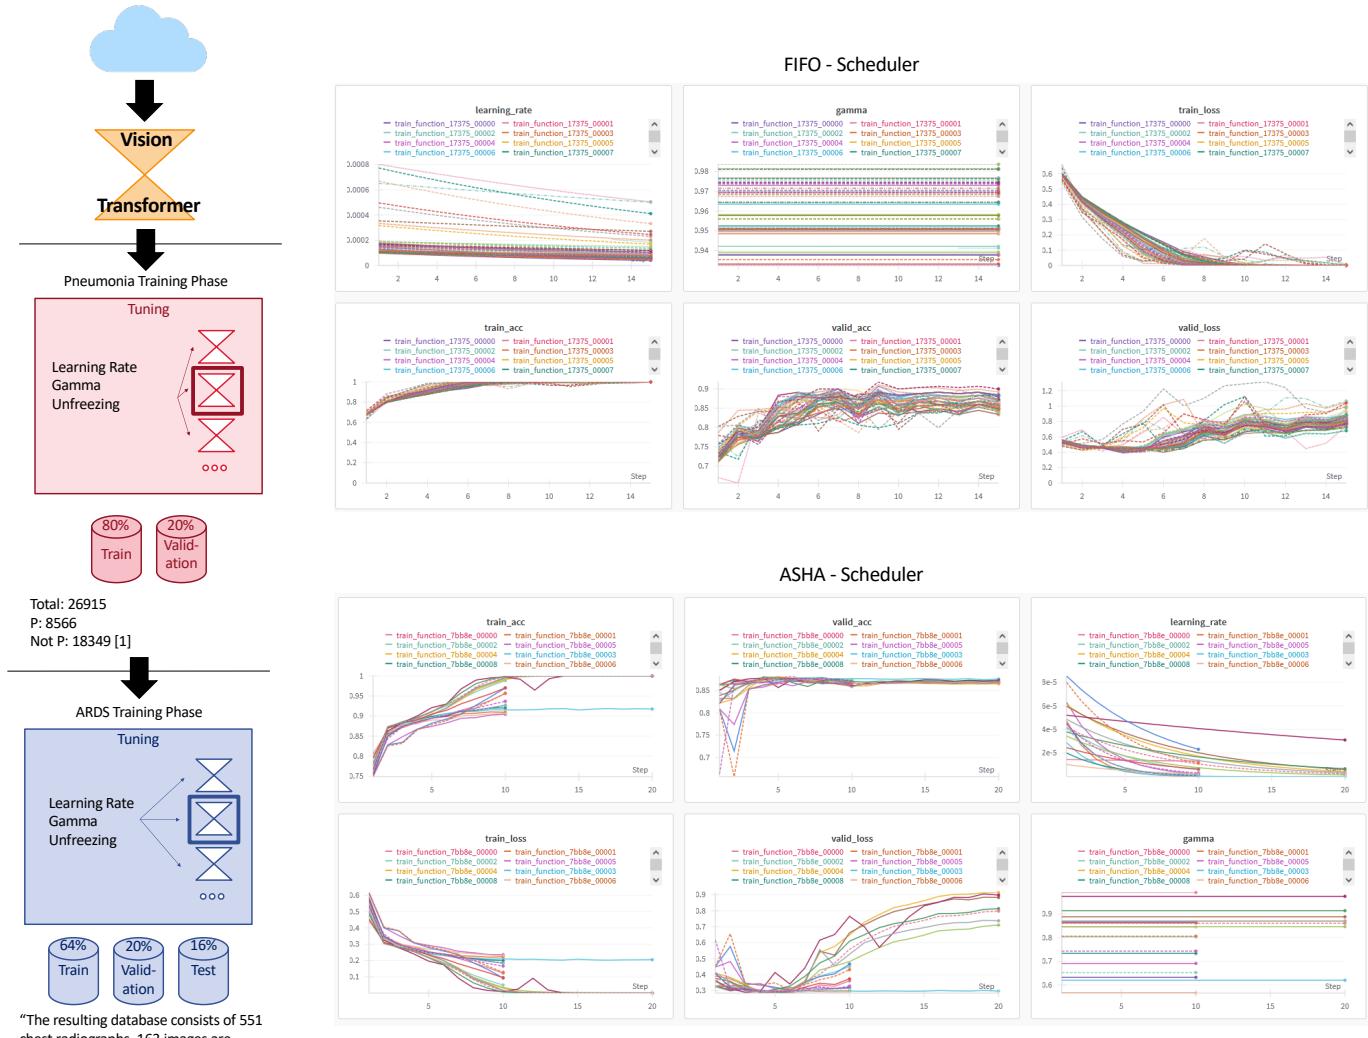

"The resulting database consists of 551 chest radiographs. 163 images are labeled for ARDS, 370 for no-ARDS and 18 are not assessable." [1]

[1] Paul, T., Stelter Krawiecki-Drago, Monic Riedel Advisors, D.-J., & Ponck, S. (2023). Automatic detection of bilateral infiltrates in X-ray images using Vision Transformer. Automatische Erkennung von bilaterale Infiltrate in Röntgenbildern mit Hilfe von Vision Transformer.

Few Shot Learning – Prototypical Networks

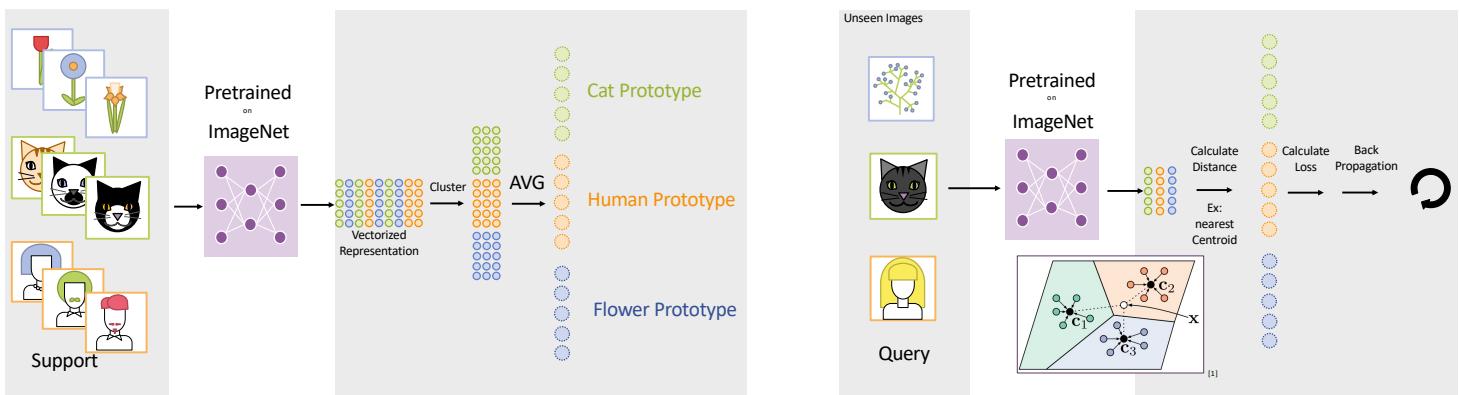

[1] Snell, J., Swersky, K., & Zemel, R. S. (2017). Prototypical Networks for Few-shot Learning. <https://arxiv.org/abs/1703.05175>

