

Introduction to ParaView

March 15, 2018 | Herwig Zilken

Outline

- Introduction
 - General Information
 - Basics of Visualization
- Getting Started
 - User Interface (Pipeline Browser, Properties and Information tab, ...)
 - Getting Data into ParaView
 - Controlling the Camera
 - Exercise I (Creating a Source)
 - Exercise II (Loading and viewing Data)
- Applying Filters
 - Common Filters
 - Exercise III (applying filters, creating visualization pipelines)
 - Exercise IV (Streamlines, Volume Rendering)
- Color Maps
- Multiple Views
 - Comparative View
 - 2D Plots
 - Exercise V (Plotting)
- Text Annotation
- Time in ParaView
 - Exercise VI + VII (Time Dependent Data)
- Animations
 - Exercise VIII
- Visualizing Large Models
 - ParaView on JURECA
- Python-Scripting
 - Exercise VII
- Plugins
- Documentation, Useful Links

This course is based on Kitware's Paraview Tutorial.


What is ParaView?

- Open-source data analysis and visualization application (two- and three-dimensional data sets)
- Built on top of VTK => provides a comprehensive suite of visualization algorithms
- Supports many different file formats for both loading and exporting data sets.
- Supported platforms: Linux, Windows, Mac
- Processing Modes:
 - Stand-alone mode
 - Client server configuration
 - Batch
- Locally installed at JSC:
 - Linux Workstation Group
 - JURECA

The History of ParaView

- **2000:** collaboration between Kitware Inc. and Los Alamos National Laboratory, funding provided by the US Department of Energy ASCI program
- **2002:** first release of ParaView
- **September 2005 - May 2007:** development of Paraview 3 by Kitware, Sandia National Lab. and other partners
 - ✓ user interface more user friendly
 - ✓ quantitative analysis framework
- **June 2013:** ParaView 4
 - ✓ more cohesive GUI controls
 - ✓ better multiblock interaction
 - ✓ In situ integration into simulation and other applications (Catalyst)
- **Recent Release:** (currently ParaView 5.4.1)
 - ✓ brand-new rendering backend with OpenGL 3.2 features (big change to the rendering infrastructure in ParaView's lifetime) since ParaView 5.0

ParaView's Architecture



pvpython

ParaView
Web

Catalyst

Custom App

UI (Qt Widgets, Python Wrappings)

ParaView Server

VTK

OpenGL

MPI

IceT

Etc.

ParaView's Architecture

- Concept of a visualization pipeline like VTK



- Modular architecture
 - ⇒ Separate processes possible for
 - Data processing
 - Rendering
 - User interface

Advantages using Paraview

- Modular architecture => Separate processes possible for Data processing, Rendering, User interface
- All modes look the same (Stand alone, Client/Server)
- Can handle large files
- Built on VTK, which has more functionality than other alternatives
- Free and actively supported by major DOE laboratories

Drawbacks


- Not 100% stable
- Internals are not well documented

Basics of Visualization


- Visualization: convert raw data into a form that is viewable and understandable to humans
- Data has well defined representation in 2D or 3D space
 - Data from simulation meshes and scanner data well suited
- Concept of a visualization pipeline (like VTK)
 - Three basic steps:
 - Read/generate data
 - Apply filters – generate new data from existing ones
 - Render data

Data Types: Structured Data


Uniform Rectilinear Grid (Image Data)
(vtkImageData)



Non-uniform Rectilinear Grid (Rectilinear Grid)
(vtkRectilinearData)



Structured (Curvilinear) Grid
(vtkStructuredData)




Data Types: Unstructured Data

Polygonal Mesh (Poly Data)
(vtkPolyData)




Unstructured Grid
(vtkUnstructuredGrid)



Multi-Block (several data sets grouped together)

Hierarchical Adaptive Mesh Refinement (AMR) →

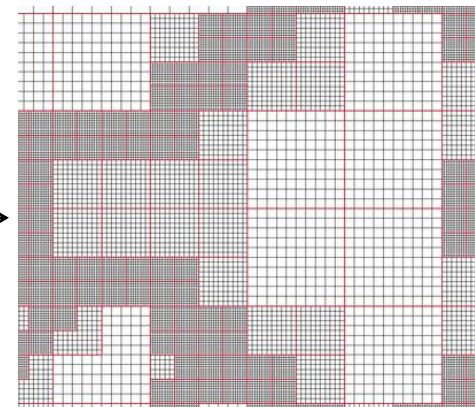

Data Attributes

- Data attributes at grid points (grid data, node data) or on cells (cell data, element data):
- General data attributes:
 - Scalar
 - Vector
 - Tensor ($n \times n$ matrix)
- Attributes with special meaning for the visualization process:
 - Normals (3D vector)
 - 2D or 3D texture coordinates
- Any number of variables can be defined at points and cells

Getting Started

- ParaView can be downloaded at www.paraview.org
 - Precompiled versions available for Mac OS, Windows and Linux
 - Sources for non-standard installations (e.g. using the mpi-version tailored to your system)
- ParaView client launches like most applications:
 - Windows: launcher located at the Start-Menu
 - Linux: execute paraview from a command prompt
 - Mac OS: open the application bundle that you installed

Supported Data File Formats

Some examples:

- ParaView files (.pvd)
- VTK xml based files
(.vtp, .vti, .vtr, .vts, .vtu)
- Parallel xml based VTK files
(.pvtp, .pvti, .pvtr, .pvts, .pvtu)
- VTK MultiBlock
(.vtm, .vtmb, .vtmg, .vthd, .vthb)
- Legacy VTK files
(.vtk for all types of data)
- Parallel legacy VTK files (.pvtk)
- EnSight files (.case)
- EnSight Master Server files (.sos)
- Exodus II files
(.g, .e, .ex2, .ex2v2, .exo, .gen, .exoll)
- BYU (.g)
- XDMF files (.xmf, .xdmf)
- PLOT3D files (.xyz, .q)
- SpyPlot CTH files (.spcth)
- DEM files (.dem)
- VRML files (.wrl)
- PLY Polygonal files (.ply)
- Protein Data Bank files (.pdb)
- Xmol Molecule files (.xyz)
- Stereo Lithography files (.stl)
- Gaussian Cube files (.cube)
- Raw (binary) files (.raw)
- AVS files (.inp)
- Meta Image files (.mhd, .mha)
- Facet files (.facet)
- PNG files (.png)
- LSDyna files (.d3plot, .k, .lsdyna)
- Phasta files (.pht)
- SESAME files (.sesame)
- Comma-separated values (CSV) files (.csv)

Full list at: https://www.paraview.org/Wiki/ParaView/Users_Guide/List_of_readers

Input File Formats – VTK as an Example

VTK Family

(<https://www.vtk.org/wp-content/uploads/2015/04/file-formats.pdf>)

- Legacy serial (.vtk)
 - polygonal, uniform, rectilinear, curvilinear, unstructured
- Legacy parallel
 - same as legacy serial, but data is partitioned into several files
- XML-based
 - uniform (images, .vti)
 - rectilinear (.vtr)
 - curvilinear (.vts)
 - polygonal (.vtp)
 - unstructured (.vtu)
- XML-based parallel
 - same as serial XML, but data is partitioned into several files

Converting Data to VTK Format

- Example on next slide: time dependent vector data on structured grid
- Converter to convert ascii data has to VTK XML was implemented
- VTK provides a number of source and writer classes to read and write popular data file formats
- In this example an XML file format of type **vtkStructuredGrid (. vts)** was chosen
- Result of converted data:
 - xml file including the name of the dataset for each timestep
 - n datasets files, each including data of each timestep

XML based StructuredGrid Fileformat: .vts

This is the description dataset, which lists the names of all existing time datasets in an XML-based format

```
<?xml version="1.0"?>
<VTKFile type="Collection" version="0.1" byte_order="LittleEndian">
<Collection>
<DataSet timestep="50"group="" part="0" file =
  "/private/sutmann/vts_Exercise_50.vts"/>
<DataSet timestep="100"group="" part="0" file =
  "/private/sutmann/vts_Exercise_100.vts"/>
<DataSet timestep="150"group="" part="0" file =
  "/private/sutmann/vts_Exercise_150.vts"/>

.....

</Collection>
</VTKFile>
```

XML Data (first timestep) : vts_Exercise_50.vts

```
<?xml version="1.0"?>
<VTKFile type="StructuredGrid" version="0.1" byte_order="LittleEndian">
  <StructuredGrid WholeExtent="0 47 0 47 0 151">
    <Piece Extent="0 47 0 47 0 151">
      <PointData>
        <DataArray type="Float32" Name="Velocity" NumberOfComponents="3" format="ascii">
          -0.21008299291 -0.051097899675 -0.04968290031 0.16106699407 -0.065898902714 0.010098299943
          0.10389400274 0.19959899783 -0.16598799825 0.15902400017 0.20383499563 -0.017544399947
          .....
        </DataArray>
      </PointData>
      <CellData>
      </CellData>
      <Points>
        <DataArray type="Float32" Name="Points" NumberOfComponents="3" format="ascii">
          -48.916801453 -49.018299103 -149.00500488 -46.871700287 -48.936100006 -149.16099548
          -44.773601532 -48.920101166 -149.07600403 -42.637401581 -48.958599091 -149.1734432
          . . .
        </DataArray>
      </Points>
    </Piece>
  </StructuredGrid>
</VTKFile>
```

HDF5

- Hierarchical data format: HDF5
- Efficient, portable IO library for storing scientific data
- High level of abstraction
- HDF5 is becoming a standard (even NetCDF is based on HDF5)
- HDF5 is a container for your specific data, not a standard data format

BUT: HDF5 files do not contain meta-information needed for visualization (semantics of datasets)

Solution: eXtensible Data Model and Format (XDMF)

XDMF

- Description of the meaning of HDF5 datasets, e.g. what data defines coordinates, what data defines attributes, ...
- Small XML files (light data) in addition to (large) data files (heavy data, typically HDF5)
- Light data: XML file containing XDFM language statements and references to datasets in heavy data
- Heavy data: HDF5 files (or binary)
- <http://www.xdmf.org>

XDMF

How to generate XDMF files

1. Write XDMF files by hand (its just a text file)
2. Add commands to write an additional XDMF file in your existing I/O procedures
3. Use XDMF API to write both light and heavy data

XDMF Elements

Important XDMF elements are:

- **Grid:** defines a single grid, an array or tree of grids, or a subset of another grid
- **Topology:** defines the topology of structured and unstructured grids
- **Geometry:** defines coordinates of node points
- **Attributes:** defines values associated with the grid, node and cell centered
- **Time:** defines time values for a set of grids
- **Dataltem:** the actual data, typically references to HDF5 or binary data sets, but may also be directly defined in the XDFM File. Also functions are possible in a Dataltem, e.g. to calculate the magnitude of a vector on the fly.

XDMF: Example for Structured Grid

```
<?xml version="1.0" ?>
<!DOCTYPE xdmf SYSTEM "Xdmf.dtd" []>
<Xdmf Version="2.0">
  <Domain>
    <Grid Name="sphere" GridType="Uniform">
      <Topology TopologyType="3DCoRectMesh" NumberOfElements="2048 2048 2048"/>
      <Geometry GeometryType="ORIGIN_DXDYZ">
        <DataItem Dimensions="3" NumberType="Float" Precision="4" Format="XML">
          -1024.000000 -1024.000000 -1024.000000
        </DataItem>
        <DataItem Dimensions="3" NumberType="Float" Precision="4" Format="XML">
          1.000000 1.000000 1.000000
        </DataItem>
      </Geometry>
      <Attribute Name="distance" AttributeType="Scalar" Center="Node">
        <DataItem Dimensions="2048 2048 2048" NumberType="Float" Precision="4"
          Format="HDF">
          /viswork/hdf5Test/test_32768.h5:/sphere
        </DataItem>
      </Attribute>
    </Grid>
  </Domain>
</Xdmf>
```

XDMF: Example for Unstructured Grid (1/2)

```
<?xml version="1.0" ?>
<!DOCTYPE xdmf SYSTEM "Xdmf.dtd" []>
<Xdmf Version="2.0">
  <Domain>
    <Grid Name="flow" GridType="Uniform">
      <Topology TopologyType="Tetrahedron" NumberOfElements="13340987">
        <DataItem Format="HDF" Dimensions="13340987 4">
          out.h5:/flow_Cells
        </DataItem>
      </Topology>
      <Geometry GeometryType="XYZ">
        <DataItem Format="HDF" NumberType="Float" Precision="8" Dimensions="2286605 3">
          out.h5:/flow_Points
        </DataItem>
      </Geometry>
    </Grid>
  </Domain>
</Xdmf>
```

XDMF: Example for Unstructured Grid (2/2)

```
<Attribute Name="u" AttributeType="Scalar" Center="Node" >
  <DataItem Format="HDF" NumberType="Float" Precision="8" Dimensions="2286605">
    out.h5:/u
  </DataItem>
</Attribute>
<Attribute Name="v" AttributeType="Scalar" Center="Node" >
  <DataItem Format="HDF" NumberType="Float" Precision="8" Dimensions="2286605">
    out.h5:/v
  </DataItem>
</Attribute>
<Attribute Name="w" AttributeType="Scalar" Center="Node" >
  <DataItem Format="HDF" NumberType="Float" Precision="8" Dimensions="2286605">
    out.h5:/w
  </DataItem>
</Attribute>
<Attribute Name="p" AttributeType="Scalar" Center="Node" >
  <DataItem Format="HDF" NumberType="Float" Precision="8" Dimensions="2286605">
    out.h5:/p
  </DataItem>
</Attribute>
</Grid>
</Domain>
</Xdmf>
```

Programmable Source

Read your data with a programmable source filter

See:

https://www.paraview.org/Wiki/Python_Programmable_Filter

Programmable filters are programmed in Python

Example later ...

Starting ParaView

Start VNC-Server on JurecaVis (JurecaVis01 or JurecaVis02)

1. Open a terminal and login to Jureca: „ssh jurecavis“ (passphrase is your password)
2. Create directory .vnc: „mkdir .vnc && chmod 700 .vnc“
3. Enter password for vnc: „vncpasswd“, type in the password you want
4. Start vnc-server: „vncserver -fg -geometry 1920x1080“
5. Look at the output and remember the **login-node** and the **display-number**, e.g.:
„jurecavis01.fz-juelich.de:4“
(Note: Display 4 corresponds to port $5900+4=5904$)

Establish SSH Tunnel and start VNC-Viewer

1. Open new terminal on your workstation (not on JURECA) and open tunnel to Jurecavis: „ssh -L 5904:localhost:5904 jurecavis01“
2. Open new terminal on your workstation and start vncviewer: „vncviewer localhost:4“

Copy Files and Start ParaView

1. Open terminal on JURECA and copy files “cp -r ~train132/paraview.”
2. Start ParaView: “cd paraview; source setup_paraview_5.4.1; vglrun paraview”
Close splash screen.

User Interface


Menu Bar

Toolbars

Pipeline Browser

Properties &
Information Panel

Toggle advanced
properties:
Shows/hides additional
control parameter

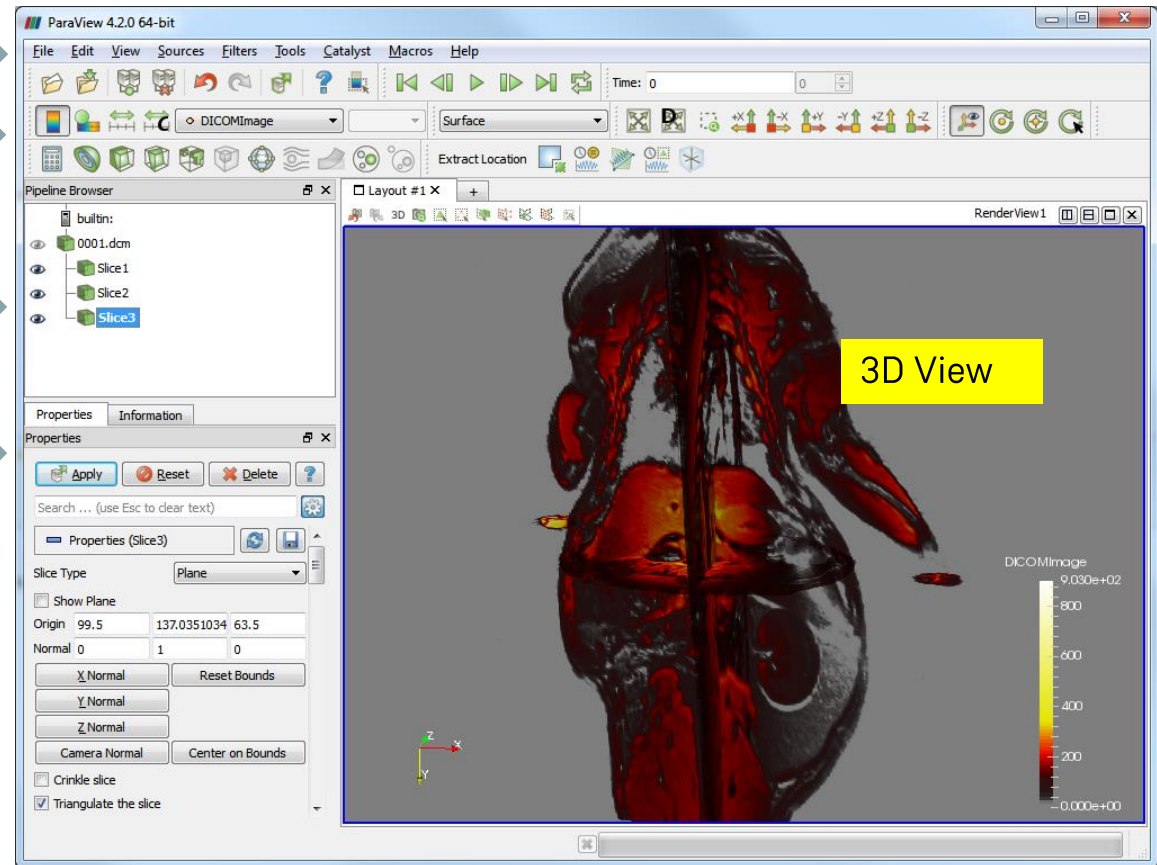


Menu Bar: access the majority of features

Toolbars: quick access to the most commonly used tools



The Pipeline Browser

- shows data readers and filters
- shows current visualization pipeline structure
- allows you to
 - select objects within the current visualization pipeline
 - edit pipeline objects via the Properties Panel
- concept of **active objects**:
 - The selected object in the pipeline browser is the **active object**
 - All changes within the GUI will refer on what is actually active
 - The **active object** is used as the default object to use for operations like adding a filter

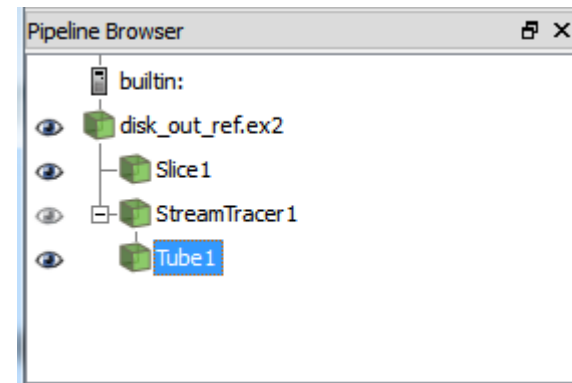


Properties Panel

- Depends on the active object in the pipeline
- Properties section: various parameters of the active object
- Display section: appearance of the active object (Representation, Color, Annotation, ...)
- View section: properties of the render view (Background, Orientation Axes, ...)

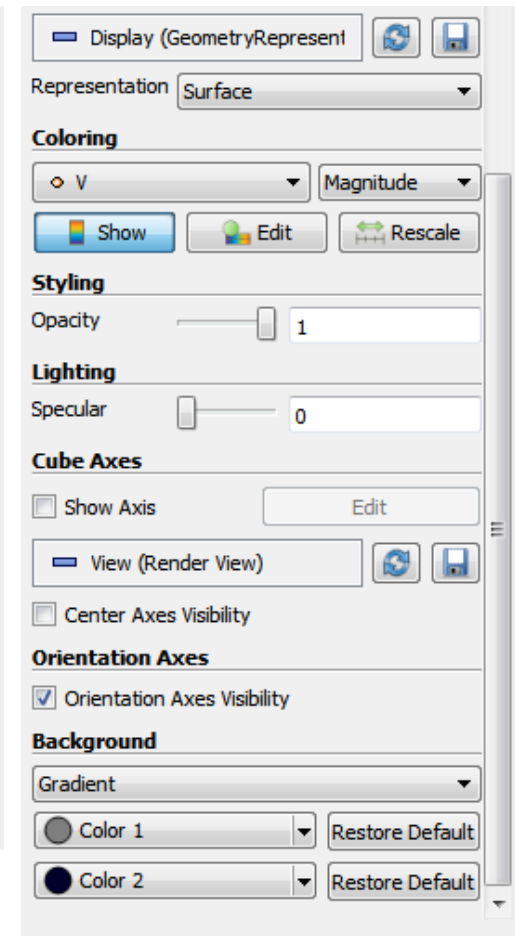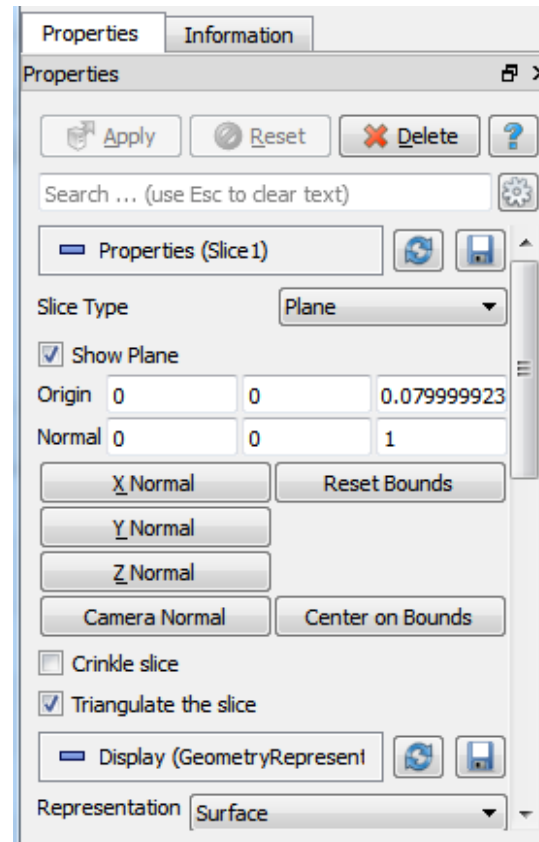


Apply/Reset

- changes to the object properties are not immediately enacted
 - press Apply button to synchronize your view with the parameters
- Same applies to opening a file:
 - File -> open just reads the header information of the file
 - Hit the Apply button to load the data
- Hitting the Reset button will restore the options back to the last time they were applied.

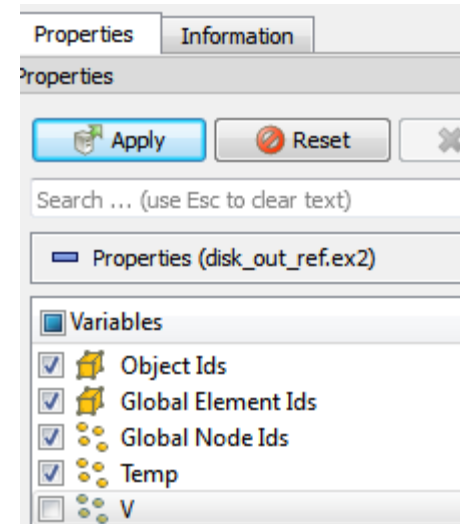

Information Tab:

- modal, shows characteristics of the active object
 - Dataset Type
 - Number of Cells, Points
 - Data Arrays
 - ...

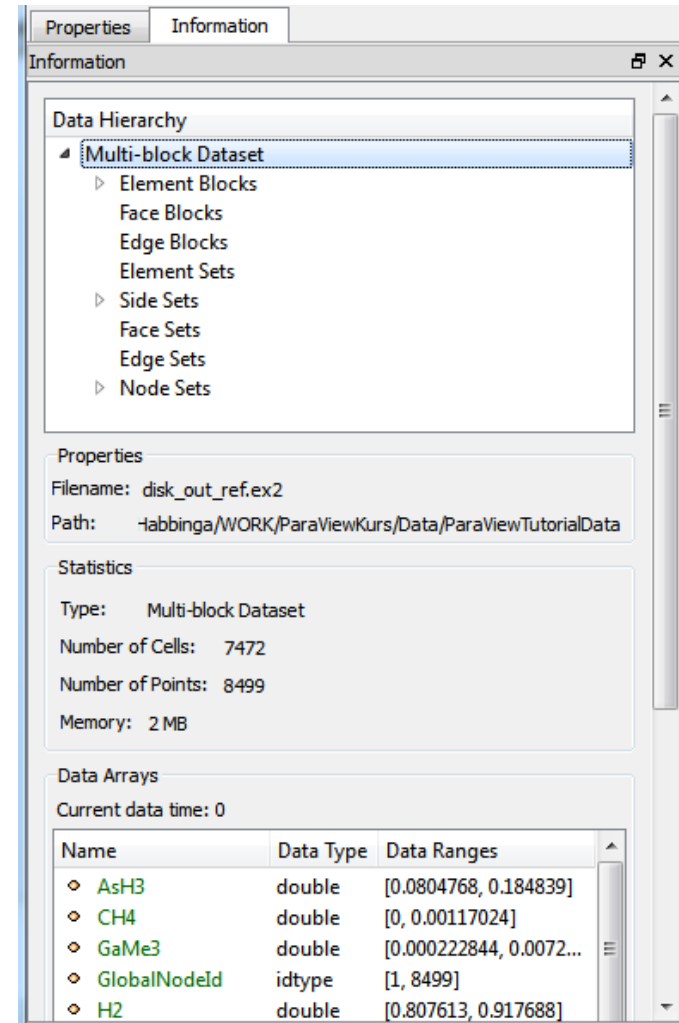

The screenshot shows the 'Information' tab in ParaView. The 'Data Hierarchy' pane on the left shows a 'Multi-block Dataset' expanded, listing 'Element Blocks', 'Face Blocks', 'Edge Blocks', 'Element Sets', 'Side Sets', 'Face Sets', 'Edge Sets', and 'Node Sets'. The main pane displays the following information:


Properties
 Filename: disk_out_ref.ex2
 Path: -labbinga/WORK/ParaViewKurs/Data/ParaViewTutorialData

Statistics
 Type: Multi-block Dataset
 Number of Cells: 7472
 Number of Points: 8499
 Memory: 2 MB

Data Arrays
 Current data time: 0

Name	Data Type	Data Ranges
AsH3	double	[0.0804768, 0.184839]
CH4	double	[0, 0.00117024]
GaMe3	double	[0.000222844, 0.0072...
GlobalNodeId	idtype	[1, 8499]
H2	double	[0.807613, 0.917688]


Active Variable Controls, Representation Toolbar

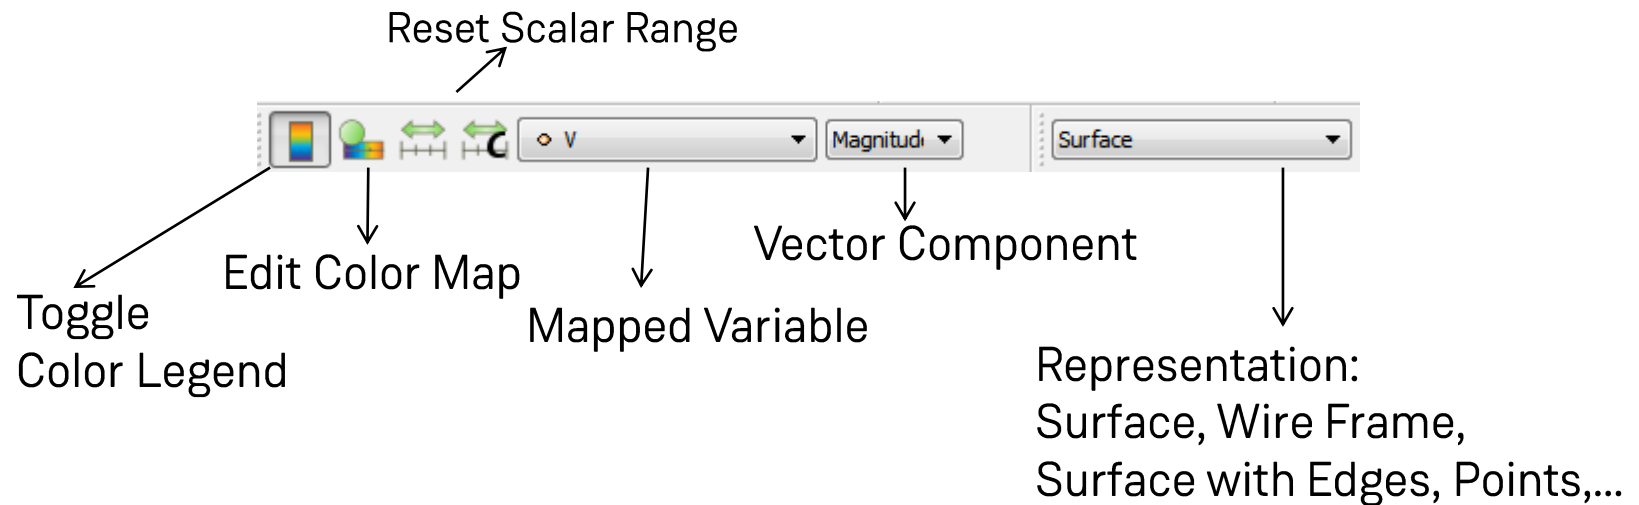

Can also be found in the display group of the properties panel!

Display Area

- probably most important part
- shows results of the current visualization pipeline
- various possible formats (2D and 3D views)
- Each display can be split vertically/horizontally

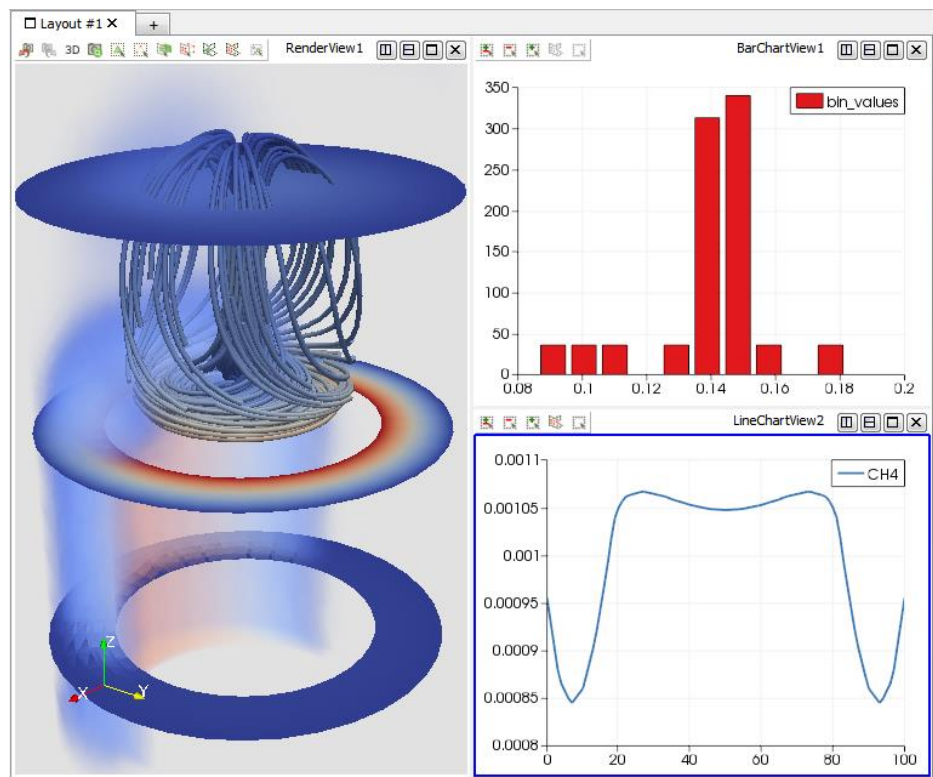

Getting Data into ParaView

There are several methods loading data in ParaView:

- Reading data
 - from a file (File – Open)
 - command line argument `--data=datafile`
- Generate data from SOURCES Menu
- load a previously saved state file (File menu, Load State)
 - this will return ParaView to its state at the time the file was saved (loading data, applying filters, setting preferences etc)
- If you want to start a fresh visualization:
 - reset ParaView with the disconnect button:
 - Edit -> Reset Session




Controlling the camera

- Mouse interaction is mapped to camera movements as follows:


	Left Button	Middle Button	Right Button
	Rotate	Pan	Zoom
Shift +	Roll	Rotate	Pan
Ctrl +	Zoom	Rotate	Zoom

- Can be customized in the Settings menu
- Camera Controls toolbar:

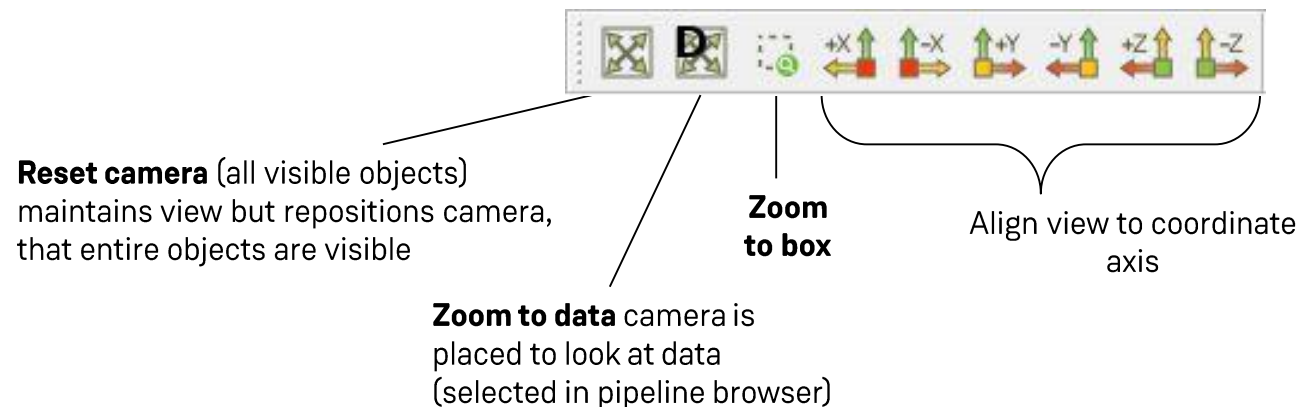


Controlling the camera (continued)

- Within the toolbar of each view:

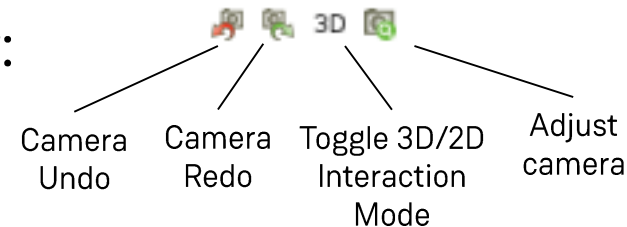

- Adjust camera:
 - 4 custom views can be stored
 - Camera parameters (position, view direction, view angle) can be set manually

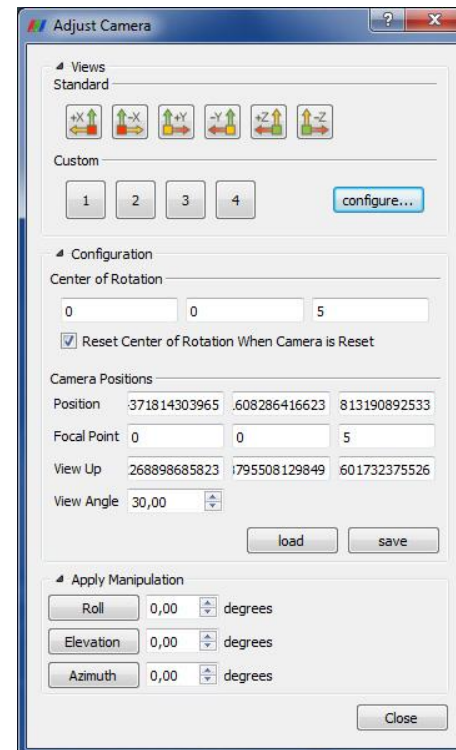

Controlling the camera (continued)



Show/hide orientation axes at bottom-left corner of the active view



Show/hide axis drawn at the center of rotation




Set center of rotation to the center of the object



Allows to pick the center of rotation


Memory Inspector

- Gives overview about the memory footprint
- In parallel mode, information about client and server is given

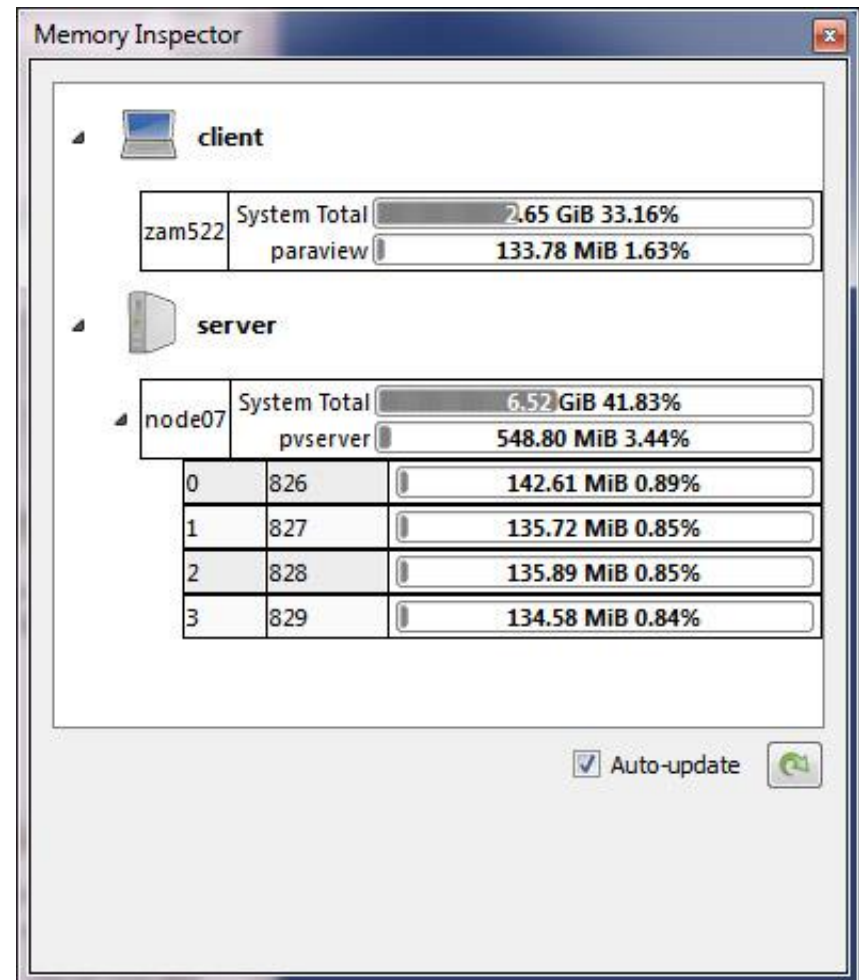

Statistics Inspector

- Shows statistical information about all loaded data and filters
 - Name
 - Data type
 - Number of cells and points
 - Memory consumption
 - Spatial and temporal bounds

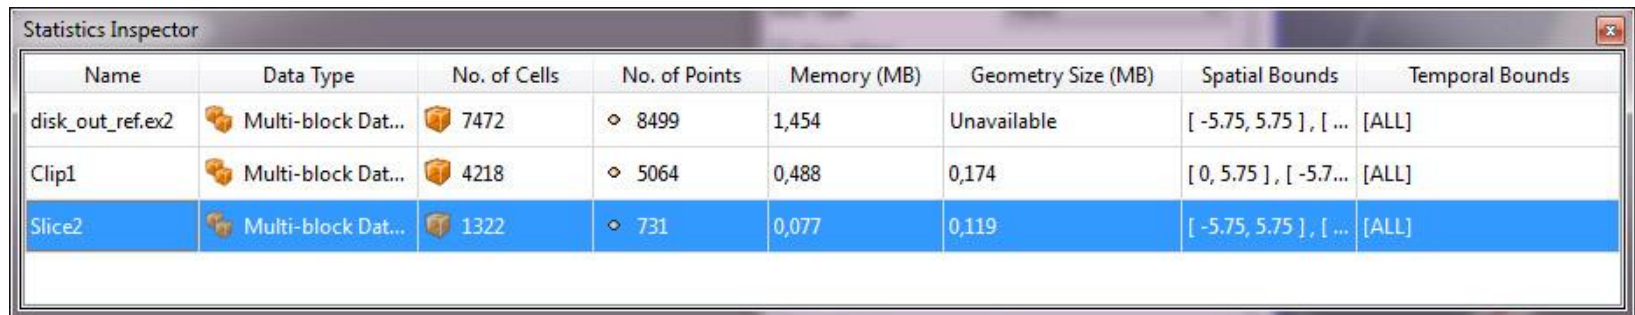

Name	Data Type	No. of Cells	No. of Points	Memory (MB)	Geometry Size (MB)	Spatial Bounds	Temporal Bounds
disk_out_ref.ex2	Multi-block Dat...	7472	8499	1,454	Unavailable	[-5.75, 5.75], [...	[ALL]
Clip1	Multi-block Dat...	4218	5064	0,488	0,174	[0, 5.75], [-5.7...	[ALL]
Slice2	Multi-block Dat...	1322	731	0,077	0,119	[-5.75, 5.75], [...	[ALL]

Exercise I: Creating a Source

1. Select a Sphere from the Source Menu
 - Show it in a 3D view and increase it's resolution
 - Experiment with dragging different mouse buttons within the view (+ shift, ctrl)

2. (Delete the pipeline) Select a text from the Source Menu
 - Additionally take a 3D text from the Source Menu

Exercise II: Loading and viewing Data

1. Open **disk_out_ref.ex2**
 - Select all variables, press “Apply”
 - Select variable V for the coloring
 - Try the different representation styles, finally choose surface with edges
 - Turn the opacity value to 0.25
 - Save the actual state in a ParaView state file.
2. Experiment with the Center of Rotation:
 - Show/Hide it
 - Pick another Center (try some camera movements)
 - Reset the Center Of Rotation

Applying Filters

Achievements so far:


- Read in the data, glean some information about it
- See the structure of the mesh, map some attribute data on its surface

But! Many interesting features cannot be determined by just looking at the original data

- Discover much more about the data applying filters!
 - Extract or generate new features from the data
 - filters are attached to readers, sources, or other filters to modify its data in some way.
- Most common filters are available in the filters toolbar:




Common Filters: Calculator

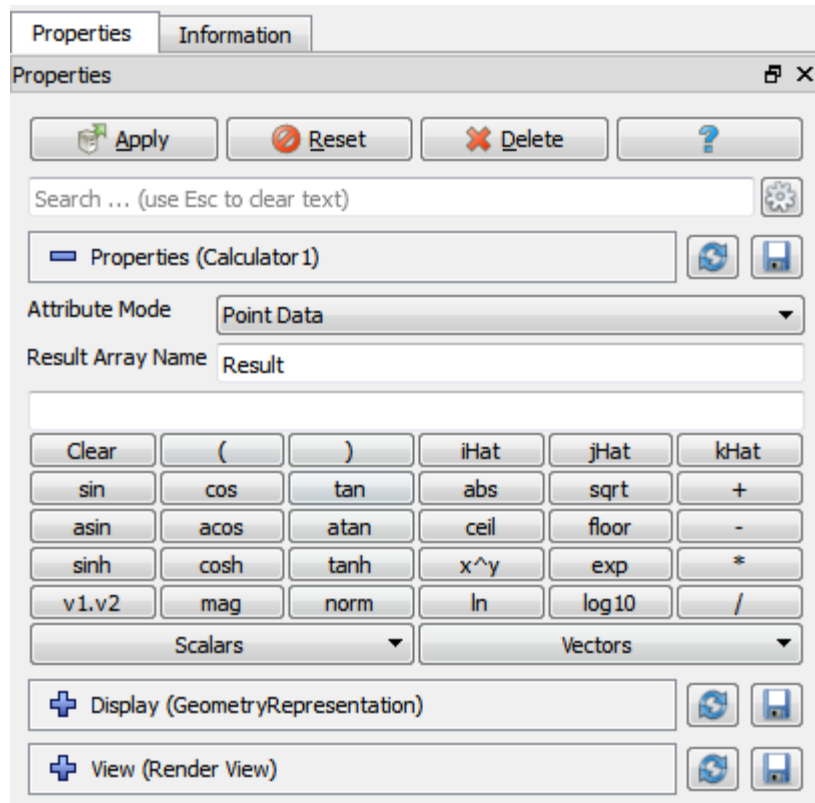


- Evaluates a user-defined expression on a per-point or per-cell basis
- generates a new data attribute as a function of given attributes
- Available attributes are listed in the “Scalars” and “Vectors” combo boxes
- Vector result can be generated by iHat, jHat and kHat, e.g.

$$\text{“coordsX*iHat+coordsY*jHat+coordsZ*kHat”}$$


Common Filters: Contour

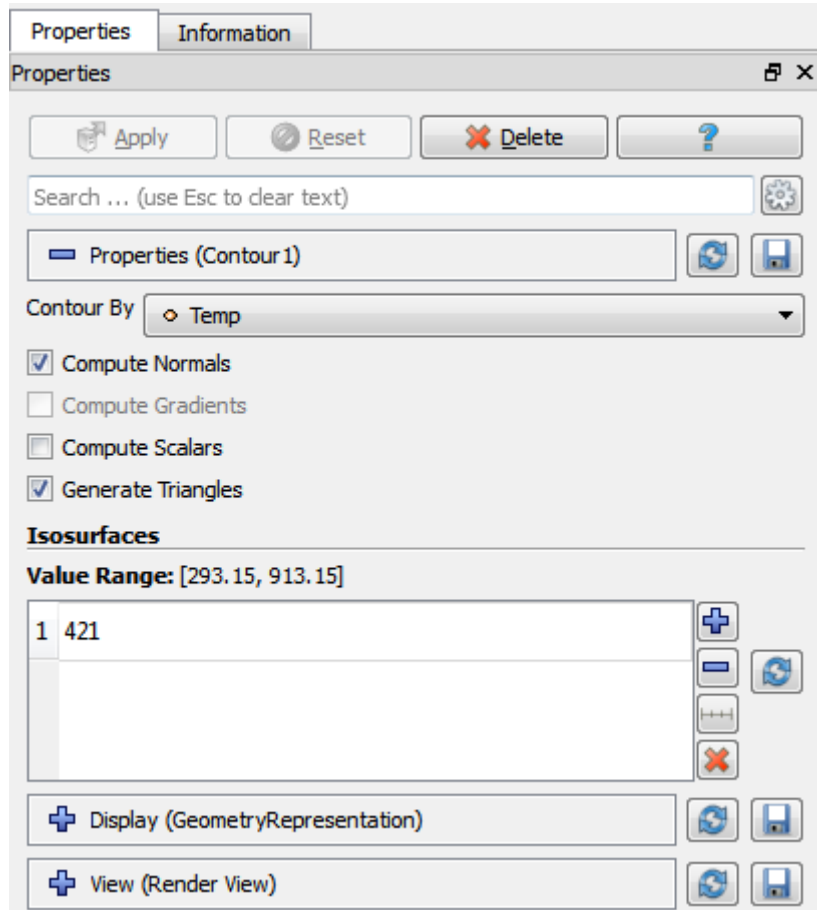


- Extracts the points, curves, or surfaces where a scalar field is equal to a user-defined value.
- This surface is often also called an isosurface

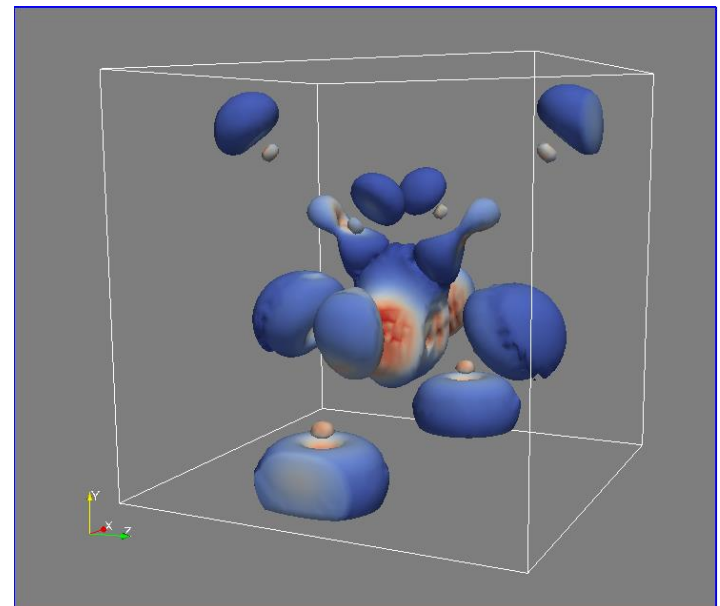


Common Filters: Clip

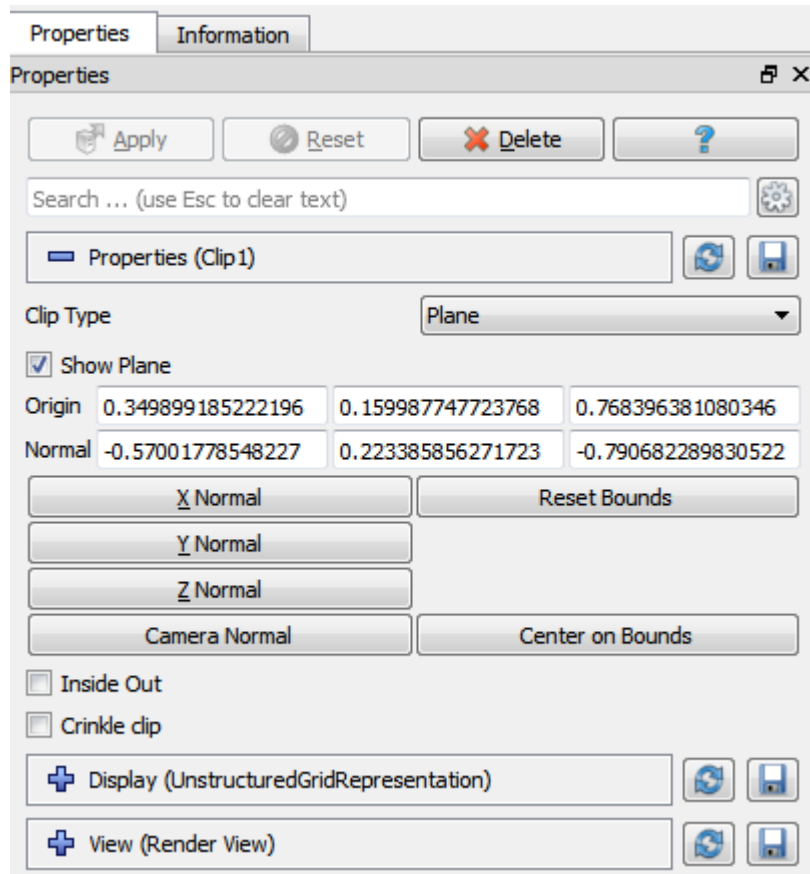


- Intersects the geometry with a user-defined plane, box or sphere
- Removes all the geometry on one side of this plane (box, sphere)

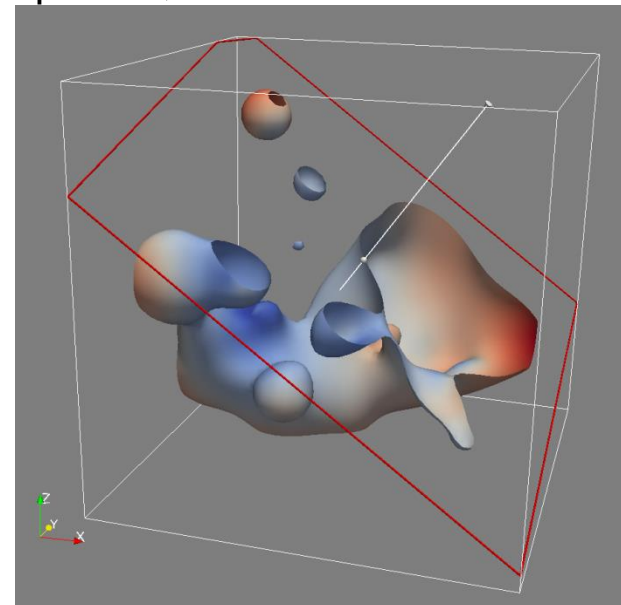

Common Filters: Slice

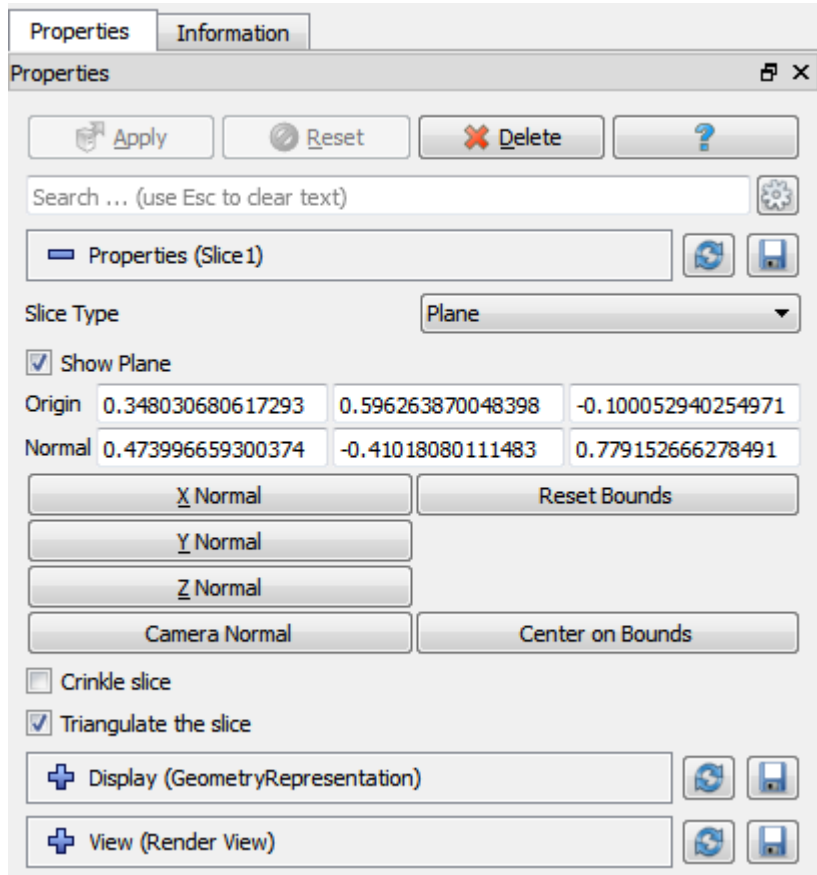



- Intersects the geometry with a plane, box, sphere or cylinder
- Similar to clipping, except that all that remains is the geometry where the plane is located.

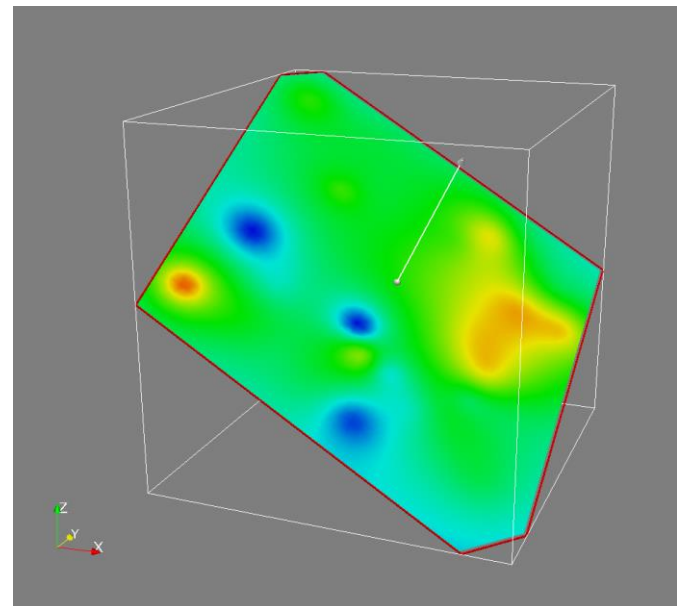


Common Filters: Threshold




- Extracts cells that lie within a specified range of a scalar field

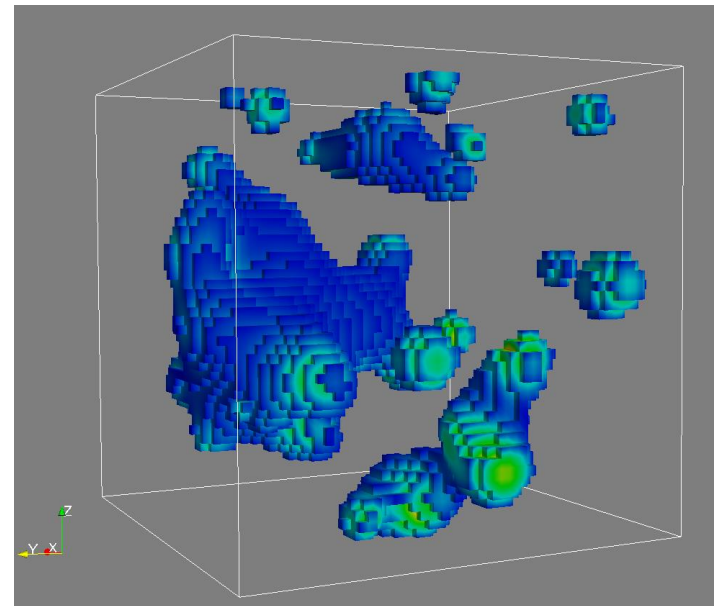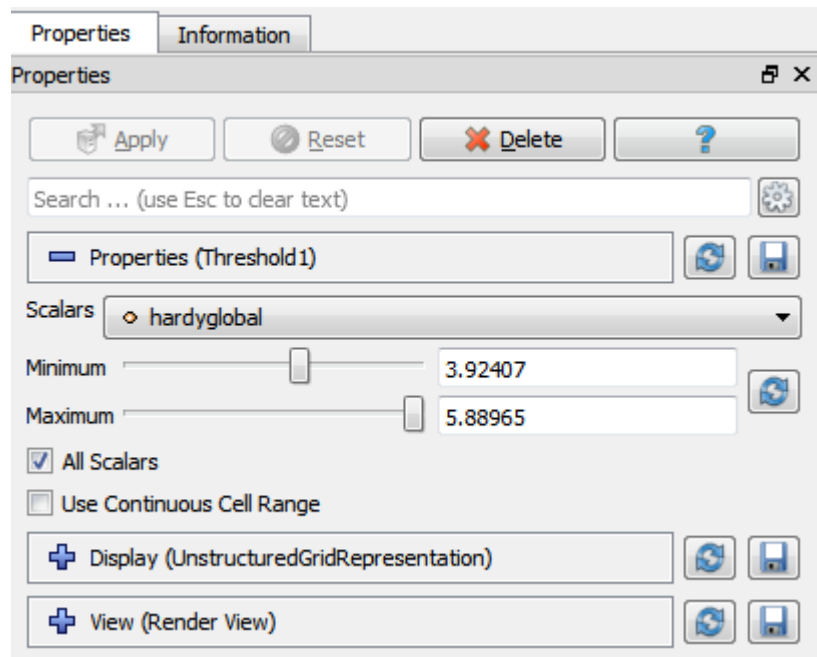



Common Filters: Extract Subset

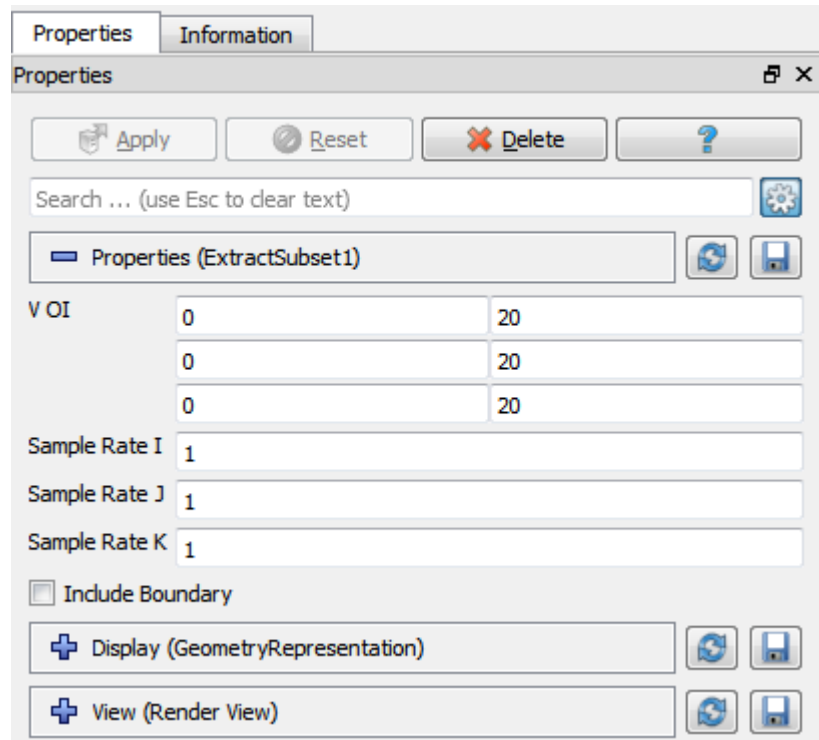


- Extracts a subset of a grid by defining a volume of interest and a sampling rate

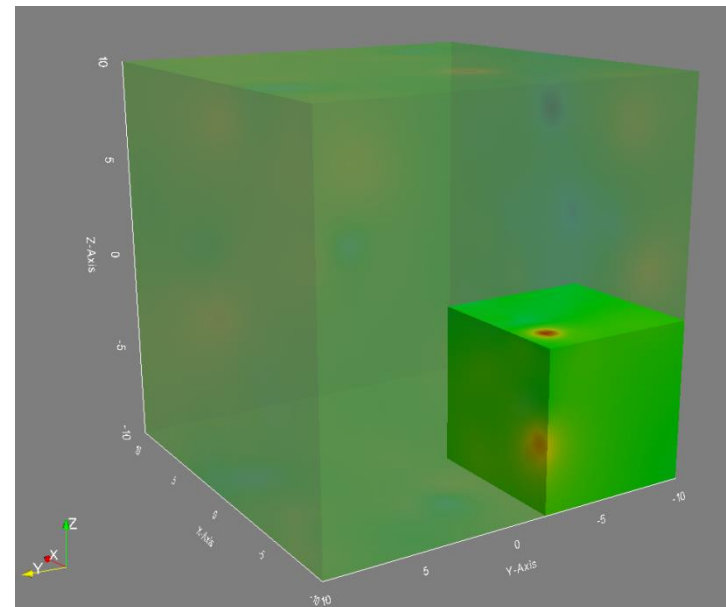


Common Filters: Glyph

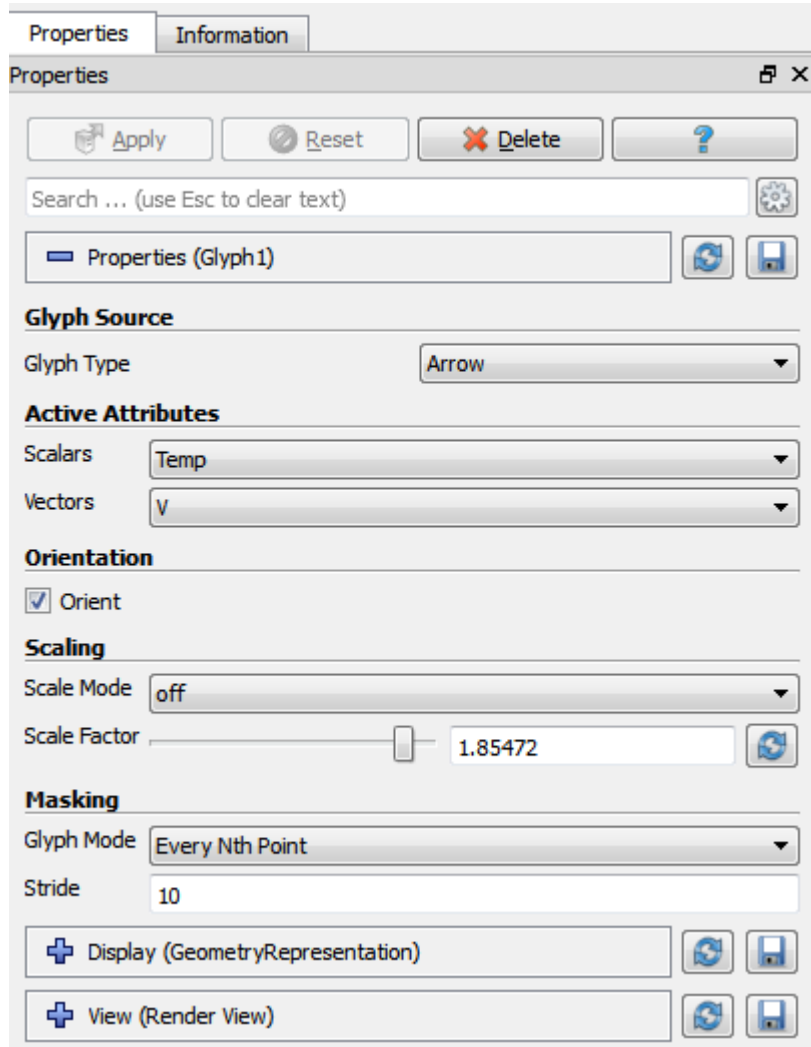


- Places a glyph, a simple shape, on each point in a mesh
- glyphs may be oriented by a vector and scaled by a vector or scalar.

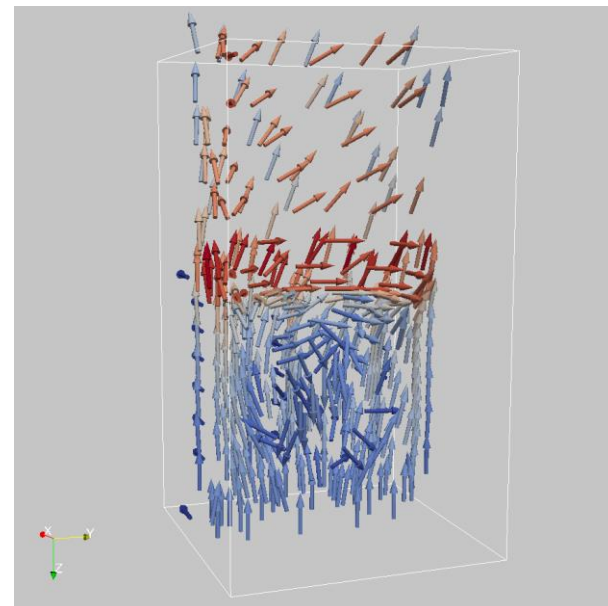


Common Filters: Stream Tracer

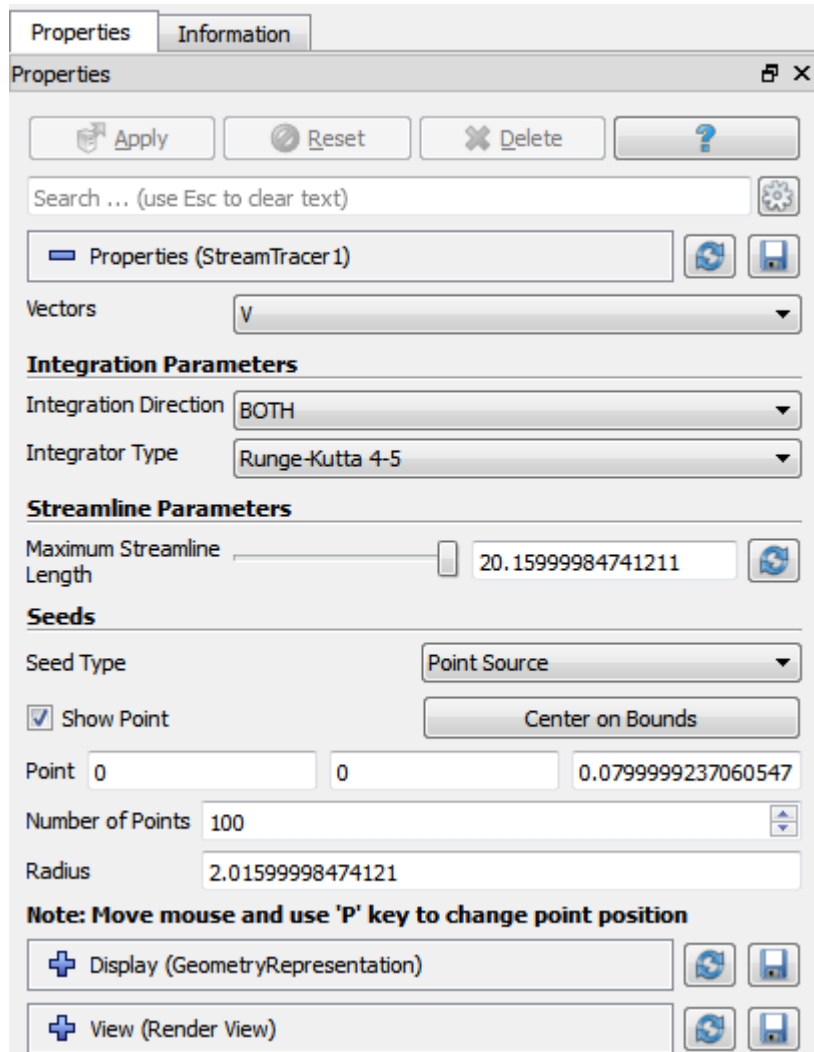


- Seeds a vector field with points and then traces those seed points through the (steady state) vector field.

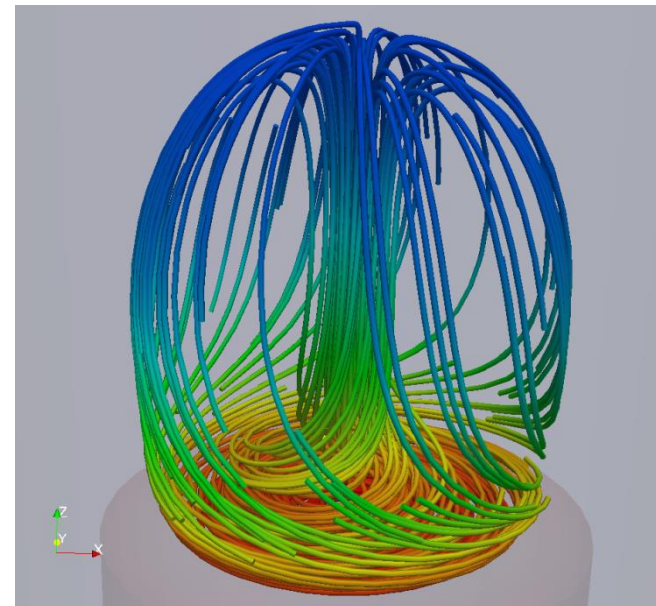


Common Filters: Warp (vector)

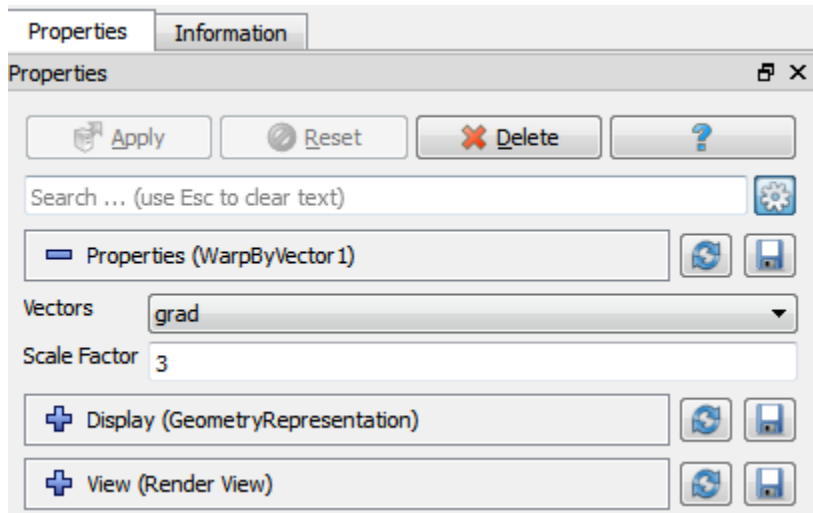


- Displaces each point in a mesh by a given vector field.

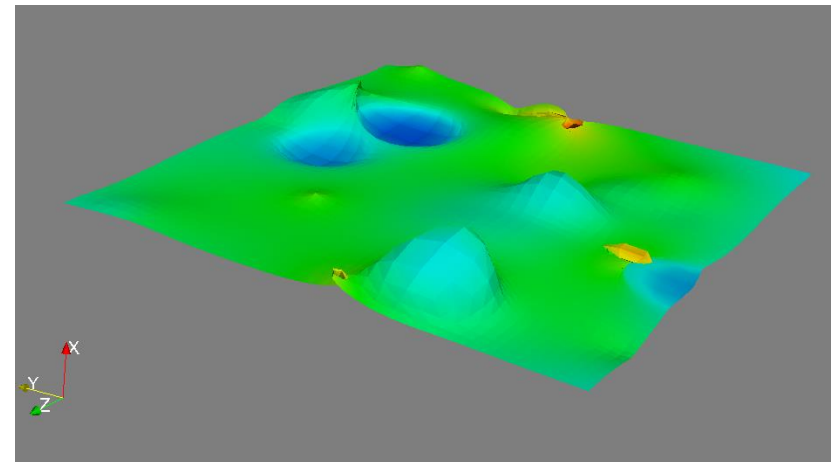

Common Filters: Group Datasets

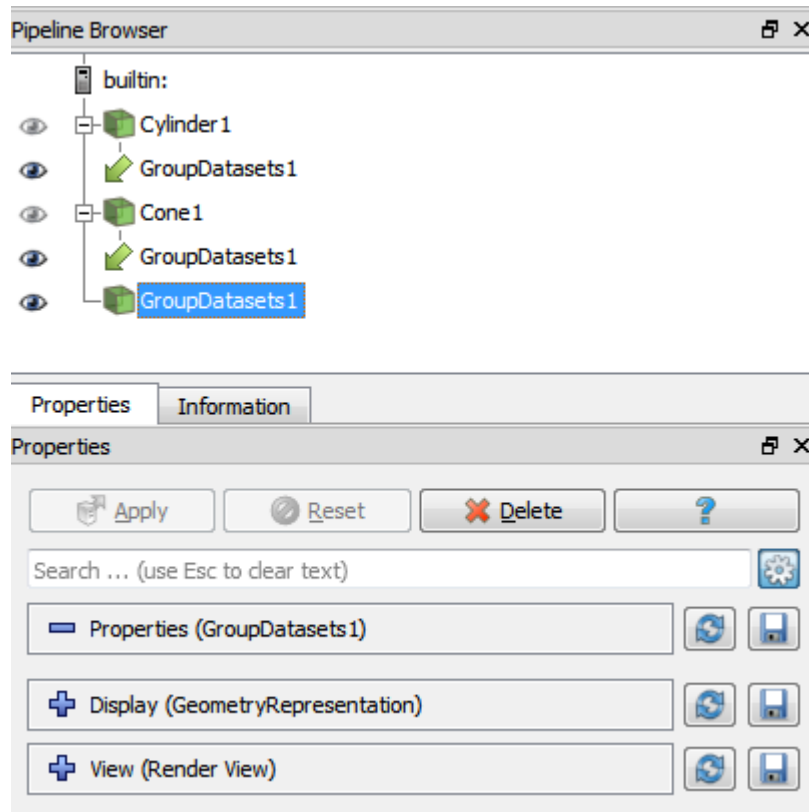


- Combines the output of several pipeline objects into a single multi block data set

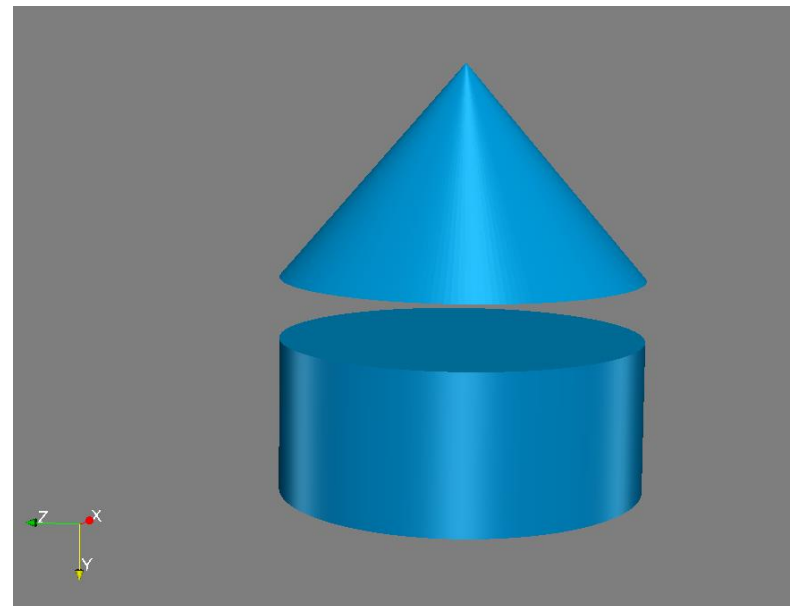

Filter Menu:

Many more filters in the Filters Menu

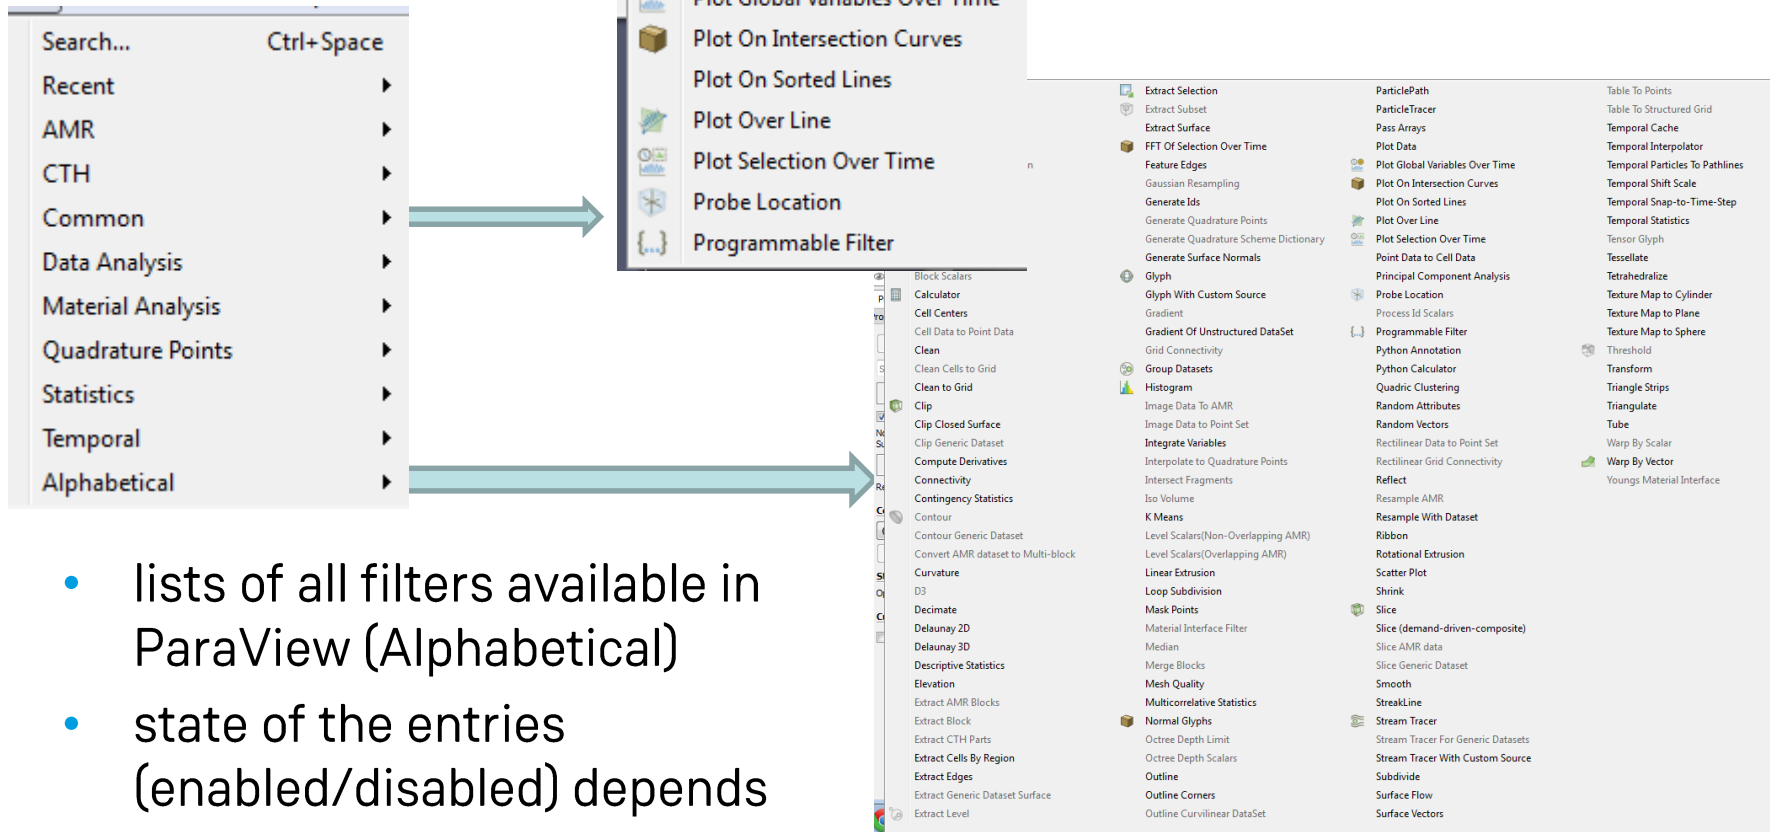

Search... Ctrl+Space

Recent

AMR

CTH

Common

Data Analysis

Material Analysis

Quadrature Points

Statistics

Temporal

Alphabetical

Calculator

Extract Selection

Histogram

Integrate Variables

Plot Data

Plot Global Variables Over Time

Plot On Intersection Curves

Plot On Sorted Lines

Plot Over Line

Plot Selection Over Time

Probe Location

Programmable Filter

Block Scalars

Calculator

Cell Centers

Cell Data to Point Data

Clean

Clean Cells to Grid

Clean to Grid

Clip

Clip Closed Surface

Clip Generic Dataset

Compute Derivatives

Connectivity

Contingency Statistics

Contour

Contour Generic Dataset

Convert AMR dataset to Multi-block

Curvature

D3

Decimate

Delaunay 2D

Delaunay 3D

Descriptive Statistics

Elevation

Extract AMR Blocks

Extract Block

Extract CTH Parts

Extract Cells By Region

Extract Edges

Extract Generic Dataset Surface

Extract Level

Extract Selection

Extract Subset

Extract Surface

FFT Of Selection Over Time

Feature Edges

Gaussian Resampling

Generate Ids

Generate Quadrature Points

Generate Quadrature Scheme Dictionary

Generate Surface Normals

Glyph

Glyph With Custom Source

Gradient

Gradient Of Unstructured DataSet

Grid Connectivity

Group Datasets

Histogram

Image Data To AMR

Image Data to Point Set

Integrate Variables

Interpolate to Quadrature Points

Intersect Fragments

Iso Volume

K Means

Level Scalars(Non-Overlapping AMR)

Level Scalars(Overlapping AMR)

Linear Extrusion

Loop Subdivision

Mask Points

Material Interface Filter

Median

Merge Blocks

Mesh Quality

Multicorrelative Statistics

Normal Glyphs

Octree Depth Limit

Octree Depth Scalars

Outline

Outline Corners

Outline Curvilinear DataSet

ParticlePath

ParticleTracer

Pass Arrays

Plot Data

Plot Global Variables Over Time

Plot On Intersection Curves

Plot On Sorted Lines

Plot Over Line

Plot Selection Over Time

Point Data to Cell Data

Principal Component Analysis

Probe Location

Process Id Scalars

Programmable Filter

Python Annotation

Python Calculator

Quadric Clustering

Random Attributes

Random Vectors

Rectilinear Data to Point Set

Rectilinear Grid Connectivity

Reflect

Resample AMR

Resample With Dataset

Ribbon

Rotational Extrusion

Scatter Plot

Shrink

Slice

Slice (demand-driven-composite)

Slice AMR data

Slice Generic Dataset

Smooth

StreakLine

Stream Tracer

Stream Tracer For Generic Datasets

Stream Tracer With Custom Source

Subdivide

Surface Flow

Surface Vectors

Table To Points

Table To Structured Grid

Temporal Cache

Temporal Interpolator

Temporal Particles To Pathlines

Temporal Shift Scale

Temporal Snap-to-Time-Step

Temporal Statistics

Tensor Glyph

Tessellate

Tetrahedralize

Texture Map to Cylinder

Texture Map to Plane

Texture Map to Sphere

Threshold

Transform

Triangle Strips

Triangulate

Tube

Warp By Scalar

Warp By Vector

Youngs Material Interface


- lists of all filters available in ParaView (Alphabetical)
- state of the entries (enabled/disabled) depends on the current data set's type

Exercise III:

Applying filters, creating Visualization Pipelines


1. Applying Filters

- Open the file: disk_out_ref.ex2
- Add a Contour Filter, select variable Temp and set the isosurface value to 400
- Use variable V to color data
- View the data as a wireframe and the filtered contour as a isosurface

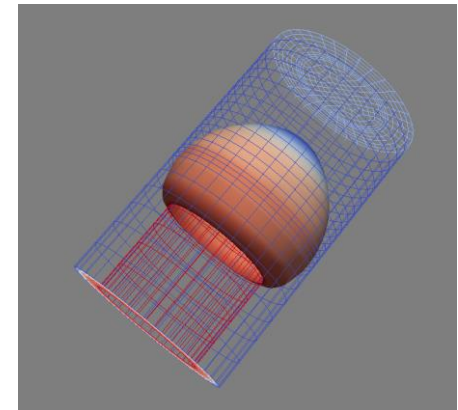

2. Creating Visualization Pipelines



- Add (to the original data) an additional **Extract surface filter** (see: Filter - alphabetical)
- Create a **Clip filter** to **Extract surface filter**
- Make Contour and Clip visible

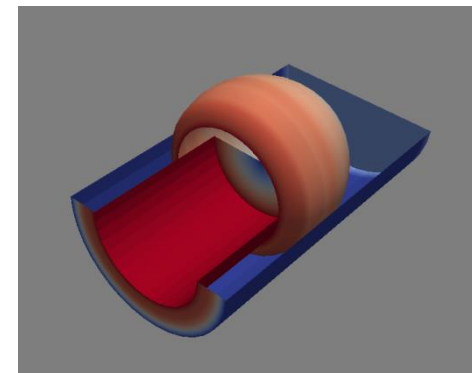

Exercise IV: Streamlines, Volume Rendering

1. Vector Visualization: Streamlines



- Open the file: disk_out_ref.ex2
- Select a **Stream Tracer Filter**, Add a **tube filter**
- Add a **glyph filter** to the **Stream Tracer Filter**.
Set Vectors to V, show the glyphs as cones and color them with variable Temp
- Play with the glyphs parameters until the result pleases you

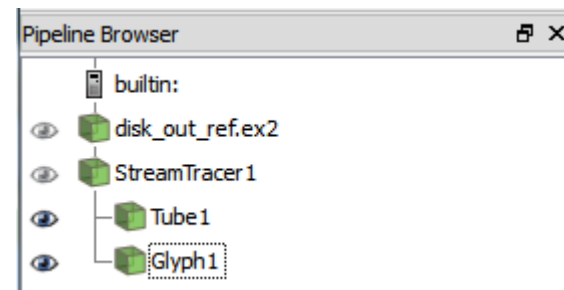

Exercise IV: Streamlines, Volume Rendering

2. Volume Rendering


- In previous example:
Change the representation of the input data to **Volume**
- make the input data visible,
- Choose Temp for the coloring and make color legend visible

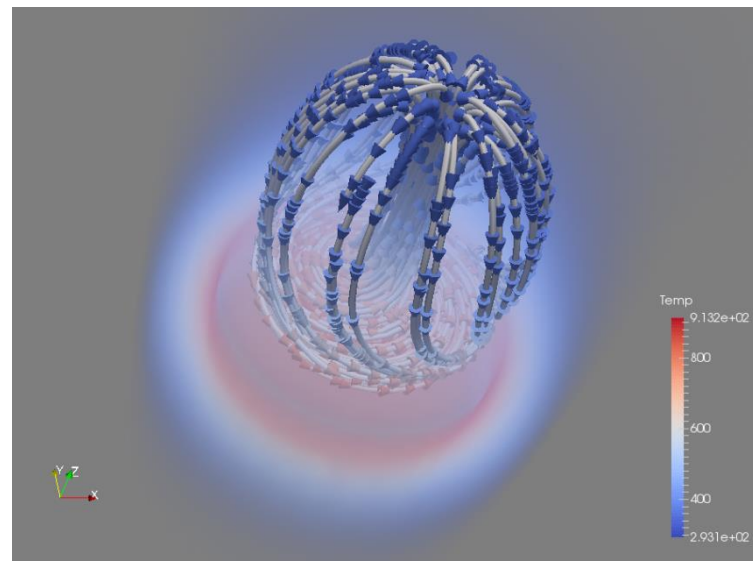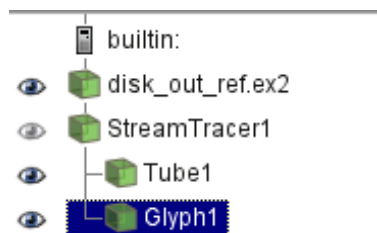

Changing the color map

- Via Color Map Editor (View->Color Map Editor, )

- ParaView provides a number of preset color scales 

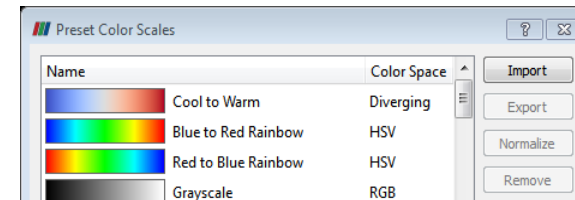

- To add another color/value pair to the mapping function (double-)click into the gradient bar  (or add it manually into the table underneath)
- (Double-)click into the graph to modify the opacity transfer function.

Multiple Views


Achievements so far:

- Coloring with one variable, extract iso surfaces with another one, streamlines ...

But: still difficult to make correlations between the variables!

➤ Use **Multiple Views**!

- Each view can show an independent aspect of the data
- 2D (e.g. histograms, line charts, spreadsheets ...) and 3D views are possible

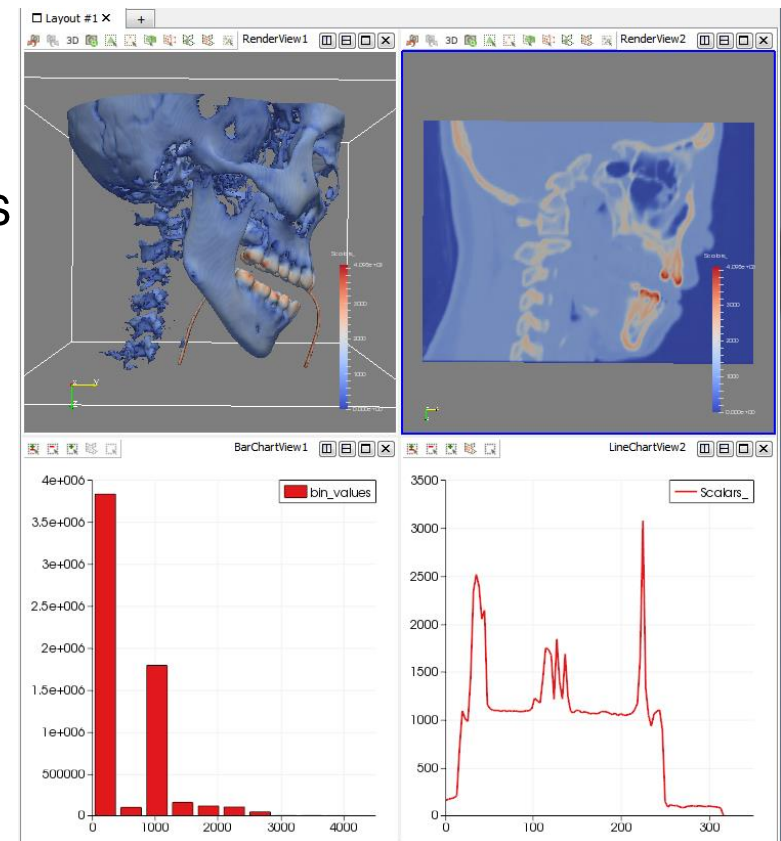


Multiple Views


- Multiview is not limited to only two views
- Each view has its own set of multiview buttons  to split horizontally/vertically or erase the view:
- The view with the blue border is the active view
 - The display and view parameters in the Properties Panel depend on the active view (and on the selected item in the Pipeline Browser).
- The views can be changed in size by clicking in the space between views
- Swap two views by clicking and holding on one of the view toolbars and dragging onto one of the other view toolbars

Multiple Views: Linking the Camera of RenderViews

- Make Views comparative by adding Camera Links:
 - Right click on one of the views over the background
-> Link Camera, then click in the view to link with
 - The two cameras are linked, both draw the view from the same viewpoint

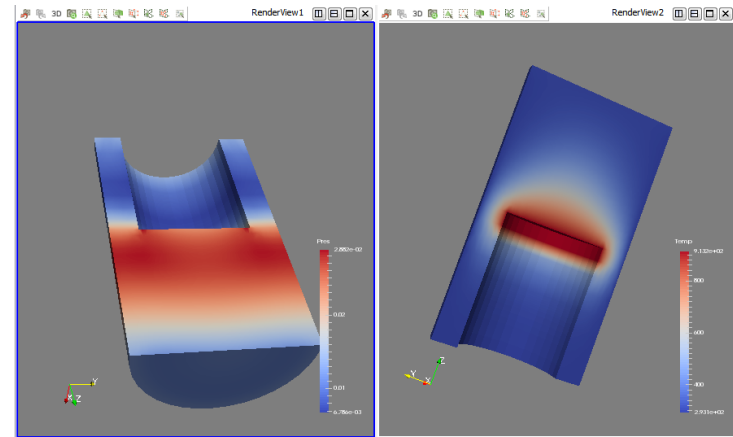


↓ Link Camera

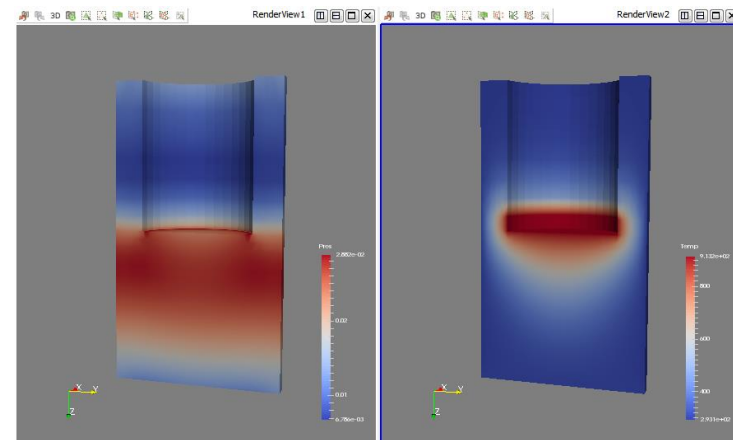

Comparative View


Visualize several representations of the same scene, but with different parameters to make parameter studies

- Open a new view and select Render View (Comparative)
- Enable the comparative view inspector in the View Menu
- Choose a layout (e.g. 2x2)
- Select the parameter(s) you want to vary (upper panel)
- Adjust the parameter for the views (lower panel)
 - Either click on one cell in the parameter table, OR
 - Select a range of cells and enter a parameter range

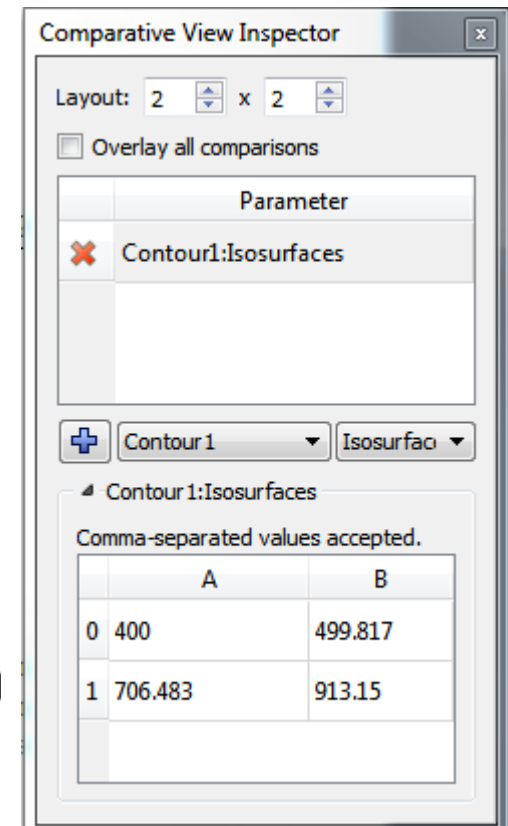


Comparative View

Example: Visualization of a contour with 4 different isovalues

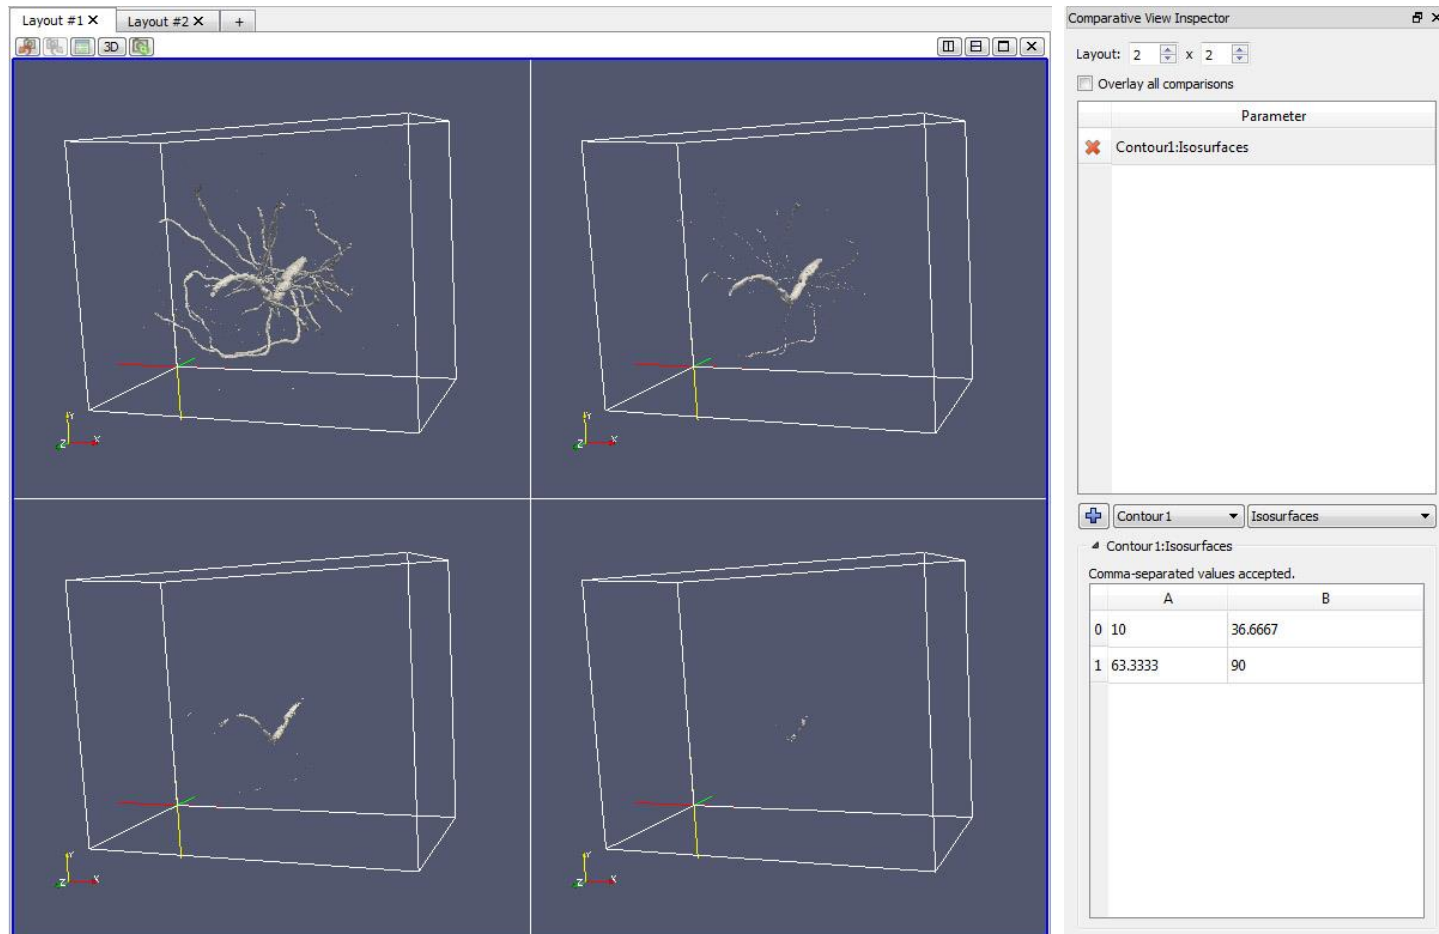

Plotting

- mechanism to drill down into your data to allow quantitative analysis.
- Plots are usually created with filters (Filters->DataAnalysis)
- also: data analysis toolbar containing the most common data analysis filters, some of which are used to generate plots.



Plot Global Variables Over Time




Plot Over Line



Plot Selection Over Time

Plotting Example: Plot over a line in space

- Hit Plot Over Line from the Data Analysis Toolbar
- Place a Line Widget in the 3D space, hit Apply
- Choose the variables you would like to see in the Line Chart View (in the Properties Panel, while Line Chart View and the Plot Over Line filter are active!)
- Line plot allows for a different scale on the left and right axis -> scale each variable individually on each axis.
- save the plot as a screenshot (File-> Save Screenshot) or export it to a vector graphics that scales properly (File->Export Scene).

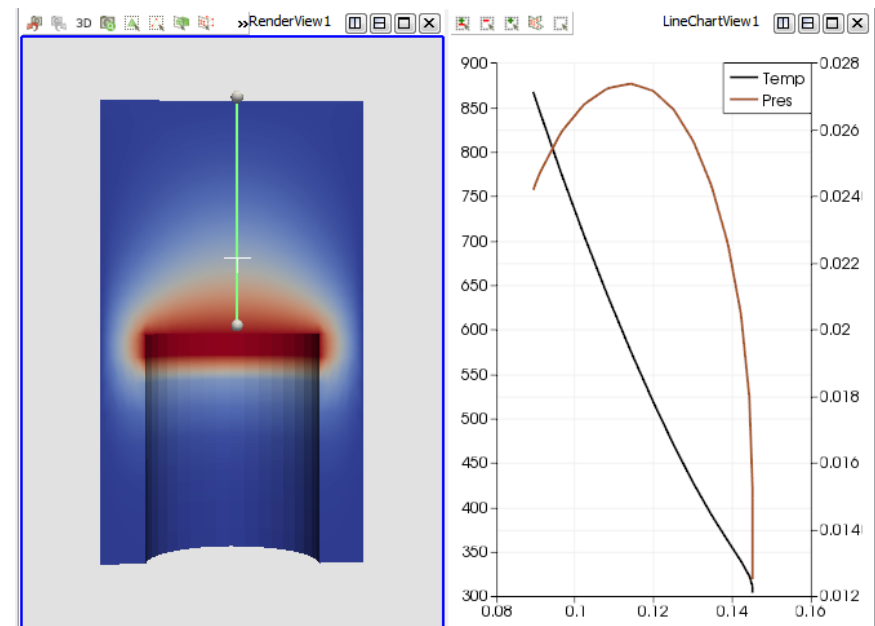

Exercise V: Plotting



1. Creating a Plot Over Line:

- Open disk_out_ref.ex2, load all variables
- Add a Clip filter, uncheck the Show Plane checkbox in the Properties Panel, click apply
- Click on disk_out_ref.ex2 to make it the active object and select the plot over line filter.
- Try to position the line segment in 3D space
 - try grabbing and moving the handles, the line itself, different mouse buttons, press “p” for picking a point under the curser)
- Finally, hit the button “Z Axis” in the Properties panel, hit apply

Exercise V: Plotting (continued)


2. Changing the display options

- Make the plot view active and deselect all variables except for Temp and Pres
- Select Pres Variable in the Display options of the Properties panel
- Change the Chart Axis to Bottom-Right
- Add annotations to the left and right Axis (Temperature, Pressure)

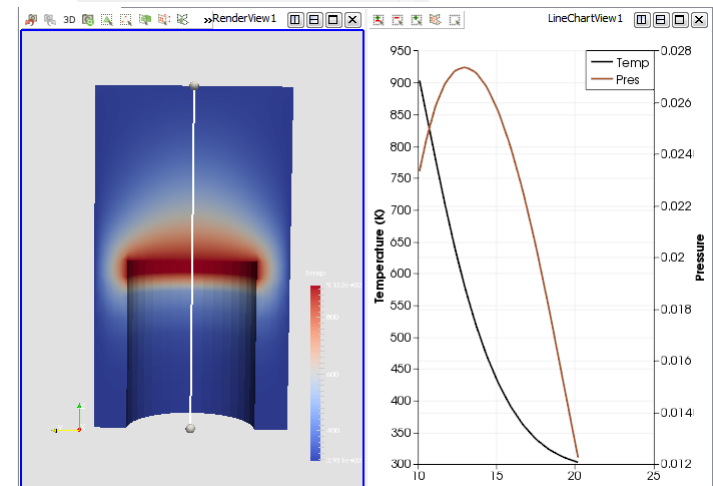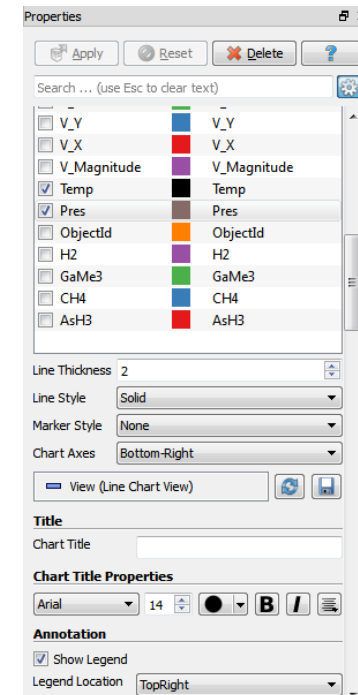

Text Annotation


- Use Text source to place some text in the 3D view
- Drag it with the mouse to the position you like
- Use the Display section of the property panel to change the appearance of the Text (font, size, position, color)
- ParaView supports MathText markup for equation rendering

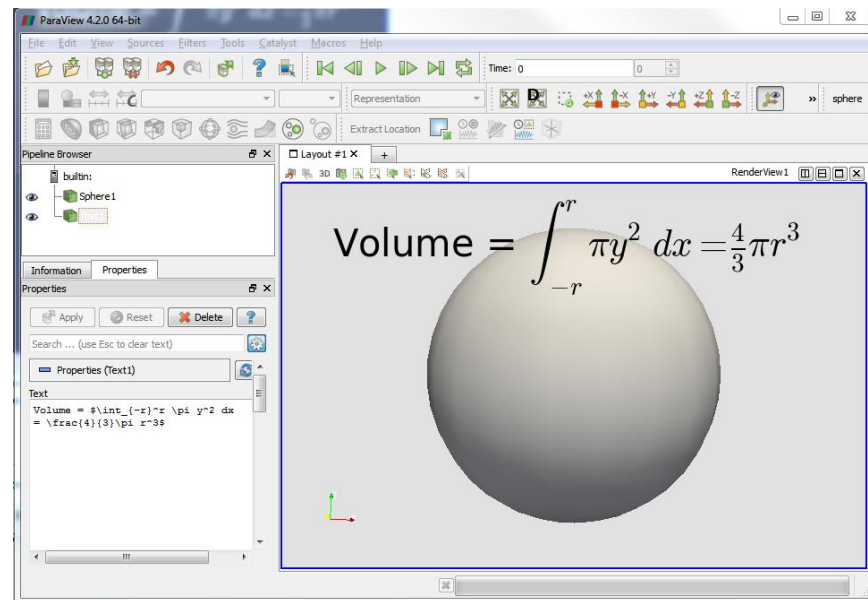


(See <http://matplotlib.org/users/mathtext.html> for details)

Time in ParaView

- ParaView supports visualization of temporal data providing
 - Readers for file series and datasets containing several time steps
 - Temporal filters, e.g.
 - Annotate Time
 - Temporal Interpolator (good for mesh deformations, topology has to remain consistent!)
 - Particle Tracer
- Toolbars: VCR Controls, Current Time Controls:






Controlling Time: Animation View

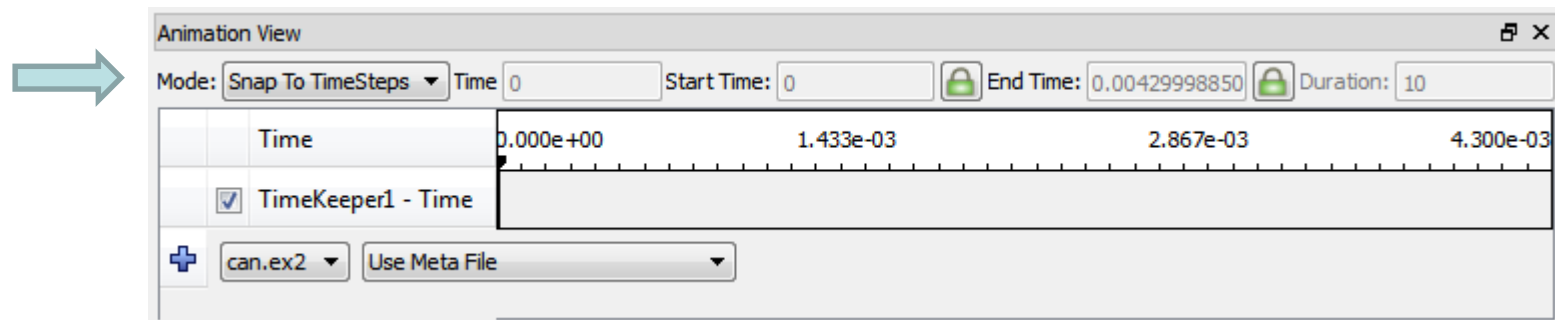

- **Animation Mode:** determines how ParaView steps through time during playback
 - **Snap To TimeSteps:** plays exactly those steps defined by your data
 - **Sequence:** Specified number of frames equally spaced between start and end time
 - **Real Time:** animation lasts approx. the specified number of seconds
 - Default: Snap to TimeSteps


Exercise VI: Time Dependent Data

- Open the file: can.ex2
- Set the view direction to +y
- Add an Annotate Time filter to observe time changes
- Animate the mesh

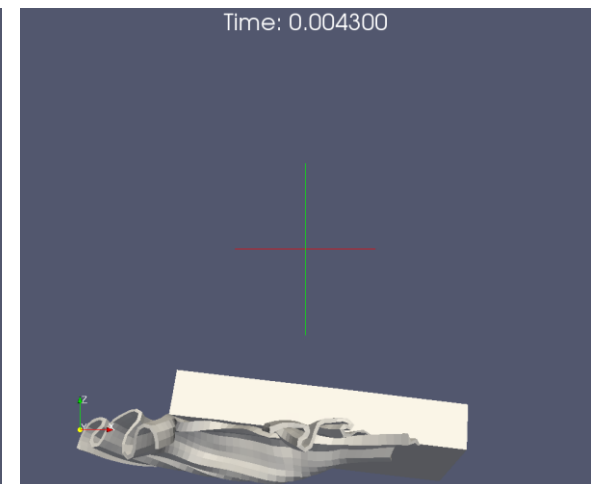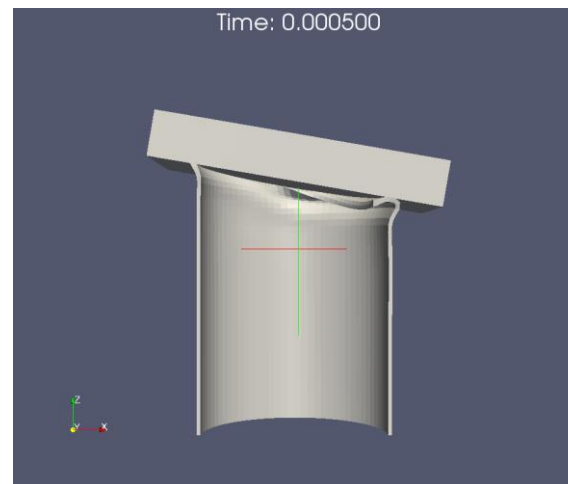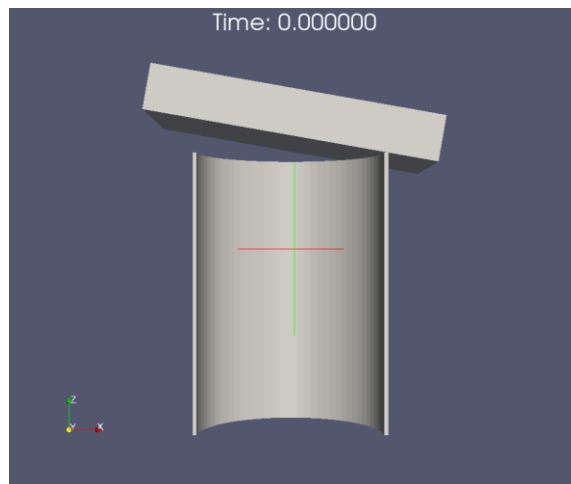


Exercise VI: Time Dependent Data (cont.)

- Split the view horizontally and apply the **Temporal Interpolator Filter** to the data.
- Select **Real Time** as animation mode, set duration to 30 seconds
- Link the cameras
- Hit **Play**

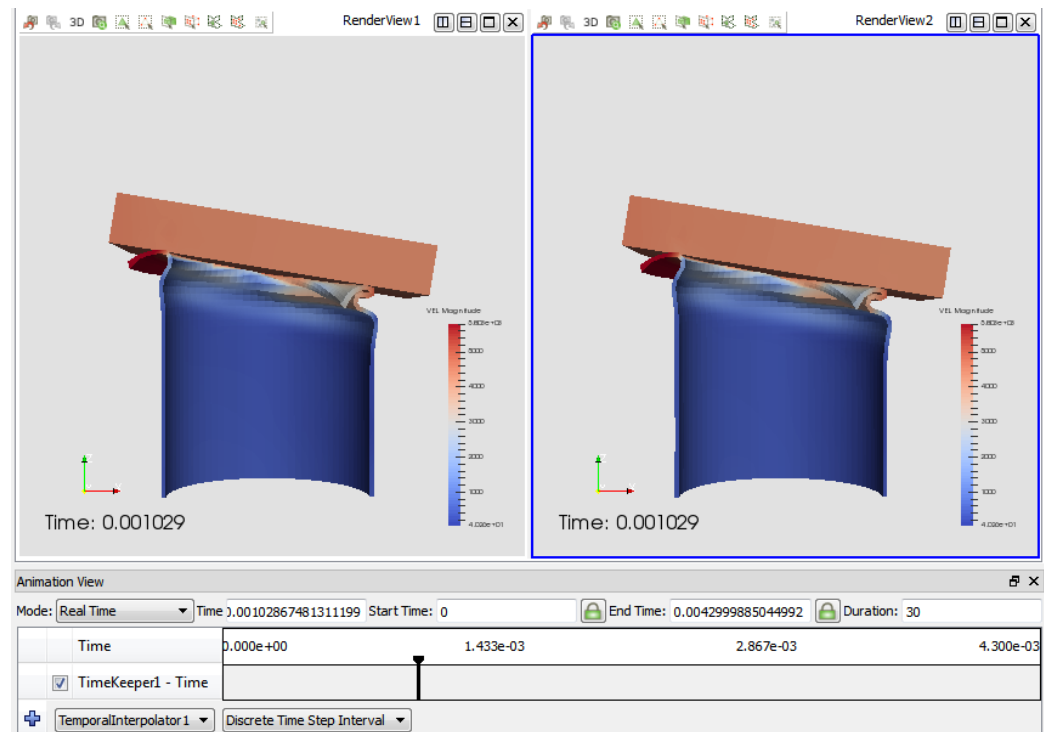

Exercise VII: Time Dependent Data, Comparative View


- Reset the session and open the file can.ex2, enable all variables.
- Color the surface by VEL
- Generate a comparative view with a 3x2 layout showing 6 different time steps.

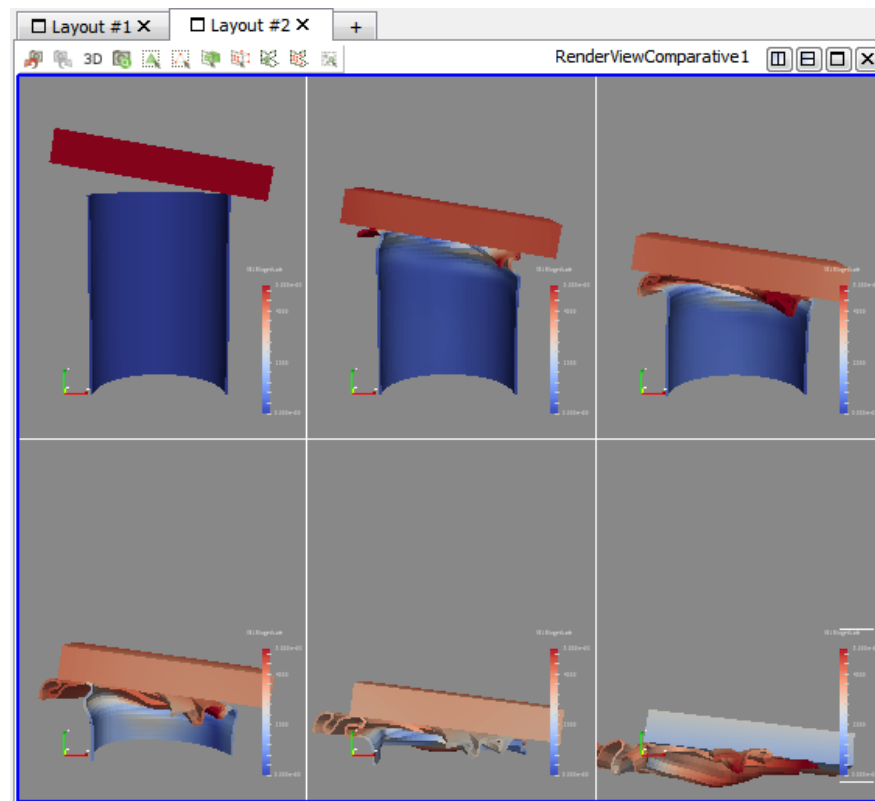

Animations


With ParaView, you can animate

- Data time steps
- nearly any property of any pipeline object
- The camera, to perform camera flights along a specified path or orbit.

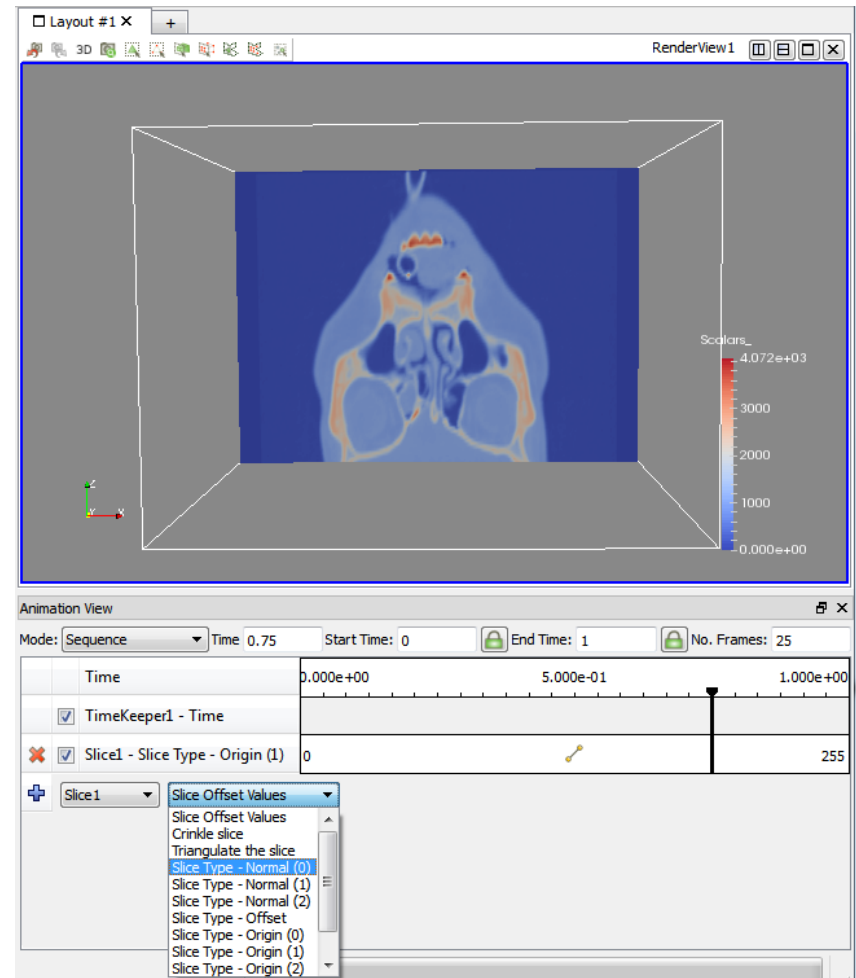


Animating Properties

- Select object and property from the combo boxes within the Animation View, press 
- A new track is created, holding key frames that specify values for the property at a specific time instance

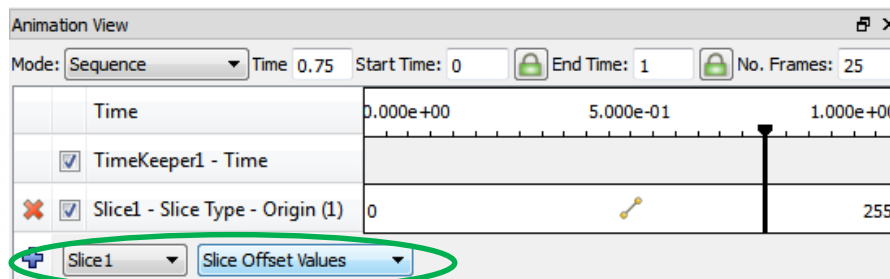


- Double-click at the new track to edit the keyframes:

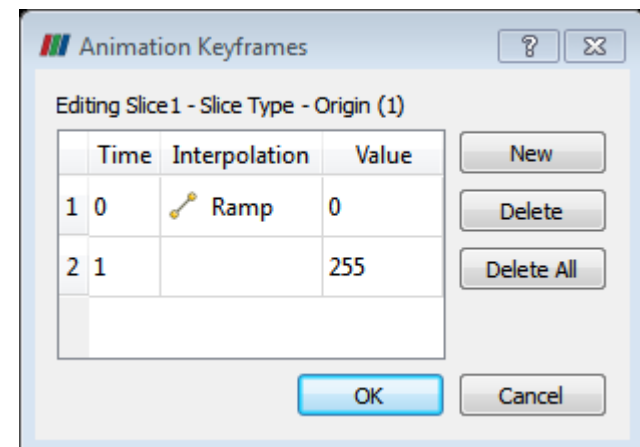



Animating the camera

- Select “Camera” in the object combo box within the Animation View.
- Choose one of the options:
 - “Orbit” and “Follow Path” to create a (closed) spline widget around your data along which the camera is animated
 - “Follow Data” to zoom to the data in every step of the animation.
 - “Interpolate camera locations” to create a path between two or more locations.
- Double-click at the new element to edit the keyframes

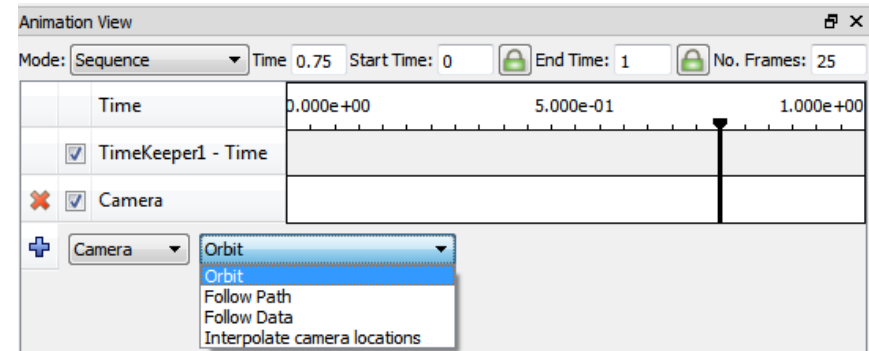

Saving Screenshots and Animations




- File -> Save Screenshot
 - Save the current view(s) as PNG, BMP, TIFF, PPM, JPEG, PDF
- File -> Export Scene
 - save your Image as a vector graphic
- File -> Save Animations saves the current animation as
 - Ogg/Theora (many open source viewers)
 - AVI (windows, some open source viewers)
 - JPEG, TIFF, PNG (creates a flipbook)

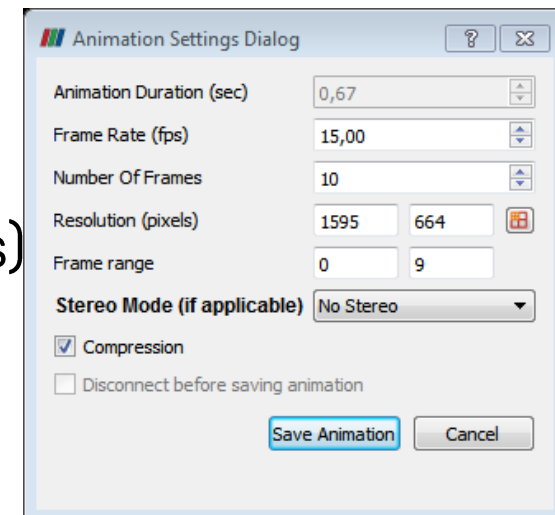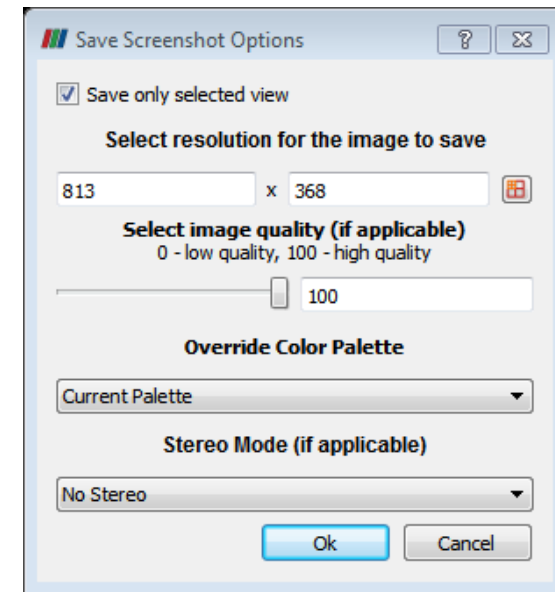

Exercise VIII: Animations

1. Animating Properties

- Create a sphere from the Sources-Menu
- Animate the Start Theta property of the sphere from 0 to 360.
- Set Number of Frames to 50.
- Save the animation as an AVI file.





2. Modifying Animation Track Keyframes

- Modify the animation track so that the sphere first becomes smaller, from 360 to 0 degrees, and then becomes greater 0 to 360 degrees



Exercise VIII: Animations (cont.)

3. Animating the camera
 - Create a Box from the Sources-Menu
 - select “real time” as animation mode and 10 seconds duration
 - Animate the camera in an orbit around your box
4. Modify the key frames of the Orbit
 - Open the key frame editor, double-click on “Path ...”
 - Select “Camera Position” in the Key Frame Interpolation Dialog
 - Modify the Spline Widget (now visible in the 3D view) in some way

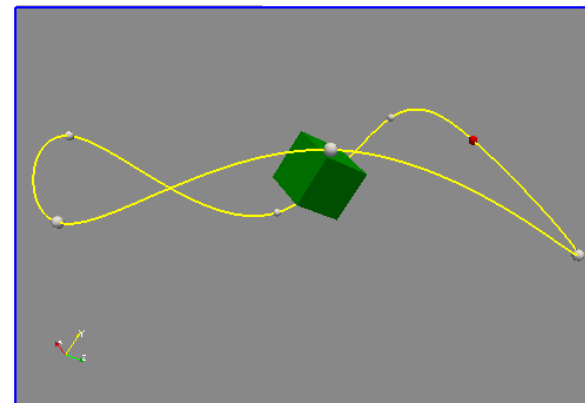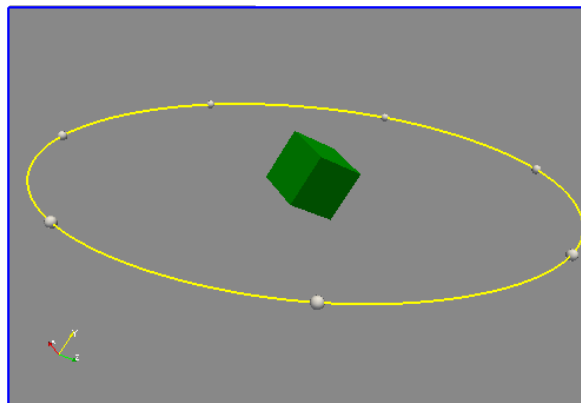

Visualizing Large Models

ParaView is meant for extremely large data processing:
Examples from Sandia National Lab in the web:

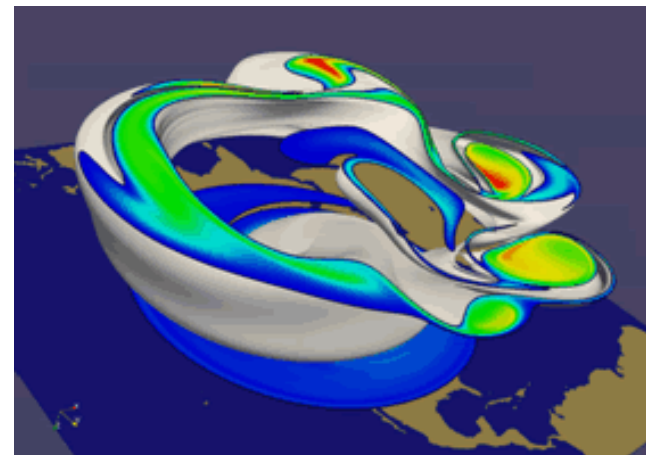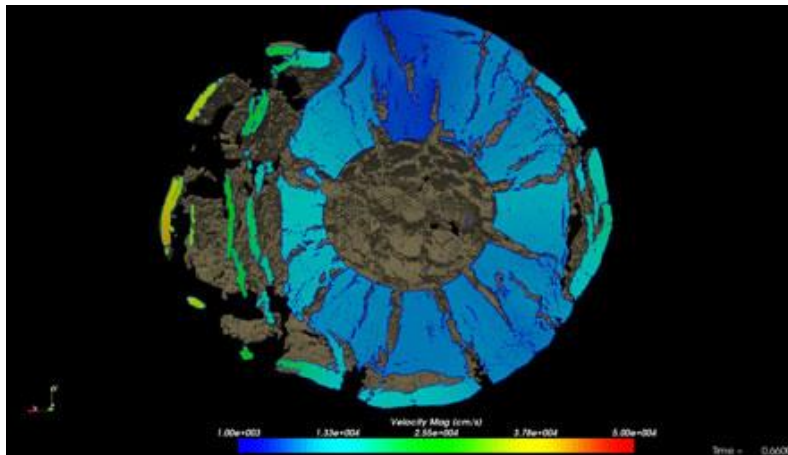


(about 1 billion cells on 256 nodes)

- Visualizing extremely large data requires a big amount of resources (especially memory)
- Use parallel visualization capabilities of ParaView


Parallel ParaView

- ParaView has three main components:
 - GUI (paraview)
 - Data Server (pvdataserver)
 - Render Server (pvrenderserver)
- } Server (pvserver)

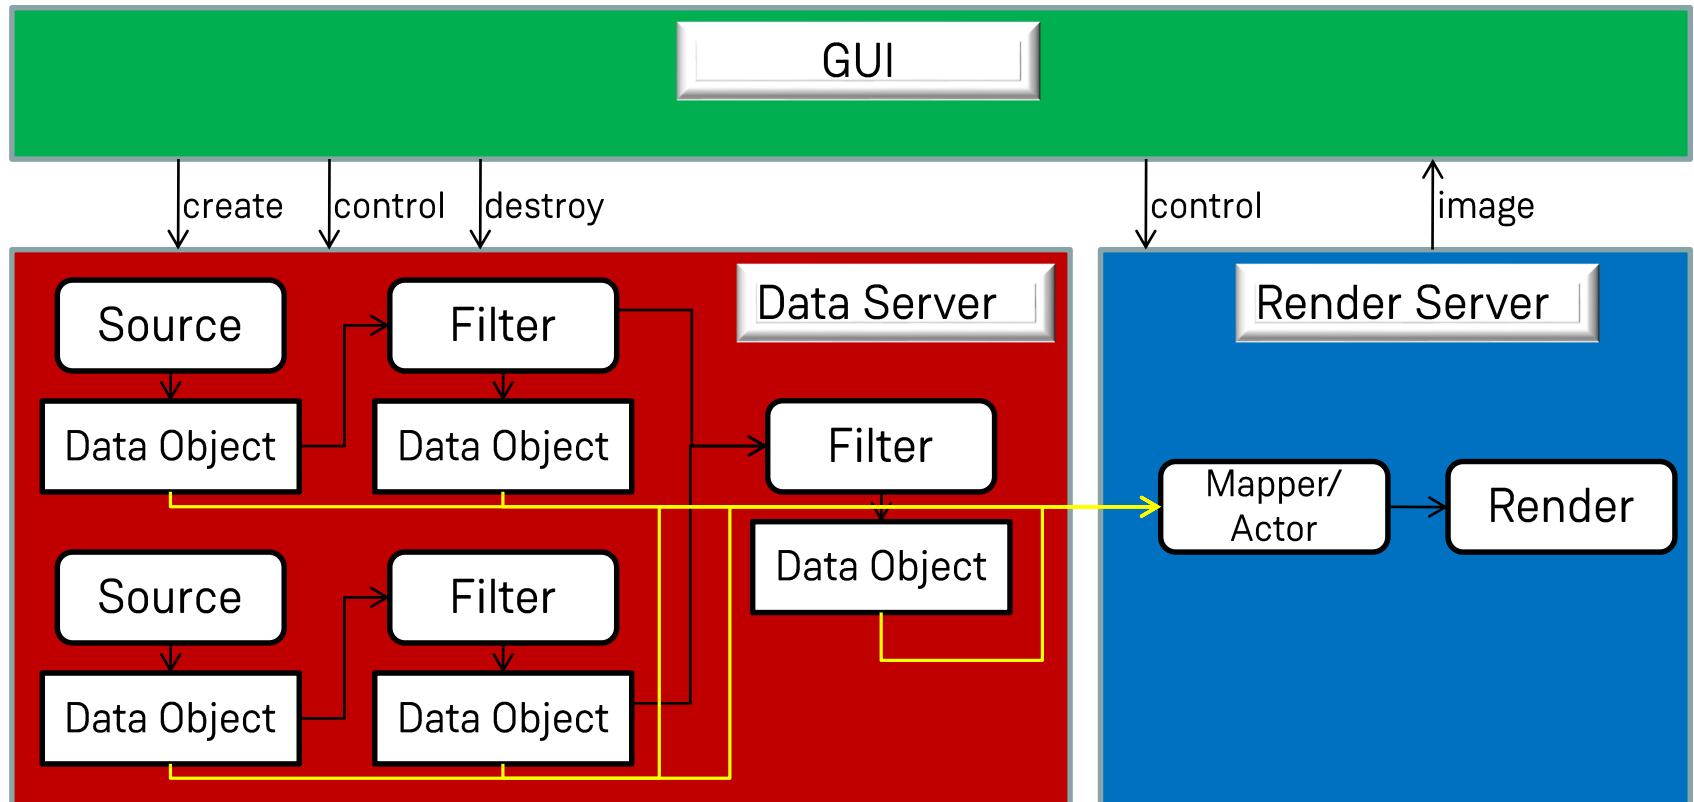

Parallel ParaView (continued)


- ParaView can be started in non parallel (standalone) mode:
 - All three components in one single process
 - *command: paraview*

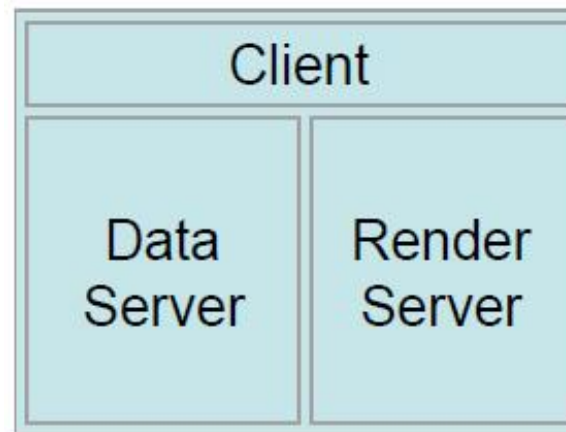

Parallel ParaView (continued)

- ParaView can be started in two parallel modes:

1. Local client and parallel server
(data server and render server
in one job)

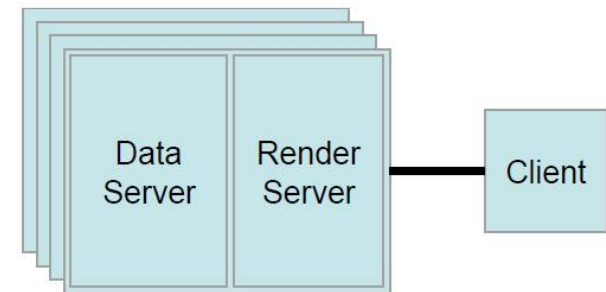


- command on local client: *paraview*
- command on remote cluster:
mpiexec -n <num_processes> pvserver
- connect client and server

Parallel ParaView (continued)

2. Local client and parallel data and render server (data server and render server may run on different machines)

- command on local client: *paraview*
- command on data processing server:
*mpiexec -n <num_dataserver> pvdataserver
-m=machines.pvx*
- command on render server:
*mpiexec -n <num_renderserver> pvrenderserver
-m=machines.pvx*

(num_dataserver >= num_renderserver)

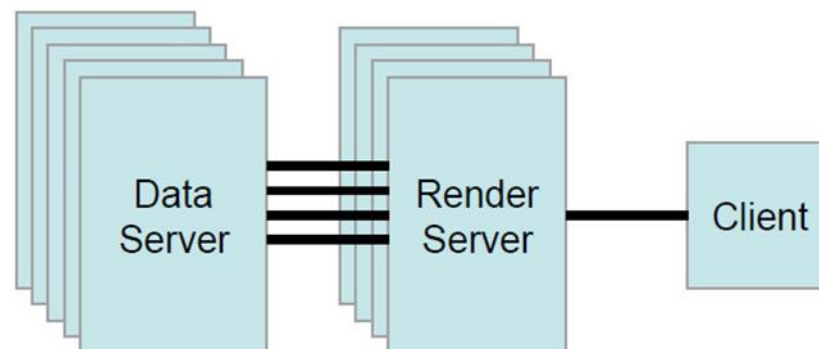

Parallel ParaView (continued)

Guideline:


- Cost of connecting data server and render server over TCP sockets often overwhelms the benefit!
 - run data server and render server in one process!
- Avoid X11 forwarding! (inefficient, lots of low level communication underneath)
 - Run client on desktop, NOT on login-node
 - Or use VNC+VirtualGL on login-node (our recommendation)

Advantages of using Parallel ParaView:


- Local view on remote data: “File -> Open” shows you the data server’s file system => big data may stay on the server!

Data Distribution


- Data needs to be distributed on a cluster (load balancing, memory usage)
- Some visualization algorithms work directly on distributed data, e.g. clipping

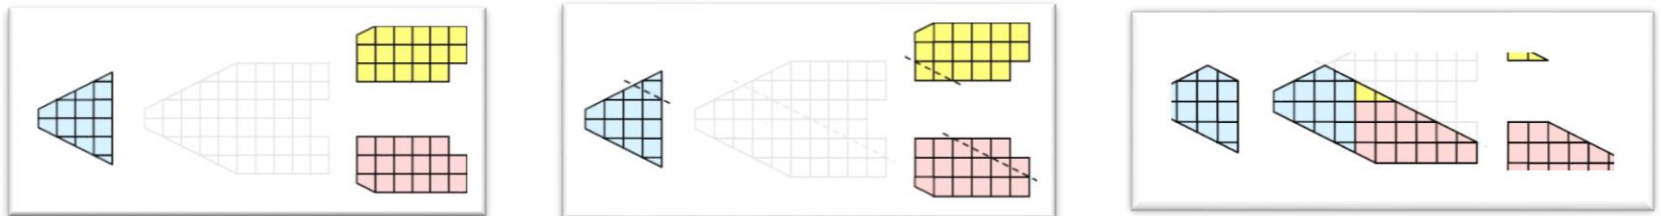

- Other algorithms need ghost cells, e.g. external faces

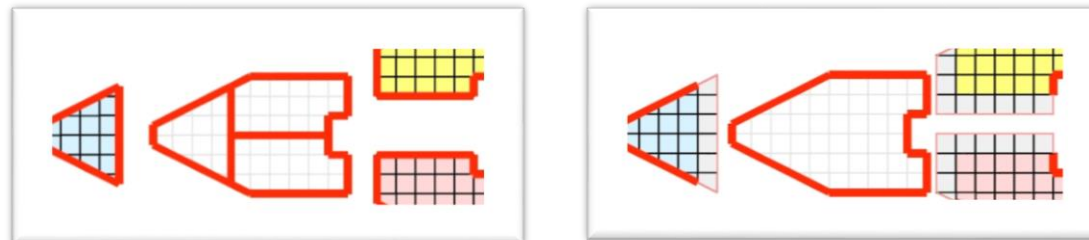

- Structured data is handled automatically (partitioning and ghost cells)
- For unstructured data use the D3 filter
- Example: extract surface filter with and without D3:

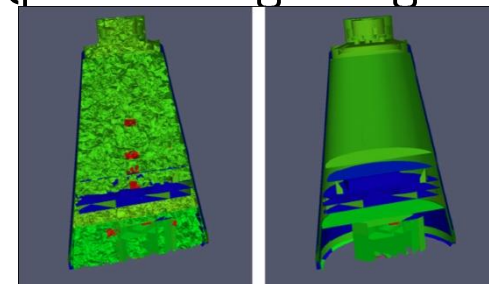


Memory Footprint

- Memory footprint of structured data is MUCH lower than unstructured data, because topology (and maybe geometry) is implicitly given
- Many filters need to convert structured data to unstructured data: BEWARE OF DATA EXPLOSION!
 - Examples: clip, threshold,, many, many others!
 - Some filters reduce the dimensionality → less dangerous
Examples: contour, slice, stream tracer
- “Save” filters just don’t change the data structure but only add new data values (attributes)
Examples: calculator, gradient, curvature


Remote Rendering

- **Server side rendering** and
- **client side rendering** possible:

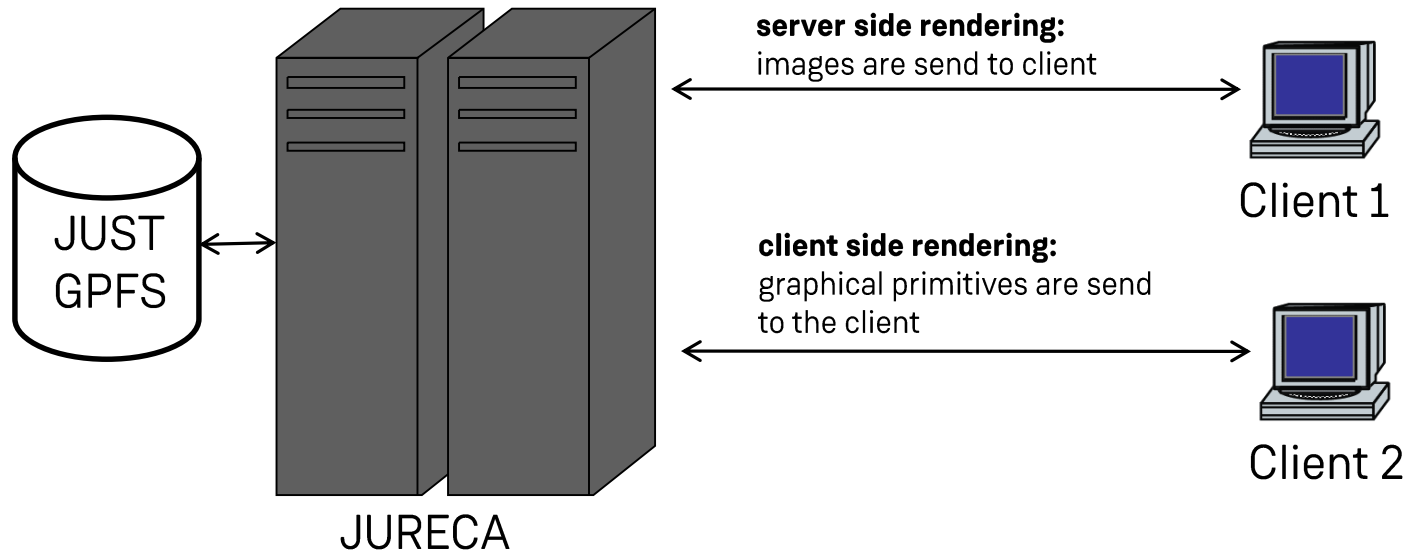

Remote Rendering (Parallel Rendering)

- Depth Compositing: All nodes will render their own part of the data (local data)
 - Nodes keep their color in depth buffers and cooperate to decide what the color of each pixel is based on the depth value
 - Implemented with the ICE-T compositing lib

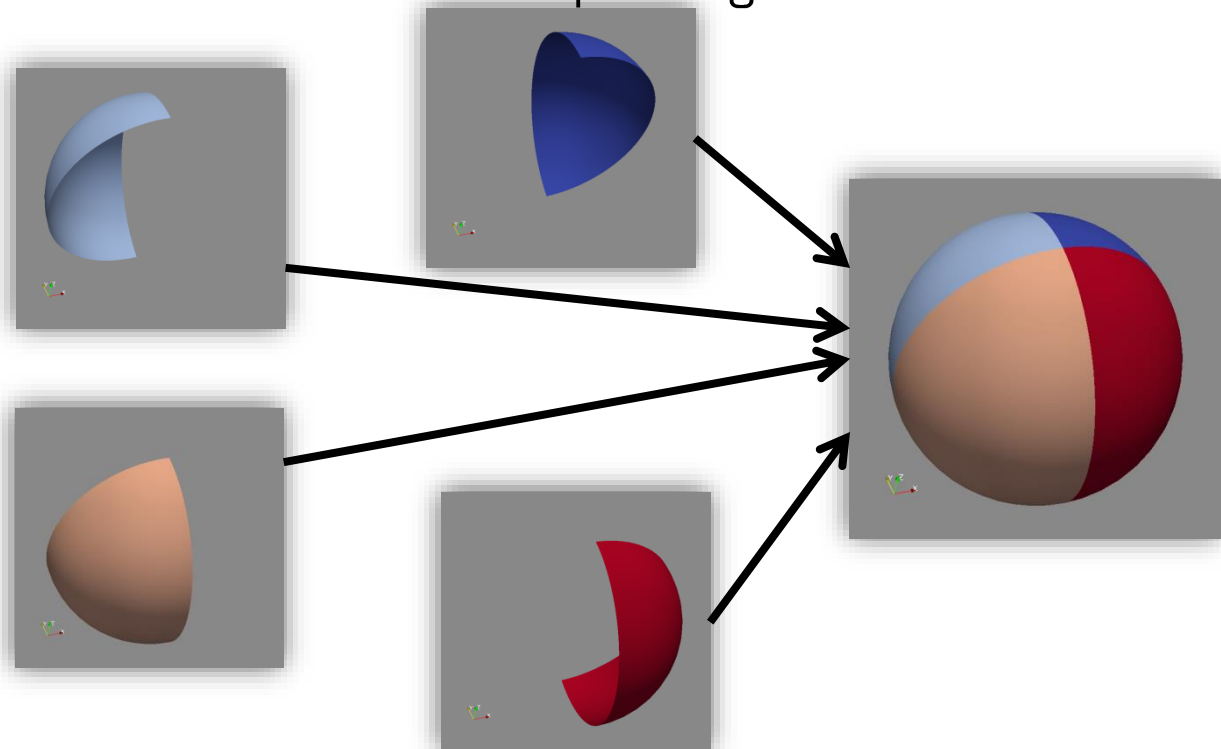


Remote Rendering

- Recommended settings for Remote Rendering:
 - Edit -> Settings -> Render View:
 - Disable use of display lists!
 - Remote render threshold: set the data size beyond which to render the data remotely
 - First, try the presets for recommended settings for the remote render threshold

Visualization on JURECA

- With JURECA, JSC offers computer resources of the highest performance class to its users:
 - 1872 compute nodes
 - 12 visualization nodes equipped with
 - *Two NVIDIA K40 GPUs per node*
 - *10 nodes with 512 GiB memory*
 - *2 nodes with 1024 GiB memory*
 - 2 vis-login nodes providing direct user access: JURECAVIS
- See http://www.fz-juelich.de/ias/jsc/EN/Expertise/Supercomputers/JURECA/JURECA_node.html for more details about JURECA

Visualization on JURECA (Hardware Components)

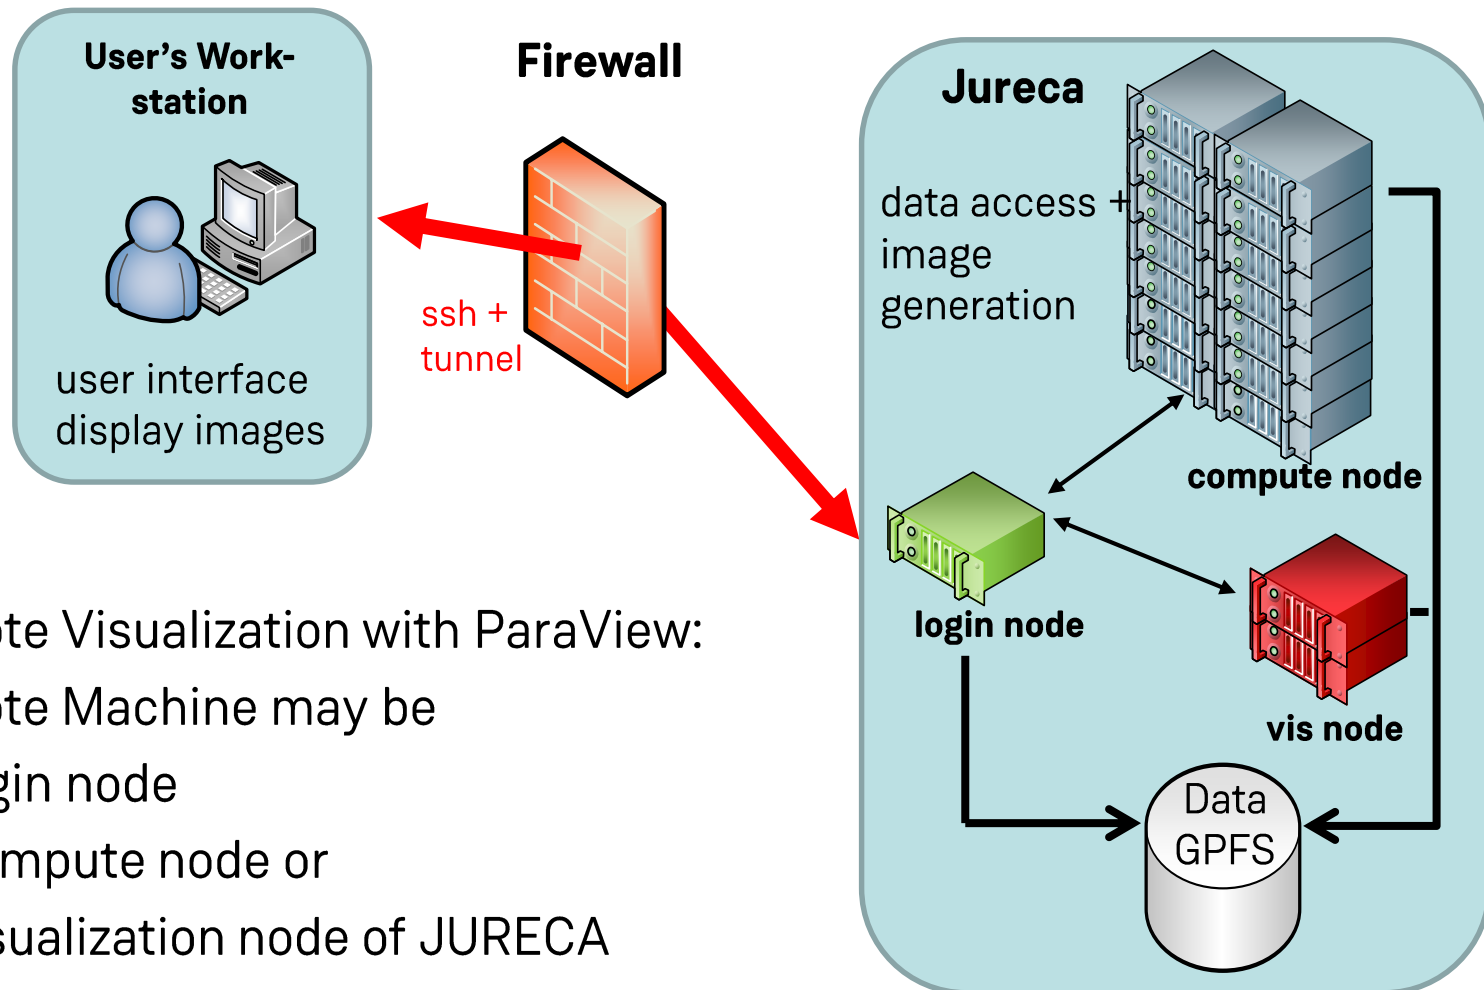

Remote Visualization with ParaView:
 Remote Machine may be


- login node
- compute node or
- visualization node of JURECA

Visualization on JURECA

- Various approaches possible!
- Demonstrated in this course:
 - **ParaView in Client-Server** mode with server running on
 - *Login node (non-parallel)*
 - *Compute node(s)*
 - *Visualization node(s)*
 - **Virtual Network Computing** (VNC) in conjunction with ParaView

Remote ParaView in Client-Server mode


Server running on login node/compute node(s)

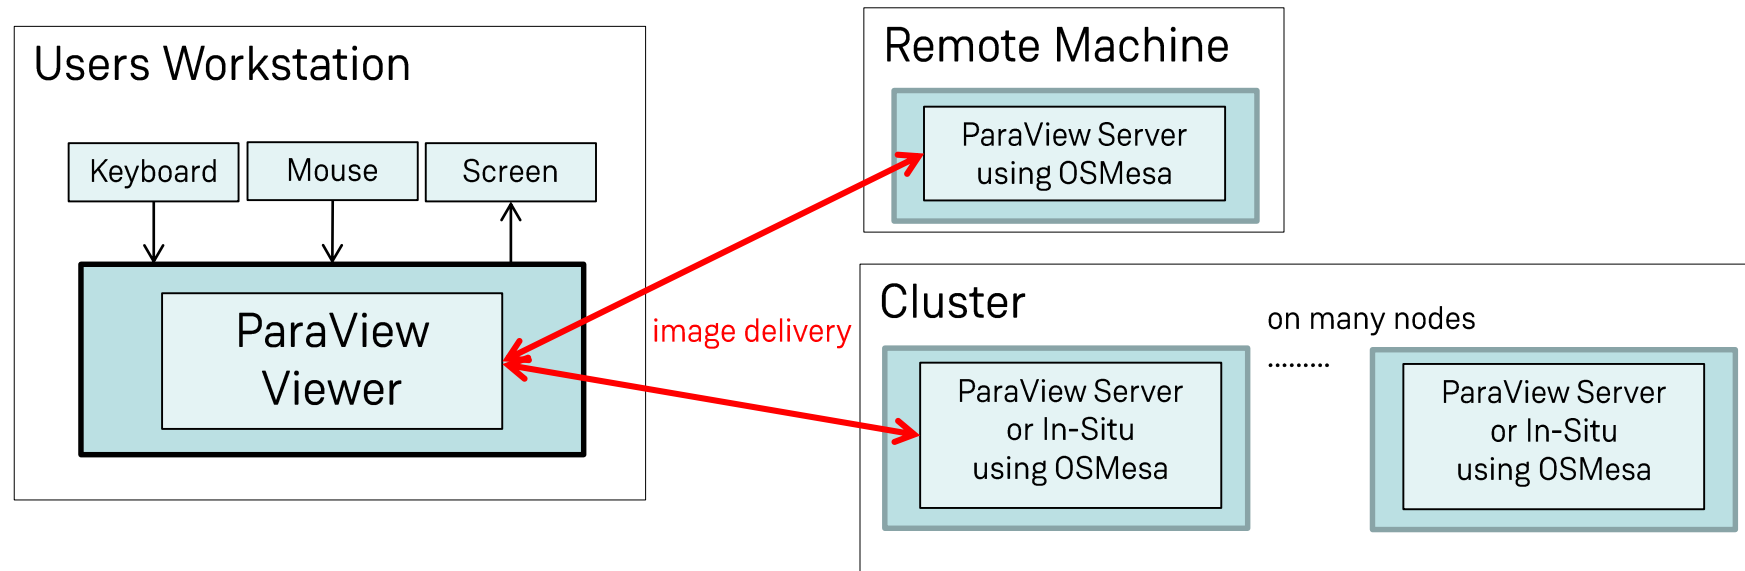

- + using OSMesa -> no GPU or X Server needed on remote machine
- + cluster:
 - parallel rendering possible, large aggregate resources available (cpu, memory, I/O)
 - in-situ visualization possible
- user has to install ParaView locally,
 - must match the version on remote machine
- software rendering is slow

Remote ParaView in Client-Server mode


PVserver on login node:

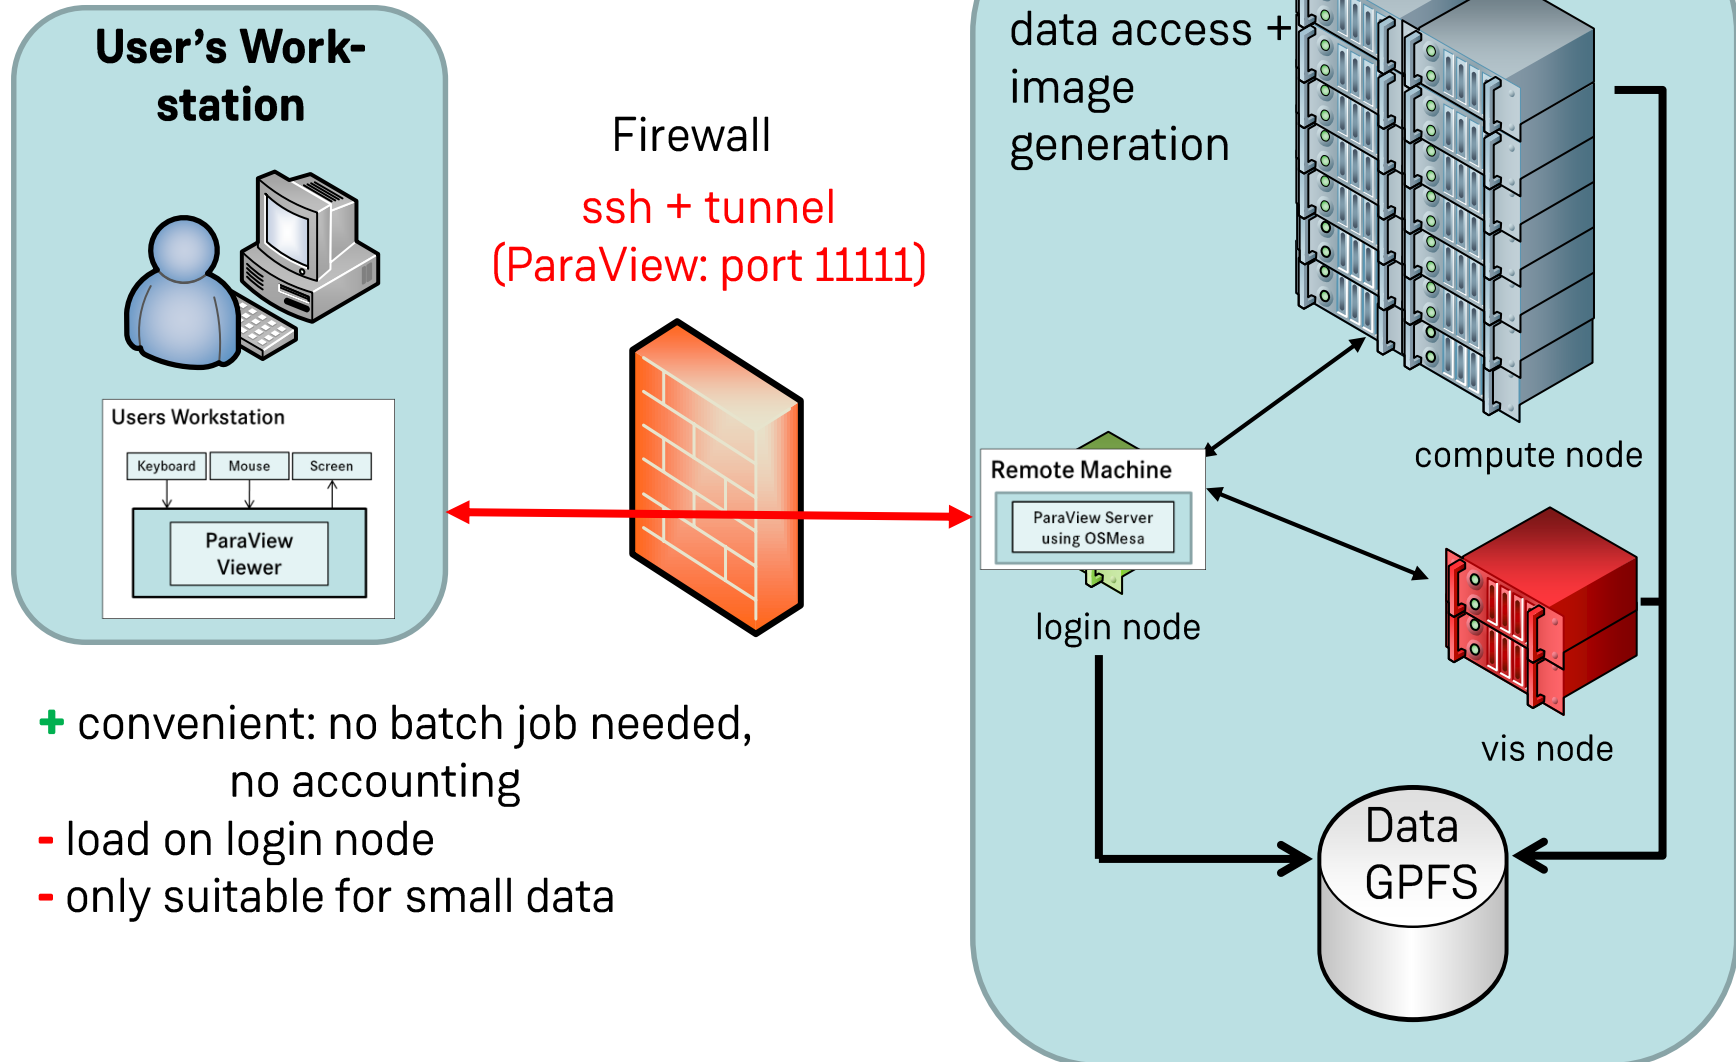

- + convenient: no batch job needed,
no accounting
- load on login node
- only suitable for small data

Remote ParaView in Client-Server mode


PVserver on compute node

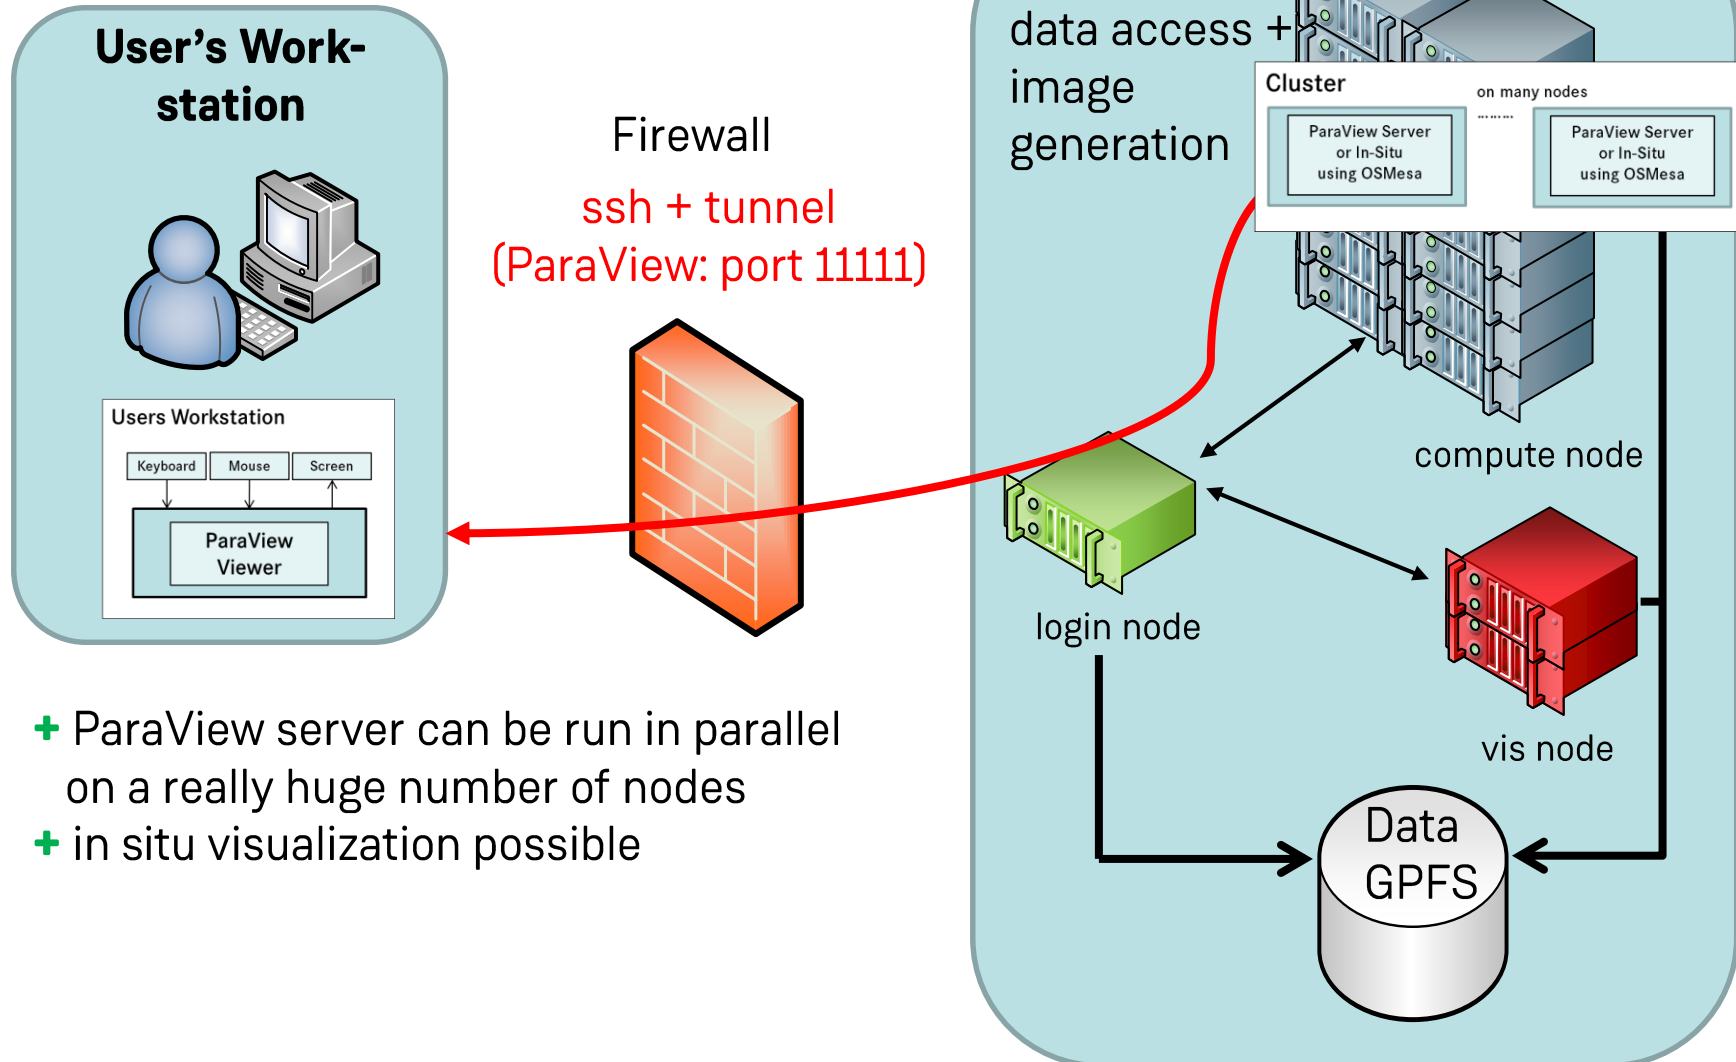

- + ParaView server can be run in parallel on a really huge number of nodes
- + in situ visualization possible

Remote ParaView in Client-Server mode


Server running on visualization node(s)

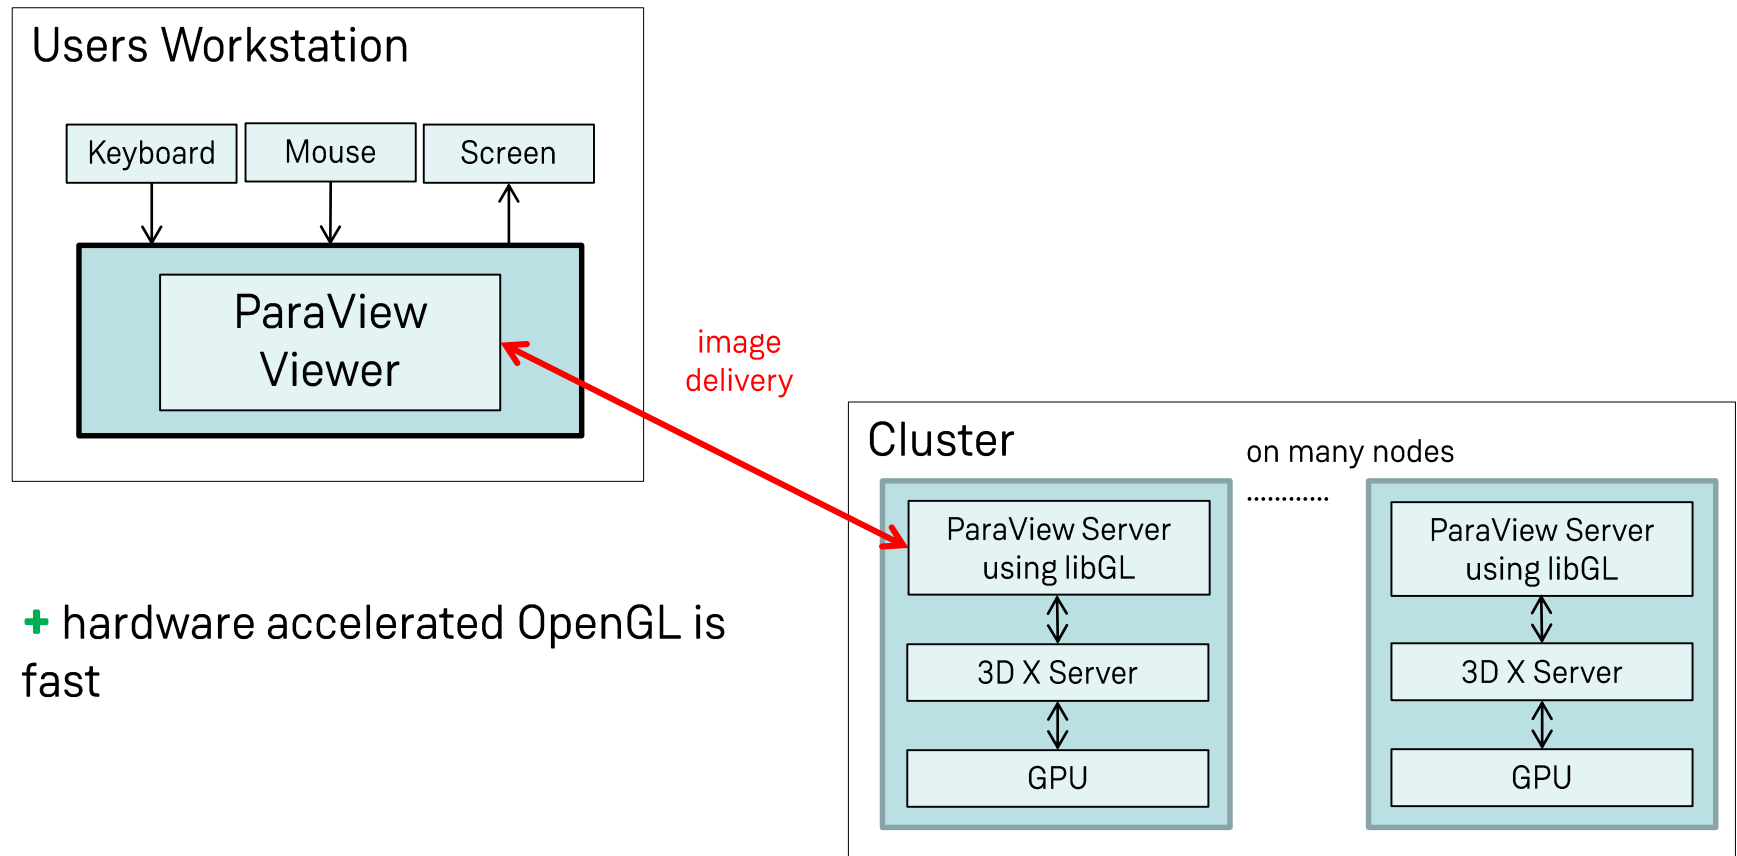

+ hardware accelerated OpenGL is fast

Remote ParaView with X/GPU

PVserver on vis node

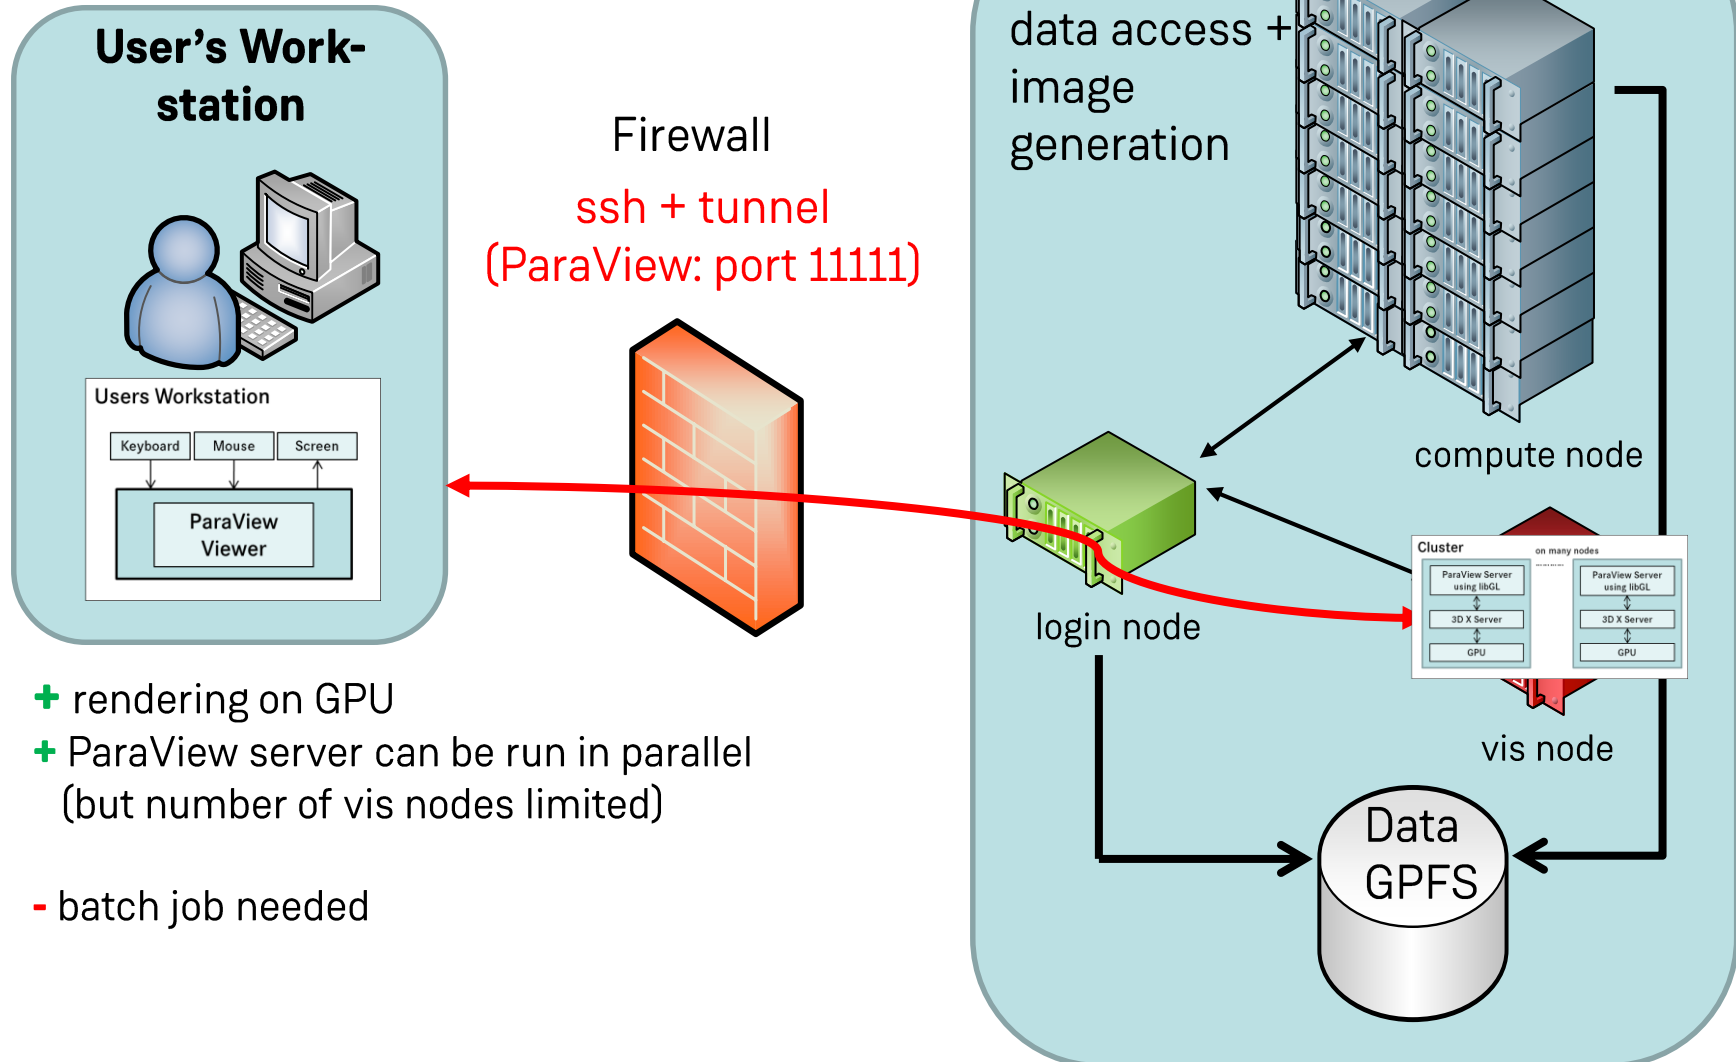

- + rendering on GPU
- + ParaView server can be run in parallel (but number of vis nodes limited)
- batch job needed

VNC (Virtual Network Computing)

- simplifies the access to remote visualization
- provides a complete graphical and remote desktop by
 - transmitting the keyboard and mouse events from your computer to the remote machine
 - relaying the graphical screen updates back in the other direction.
- platform-independent (VNC viewers are available for almost any operating system)
- multiple clients may connect to a VNC server at the same time sharing the same session (support, presentation, group discussions)


VNC software used at the JSC:

TurboVNC (optimized for use with VirtualGL)

For best performance do not use any other VNC viewer!

but ... TurboVNC requires VirtualGL in order to run OpenGL applications


Remote Visualization with VNC

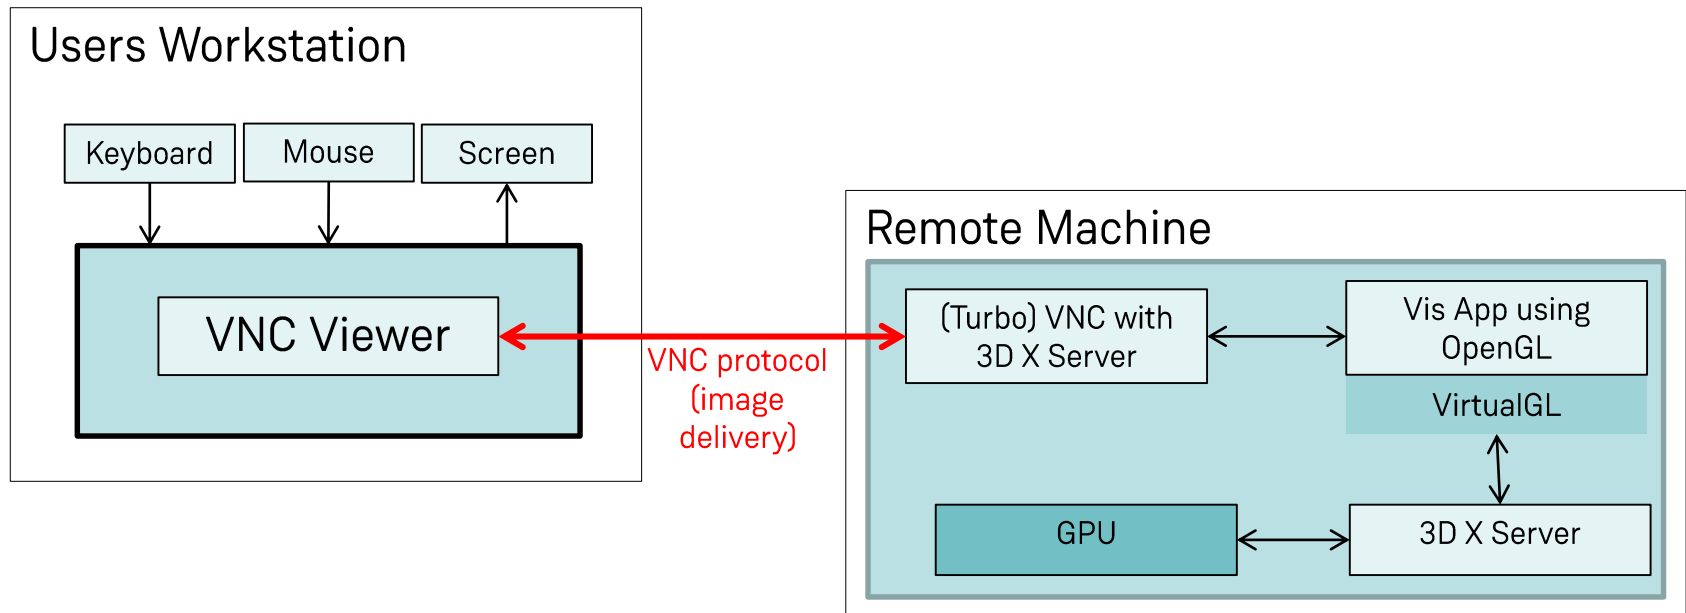

- + easy to use, user only needs to install VNC viewer (not the vis app itself)
- + very convenient, full desktop access on remote machine
- + image delivery is fast
- + hardware accelerated OpenGL is fast

Remote Visualization with VNC


PV viewer on vis login node

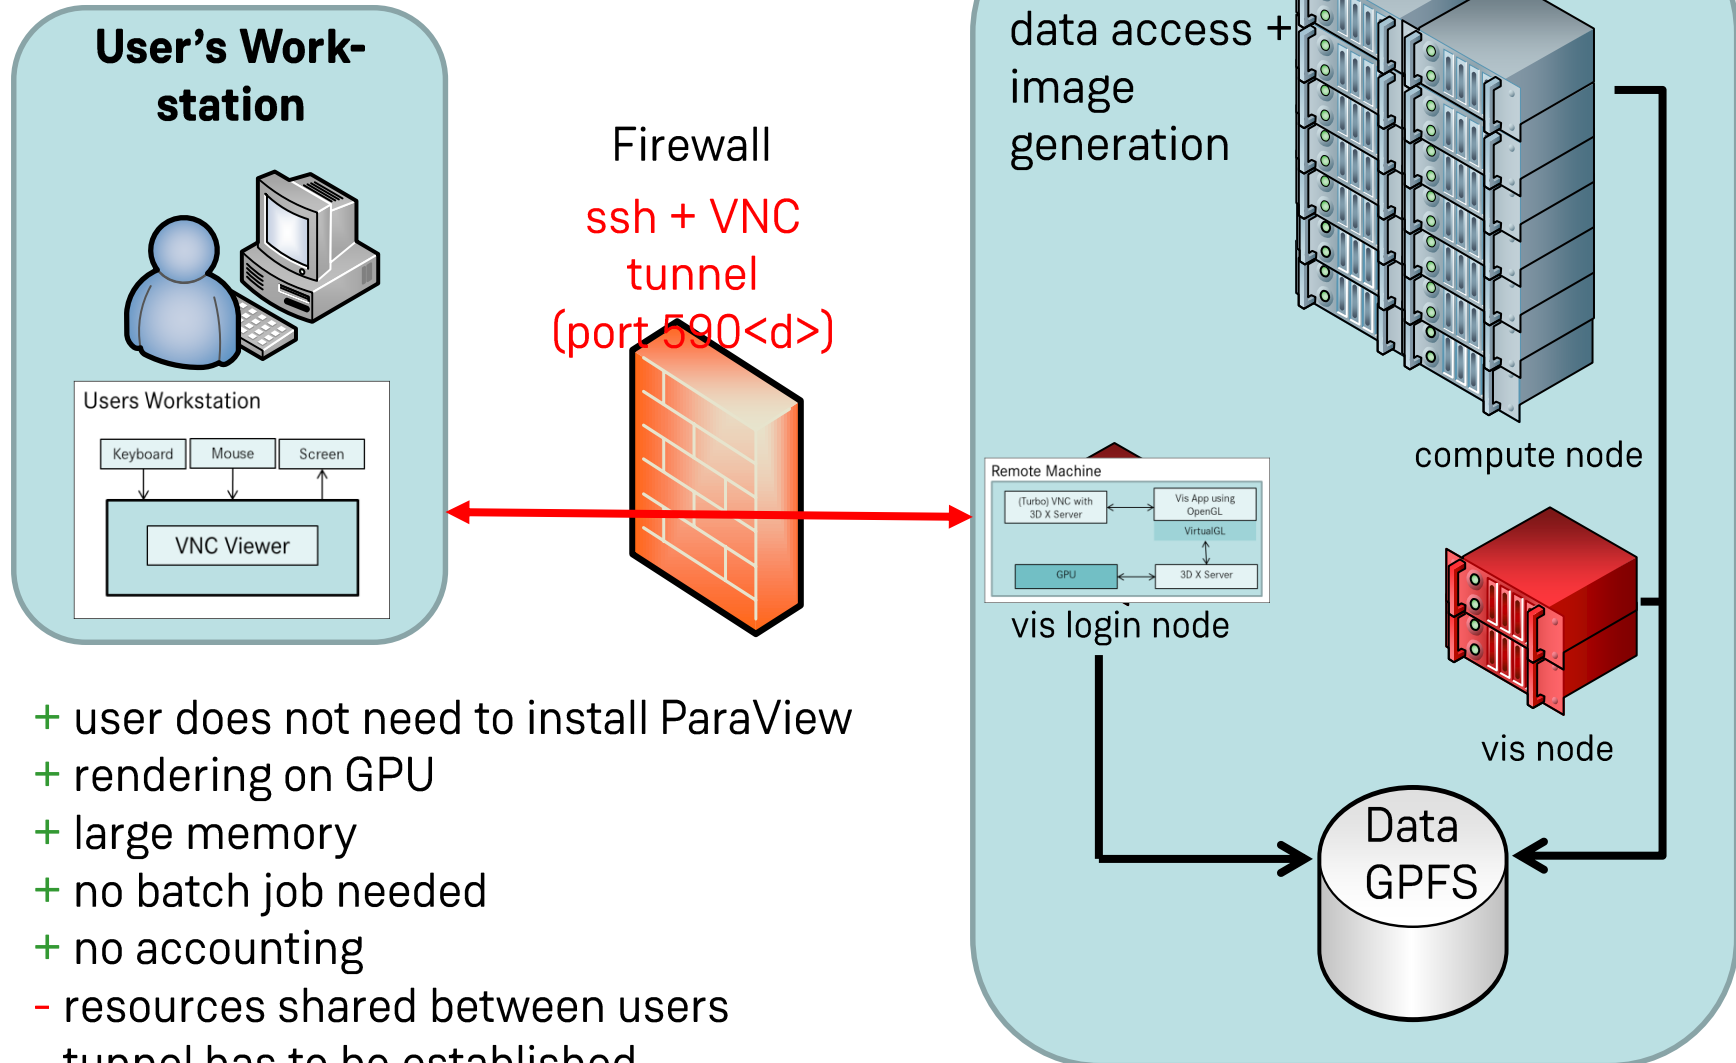

Remote Visualization with VNC

PV viewer on vis login node

PV server on vis node

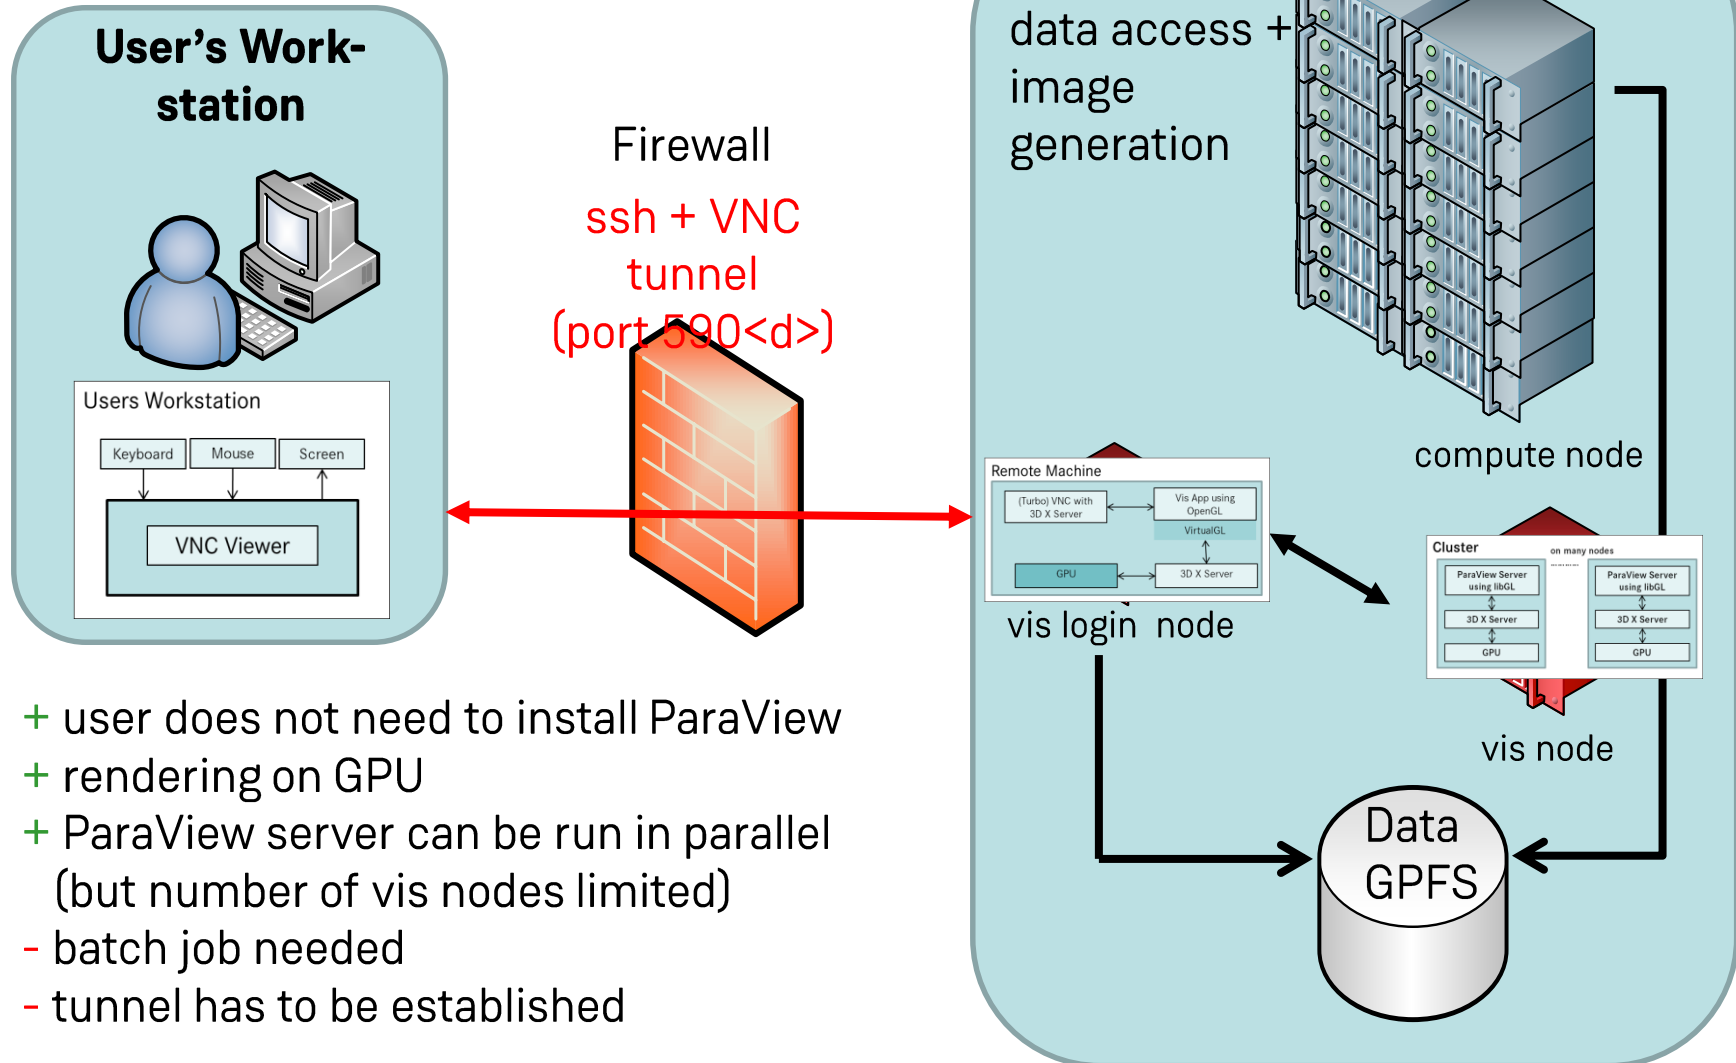


- + user does not need to install ParaView
- + rendering on GPU
- + ParaView server can be run in parallel (but number of vis nodes limited)
- batch job needed
- tunnel has to be established

Remote Visualization with VNC

PV viewer on vis login node

PV server on compute node

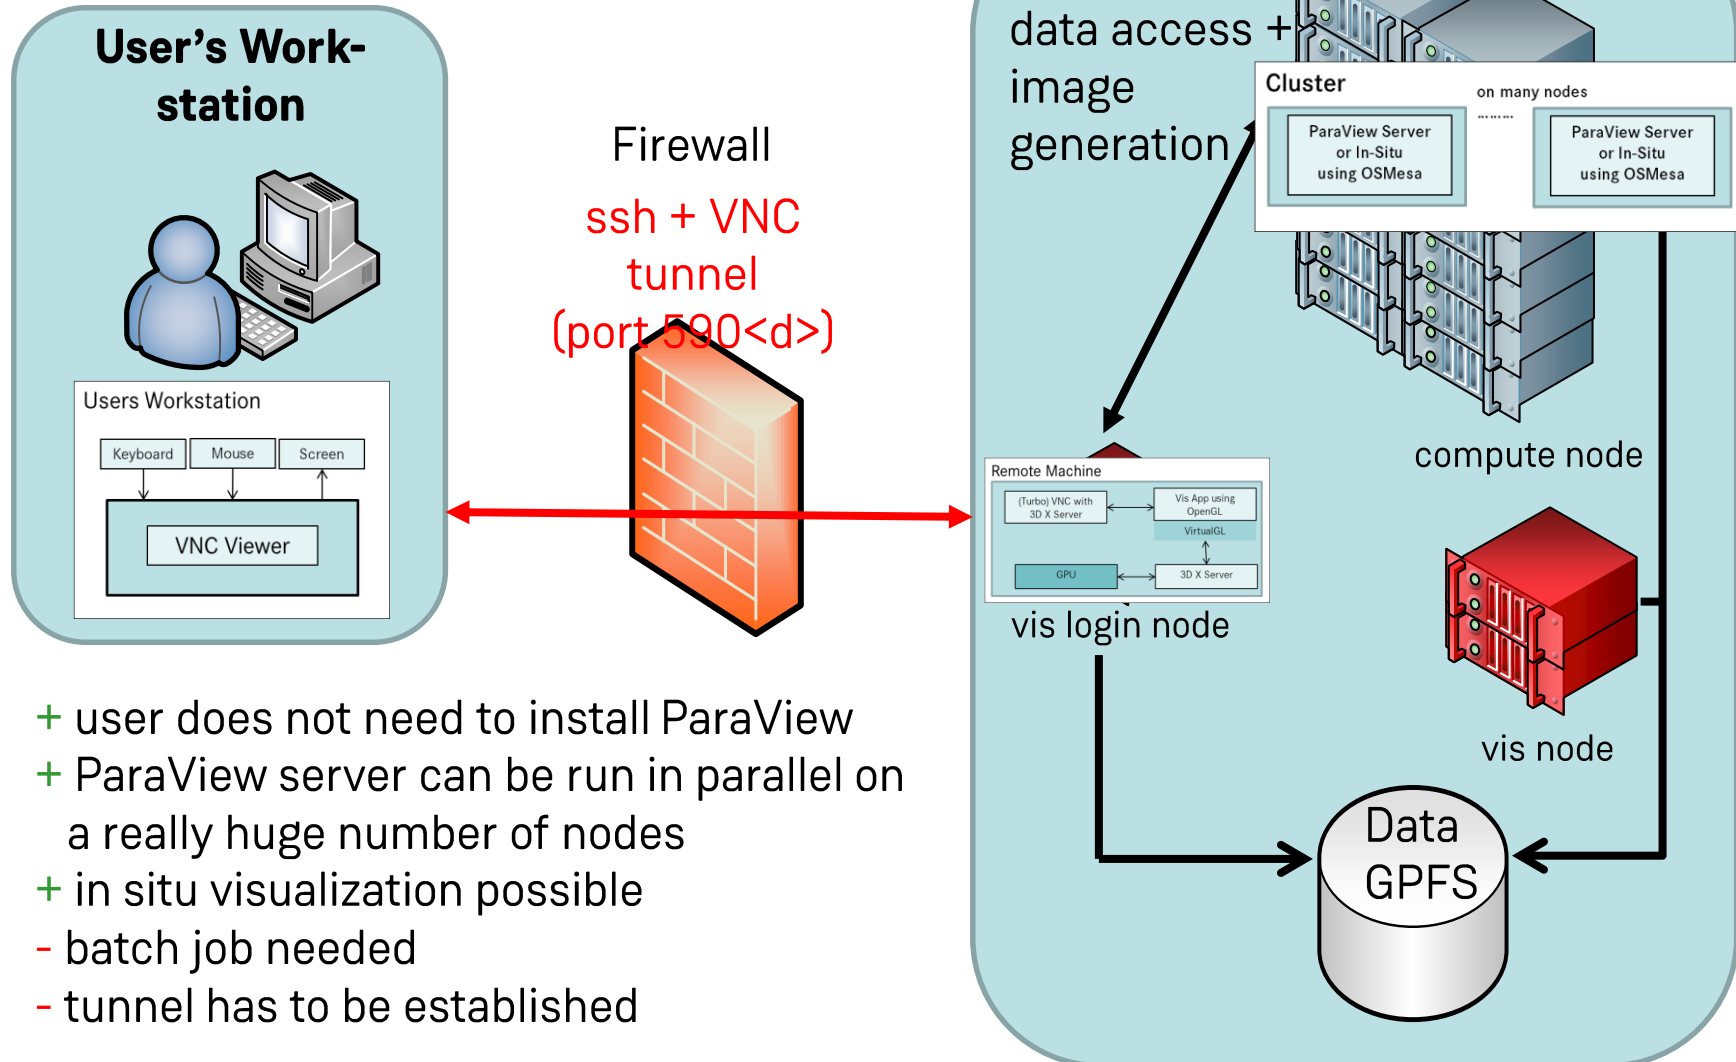

- + user does not need to install ParaView
- + ParaView server can be run in parallel on a really huge number of nodes
- + in situ visualization possible
- batch job needed
- tunnel has to be established


ParaView Python Scripting

Why Python Scripting?

- Can be used when GUI is undesired or unavailable (batch execution)
- Automate repetitive tasks (several similar datasets)
- Leverage ParaView as a scalable parallel post-processing framework

ParaView Python Scripting


- Python scripting available via
 - ParaView client
(Tools -> Python Shell)

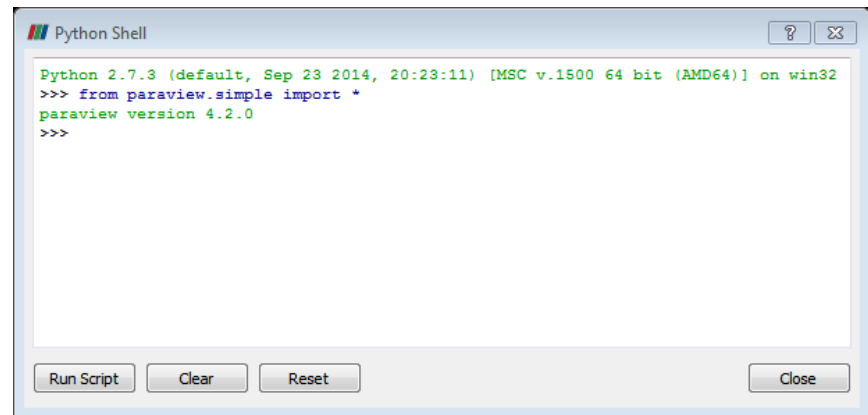

- MPI-enabled batch application (pvbatch)
- Interactive ParaView python client (pvpython)

Building a Python script in the ParaView GUI

- Automated facility for creating Python scripts: **Tracing**
- **Tools -> Start Trace** to begin trace recording,
Tools -> Stop Trace to end it
- Produces a python script that reconstructs the actions taken in the GUI
- In the Script Editor the documented commands can be saved as a Python script or as a macro (see next slide)
- The modification of the Python script can be done here or by any other editor

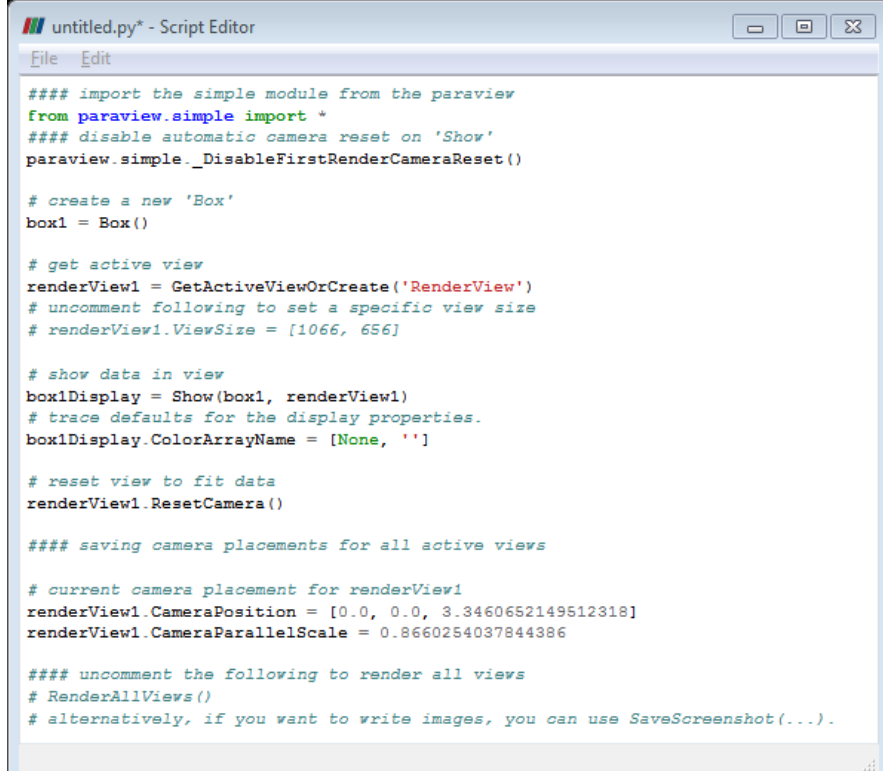

```
untitled.py* - Script Editor
File Edit

### import the simple module from the paraview
from paraview.simple import *
### disable automatic camera reset on 'Show'
paraview.simple._DisableFirstRenderCameraReset()

# create a new 'Box'
box1 = Box()

# get active view
renderView1 = GetActiveViewOrCreate('RenderView')
# uncomment following to set a specific view size
# renderView1.ViewSize = [1066, 656]

# show data in view
box1Display = Show(box1, renderView1)
# trace defaults for the display properties.
box1Display.ColorArrayName = [None, '']

# reset view to fit data
renderView1.ResetCamera()

### saving camera placements for all active views

# current camera placement for renderView1
renderView1.CameraPosition = [0.0, 0.0, 3.3460652149512318]
renderView1.CameraParallelScale = 0.8660254037844386

### uncomment the following to render all views
# RenderAllViews()
# alternatively, if you want to write images, you can use SaveScreenshot(...).
```

Macros


- Macro (=automated script)
- Macros can be invoked from the Menu Button **Macros** or directly inside the toolbar by clicking on it.
- View and customize macros within the Macro Menu:
 - edit, delete existing macros,
 - add new macros (load python scripts from file system)
- Use Macros for:
 - Creating data from scratch
 - Applying filters to existing data (to automate the same visualization on different data)

pvpython and pvbatch

- Command line programs that execute Python scripts
- Feeding scripts from command line or file to the python interpreter
- **pvpython**:
 - serial program
 - equivalent to the GUI-Client, replacing the GUI with the python interpreter
- **pvbatch**:
 - parallel application, can be launched with mpirun
 - runs without user interaction, saves images to disk
 - uses offscreen-rendering

ParaView Python Scripting – basic bindings

- First thing any ParaView Python script must do is load the **paraview.simple** module: `from paraview.simple import *`
- Automatically invoked in the scripting dialog in ParaView (Tools->Python Shell)
- Add it yourself when writing script from scratch
- **paraview.simple** defines a function for every
 - Source
 - Filter
 - Reader
 - Writer defined in ParaView.

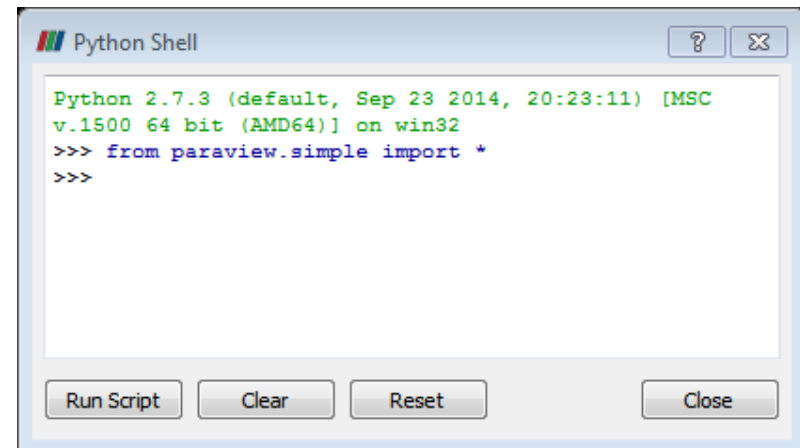

ParaView Python Scripting - functions

- Have the same name as shown in the GUI menus, but spaces and special characters removed:
 - Sphere = Sources->Sphere
 - PlotOverLine = Filters->Data Analysis->Plot Over Line
- Create a pipeline object that shows up in the pipeline browser (except for writers)
- Return an object that can be used to query and manipulate properties
- List of functions available in paraview.simple:
 - `dir(paraview.simple)`
 - `help(paraview.simple)` -> verbose listing
- Example: <https://trac.version.fz-juelich.de/vis/wiki/Examples/Brain>

Python Scripting – Simple Example

Creating and showing a source

```
from paraview.simple import *
```

needs to be invoked at the beginning of any ParaView Python script

```
import os
```

```
os.chdir("path_to_directory")
```

generated Output will be written to the specified path


```
sphere= Sphere()
```

```
Show()
```

```
Render()
```

```
WriteImage("test1.png")
```

create a sphere pipeline object
turn on visibility of this object
cause results to be seen in the view
create an output



Python Scripting – Simple Example

Creating and Showing a Filter

`Hide()`

hides the sphere

`shrink=Shrink()`

adds a Shrink Filter to the sphere

`Show()`

and shows that


`Render()`

Shrink Filter makes all the polygons

`WriteImage("test2.png")`

smaller and give the mesh an

exploded type of appearance

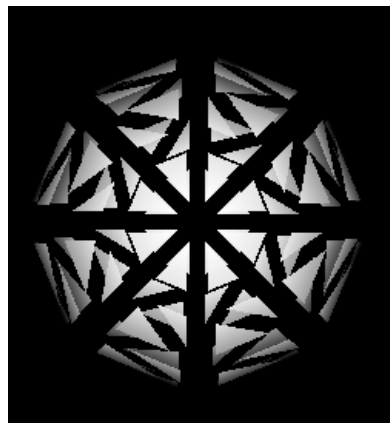

Python Scripting – Simple Example

Changing pipeline object properties


```
help(sphere)
print sphere.ThetaResolution
```

```
sphere.ThetaResolution=16
Render()
WriteImage("test3.png")
```


```
print shrink.ShrinkFactor
shrink.ShrinkFactor=0.25
Render()
WriteImage("test4.png")
```

get a full list of properties
print current value of theta resolution
(=8)

set it to a new value
turn on visibility
create an output

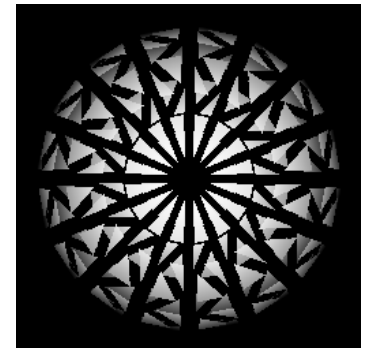

print current ShrinkFactor
set it to a smaller value
turns on visibility
create an output

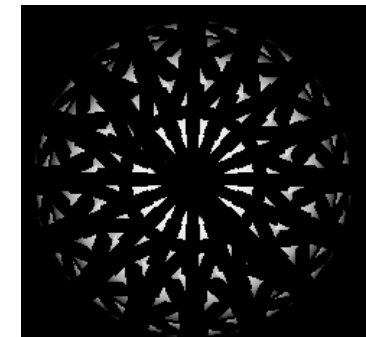


Python Scripting – Simple Example

Branching Pipelines

```
wireframe=ExtractEdges(Input=sphere)  
  
Show()  
Render()  
WriteImage("test5.png")
```

add a second filter to the
sphere source

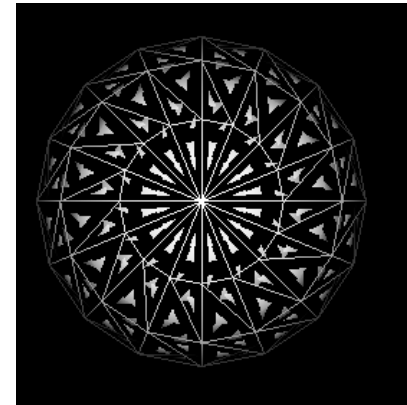


Note: Any action is performed to the active object

- get/set active object via GetActiveSource/SetActiveSource functions
- Set the Input property upon construction of an object to bypass this behavior

Exercise IX: Create a Python Script and run it

- Create a Python script by **tracing** ParaView:
 - Create a Sphere Source with ThetaResolution=20, hit apply
 - Apply the Extract Edges filter to the sphere
 - Save a screenshot
- Test the script as a macro
- Test the script with pvpython
(Note: you have to edit the script and add the “Connect()” command at the beginning)

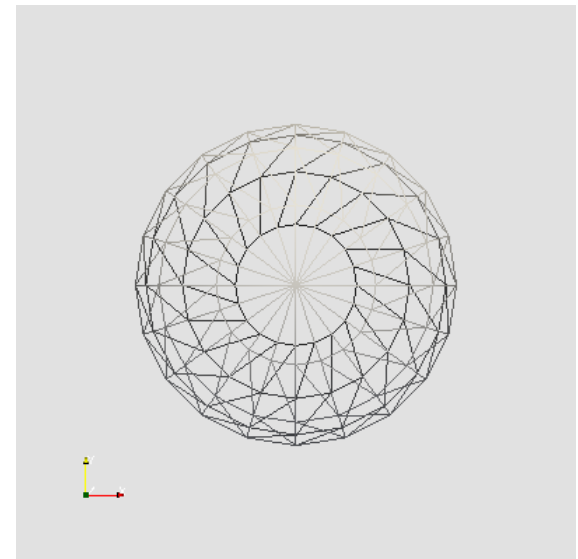

Loading Data with Programmable Source

Example: load csv data.

Input files: .csv (text) files with naming scheme

TOAR_YYYYMMDD_HHMM.csv

Content: latitude, longitude, value, of an unconnected “point cloud” e.g.:

8.3082,	54.9250,	46
12.7253,	54.4367,	42
6.0939,	50.7547,	29
8.5484,	52.0232,	26
6.8746,	51.8620,	32
6.9769,	51.5260,	28
7.4575,	51.5369,	25
.	.	.

Loading Data with Programmable Source

Request Information Script:

```
def setOutputTimesteps(algorithm, timesteps):  
    """helper routine to set timestep information"""  
    executive= algorithm.GetExecutive()  
    outInfo = executive.GetOutputInformation(0)  
  
    outInfo.Remove(executive.TIME_STEPS())  
    for timestep in timesteps:  
        outInfo.Append(executive.TIME_STEPS(), timestep)  
  
    outInfo.Remove(executive.TIME_RANGE())  
    outInfo.Append(executive.TIME_RANGE(), timesteps[0])  
    outInfo.Append(executive.TIME_RANGE(), timesteps[-1])
```

Loading Data with Programmable Source

Request Information Script (continued)

```
def getFileList(fpath, fprefix, fpostfix):
    """get all files"""
    import os
    files=[]
    for i in os.listdir(fpath):
        if os.path.isfile(os.path.join(fpath,i)) \
            and fprefix in i \
            and fpostfix in i:
            files.append(i)
    files.sort()
    return files

def getTimeTuple(fname, fprefix, fpostfix):
    """get timetuple from file name"""

    import time
    import datetime

    ftime_str = fname[len(fprefix):-len(fpostfix)]
    ftimetuple =
    time.mktime(datetime.datetime.strptime(ftime_str,"%Y%m%d_%H%M").timetuple())

    return ftimetuple
```

Loading Data with Programmable Source

Request Information Script (continued)

```
def getTimestepsFromFiles(files, fprefix, fpostfix):  
    """generate timestep from filename"""  
    ref_fctime = 0.0  
    ftime_sec = []  
    for i, fname in enumerate(files):  
        cur_fctime = getTimeTuple(fname, fprefix, fpostfix)  
        if i == 0:  
            ref_fctime = cur_fctime  
        ftime_sec.append(cur_fctime - ref_fctime)  
    ftime_h = [ x / 3600 for x in ftime_sec ]  
    ftime_h_int = [int(i) for i in ftime_h]  
    return ftime_h_int
```

Loading Data with Programmable Source

Request Information Script (continued)

```
# get all files
fpath="/data/30-Projekte/2018-03-
    12_TagDerWissenschaft/m.schultz/"
fprefix="TOAR_"
fpostfix=".csv"
files = getFileList(fpath, fprefix, fpostfix)

timestamps = getTimestepsFromFiles(files, fprefix, fpostfix)

# get time-steps
setOutputTimesteps(self, timestamps)
```

Loading Data with Programmable Source

Main Script

```
def GetUpdateTimestep(algorithm):  
    """Returns the requested time value, or None if not  
    present."""  
    executive = algorithm.GetExecutive()  
    outInfo = executive.GetOutputInformation(0)  
    return outInfo.Get(executive.UPDATE_TIME_STEP()) \  
        if outInfo.Has(executive.UPDATE_TIME_STEP()) else  
    None  
  
*** getFileList, getTimeTup, getTimestepsFromFiles as above
```

Loading Data with Programmable Source

Main Script (continued)

```
def getFileFromTimestep(tstep, fpath, fprefix, fpostfix):  
    """generate filename for time-step"""  
    import time  
    import datetime  
    files = getFileList(fpath, fprefix, fpostfix)  
    timestamps = getTimestepsFromFiles(files, fprefix, fpostfix)  
    # get a tstep, which we have data for  
    ret_tstep = min(timestamps, key=lambda x:abs(x-tstep))  
    # get date-string from tstep  
    refftime = getTimeTuple(files[0], fprefix, fpostfix)  
    ftimetuple = time.localtime(refftime + ret_tstep*3600)  
    tstr = time.strftime("%Y%m%d_%H%M", ftimetuple)  
    # create filename  
    ret_fname = fpath + fprefix + tstr + fpostfix  
  
    return ret_tstep, ret_fname
```

Loading Data with Programmable Source

Main Script (continued)

```
def readCSVFile(fname, output):
    import math
    import csv
    import vtk
    newPts = vtk.vtkPoints()
    valArray = vtk.vtkDoubleArray()
    valArray.SetName('Ozone')
    valArray.SetNumberOfComponents(1)
    # fill VTK objects
    with open(fname) as csvfile:
        csvReader = csv.reader(csvfile, delimiter=',')
        numPts = sum(1 for row in csvReader)
        i = 0
        csvfile.seek(0)
        for row in csvReader:
            # read row
            # longitude, latitude, (ozone) value [letzterer in nmol mol-
1]
```

Loading Data with Programmable Source

Main Script (continued)

```
lon = float(row[0])
lat  = float(row[1])
val  = float(row[2])
# convert longitude,latitude,altitude to x,y,z
# spherical coordinates to cartesian coordinates on a unit
sphere (radius=1)
radTmp = math.cos(lat);
z = math.sin(lat);
x = math.cos(lon +1.5*math.pi) *radTmp;
y = math.sin(lon +1.5*math.pi) *radTmp;

i = i+1
newPts.InsertPoint(i-1, x,y,z)
valArray.InsertValue(i-1, val)

output.SetPoints(newPts)
output.GetPointData().AddArray(valArray)
```

Loading Data with Programmable Source

Main Script (continued)

```
# req_time is the requested time-step.
# This may not be exactly equal to the time-step published in
  RequestInformation() (the code must handle that)
req_time = GetUpdateTimestep(self)

# Use req_time to determine which CSV file to read
fpath="/data/30-Projekte/2018-03-12_TagDerWissenschaft/m.schultz/"
fprefix="TOAR_"
fpostfix=".csv"
ret_time, ret_fname = getFileFromTimestep(req_time, fpath, fprefix,
  fpostfix)

# read CSV file
#pdo = self.GetPolyDataOutput()
readCSVFile(ret_fname, output)

# Mark the time-step produced
output.GetInformation().Set(output.DATA_TIME_STEP(), ret_time)
```

ParaView Plugins - Introduction


- ParaView comes with a large range of readers, filters and views providing a large range of functionality
- ParaView provides an extensive plugin mechanism which enables the user to
 - add new **readers**, writers and **filters**
 - add custom GUI components such as toolbar buttons to perform common tasks
 - add new views for displaying data
- The following slides cover
 - how to use existing plugins
 - how to write new plugins for ParaView.

Using ParaView Plugins

- Plugins are distributed as shared libraries (*.so on Unix, *.dylib on Mac, *.dll on Windows)
- Plugin must be built with the same version of ParaView
- ParaView has to be built with shared libs enabled
- three ways for loading plugins:
 - using environment variable PV_PLUGIN_PATH (Auto-loading plugins)
 - placing the plugins in a recognized location:
 - “plugins” subdirectory beneath the directory containing the paraview client or server executables
 - “plugins” subdirectory in the user's home area.
\$HOME/.config/ParaView/ParaView<version>/Plugins on
Unix/Linux/Mac
%APPDATA%\ParaView\ParaView<version>\Plugins on
Windows
 - using the GUI

Loading ParaView Plugins Using the GUI

- Plugin manager accessible from Tools | Manage Plugins menu:

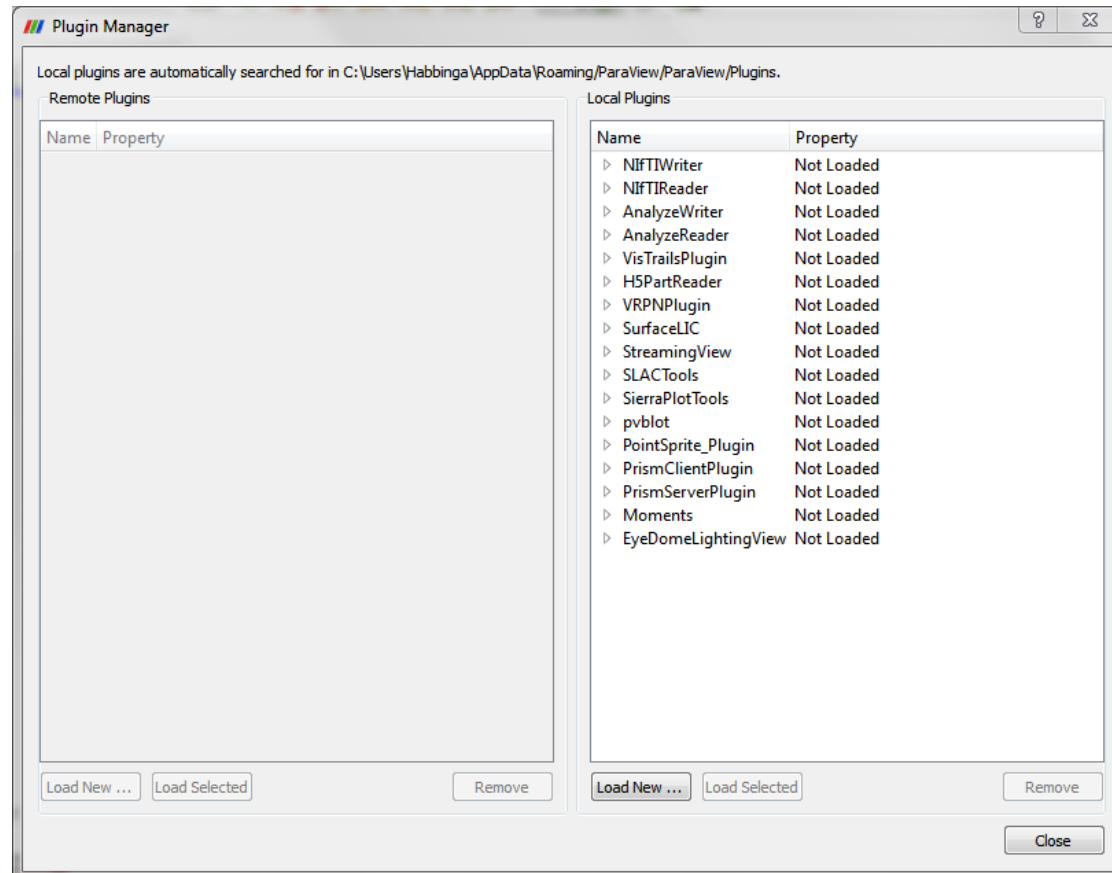

Writing ParaView Plugins – Server Manager Configuration

- ParaView uses the VTK Server Manager for building distributed client-server applications by means of the Proxy design pattern
- Proxies are defined in the **Server Manager Configuration XML**
- Proxies are organized in **ProxyGroups**
 - Examples: sources, filters, views, ...
- Each **Proxy** stores a reference to the corresponding VTK object located on the server
 - Examples: SourceProxy, ViewProxy, ...
- The Proxy contains **Properties** to describe the part of the interface which is exposed to the client (function name and arguments)
 - Examples: IntVectorProperty, StringVectorProperty, InputProperty, ...
- The range of values of a property can be restricted by **Domains**
 - Examples: IntRangeDomain, FileListDomain, DataTypeDomain, ProxyGroupDomain,...

Enabling existing VTK-Classes as Plugins

- To enable an existing VTK-class, write a Server Manager configuration xml-file and load it into the ParaView GUI
- example: enable the VTK-filter **vtkCellDerivatives**, write CellDerivatives.xml as follows

```
<?xml version="1.0"?>
<ServerManagerConfiguration>
  <ProxyGroup name="filters">
    <SourceProxy name="MyCellDerivatives" class="vtkCellDerivatives" label="My Cell Derivatives">
      <Documentation
        long_help="Create point attribute array by projecting points onto an elevation vector."
        short_help="Create a point array representing elevation.">
      </Documentation>
      <InputProperty
        name="Input"
        command="SetInputConnection">
        <ProxyGroupDomain name="groups">
          <Group name="sources"/>
          <Group name="filters"/>
        </ProxyGroupDomain>
        <DataTypeDomain name="input_type">
          <DataType value="vtkDataSet"/>
        </DataTypeDomain>
      </InputProperty>
    </SourceProxy>
  </ProxyGroup>
</ServerManagerConfiguration>
```

Writing New ParaView Plugins – Source Code

- Compiling plugins requires own build of ParaView since binaries downloaded from www.paraview.org do not include necessary header files
- Example: simple reader called **vtkCSVImageReader** (example taken from <http://www.kitware.com/products/html/WritingAParaViewReaderPlugin.html>)
 - read a 2D image from a text file with simple delimited format
 - allow someone to export simple matrices of data from Excel and visualize them as heat maps or height fields in ParaView
 - assume the files consist of strictly numeric values separated by commas or some other delimiter
 - use a `vtkDelimitedTextReader` instance which will read delimited text into a `vtkTable`
 - methods to set and get the file name and field delimiter characters, which are delegated to the `vtkDelimitedTextReader` instance variable

Writing New ParaView Plugins

- Writing a new plugin requires generating the following files:
 - .cxx and .h files (the actual plugin source code)
 - Server manager configuration (xml-file)
 - configuration xml for the GUI (optional for filters)
 - CMakeLists.txt for compiling your source code into a shared library
- Hint: try to find similar plugin in the ParaView sourcecode (src/Plugins, src\Examples\Plugins)
- Use this code as a starting point

Writing New ParaView Plugins – Source Code

- Step 1: override the following methods of the chosen vtk superclass to make it operate properly in a standard vtk pipeline:
 - tell the VTK pipeline information about the data before creating the output, e.g. extent, spacing and origin in case of `vtkImageData`

```
int vtkCSVImageReader::RequestInformation( vtkInformation *request,
                                           vtkInformationVector **inputVector,
                                           vtkInformationVector *outputVector)
```

- read data from the file and store it in the corresponding data object in the output port

```
int vtkCSVImageReader::RequestData( vtkInformation *request,
                                    vtkInformationVector **inputVector,
                                    vtkInformationVector *outputVector );
```

- Step 2: override other methods, e.g. **SetFileName**(const char* fname), **SetFieldDelimiterCharacters**(const char* delim), ...

Class vtkCSVImageReader

```
class vtkCSVImageReader : public vtkImageAlgorithm
{
public:
    static vtkCSVImageReader* New();
    vtkTypeRevisionMacro(vtkCSVImageReader,vtkImageAlgorithm);
    void PrintSelf(ostream& os, vtkIndent indent);
    virtual void SetFileName(const char* fname);
    virtual const char* GetFileName();
    virtual void SetFieldDelimiterCharacters(const char* delim);
    virtual const char* GetFieldDelimiterCharacters();
protected:
    vtkCSVImageReader();
    ~vtkCSVImageReader();

    int RequestInformation(vtkInformation*, vtkInformationVector**,
        vtkInformationVector*);
    int RequestData(vtkInformation*, vtkInformationVector**, vtkInformationVector*);
    vtkDelimitedTextReader* Reader;

private:
    vtkCSVImageReader(const vtkCSVImageReader&);
    void operator=(const vtkCSVImageReader&); };
```

RequestInformation(...)

```
int vtkCSVImageReader::RequestInformation (vtkInformation*, vtkInformationVector**,
    vtkInformationVector* outputVector)
{
    vtkInformation* outInfo = outputVector->GetInformationObject(0);
    this->Reader->Update();
    vtkTable* output = this->Reader->GetOutput();
    vtkIdType rows = output->GetNumberOfRows();
    vtkIdType columns = output->GetNumberOfColumns();

    int ext[6] = {0, rows, 0, columns, 0, 0};
    double spacing[3] = {1, 1, 1};
    double origin[3] = {0, 0, 0};

    outInfo->Set(vtkStreamingDemandDrivenPipeline::WHOLE_EXTENT(), ext, 6);
    outInfo->Set(vtkDataObject::SPACING(), spacing, 3);
    outInfo->Set(vtkDataObject::ORIGIN(), origin, 3);
    vtkDataObject::SetPointDataActiveScalarInfo(outInfo, VTK_FLOAT, 1);
    return 1;
}
```

RequestData(...)

```
int vtkCSVImageReader::RequestData(vtkInformation*, vtkInformationVector**,  
    vtkInformationVector* outputVector)  
{  
    vtkImageData* image = vtkImageData::GetData(outputVector);  
    vtkTable* output = this->Reader->GetOutput();  
    vtkIdType rows = output->GetNumberOfRows();  
    vtkIdType columns = output->GetNumberOfColumns();  
    image->SetDimensions(rows, columns, 1);  
    image->AllocateScalars();  
    vtkDataArray* scalars = image->GetPointData()->GetScalars();  
    scalars->SetName("Data");  
    for (vtkIdType r = 0; r < rows; ++r)  
    {  
        for (vtkIdType c = 0; c < columns; ++c)  
        {  
            vtkVariant val = output->GetValue(r, c);  
            float f = val.ToFloat();  
            scalars->SetTuple1(c*rows + r, f);  
        }  
    }  
    return 1;  
}
```

Writing New ParaView Plugins - Server Manager Configuration

- Server Manager Configuration for the example CSVImageReader:

```
<?xml version="1.0"?>
  <ServerManagerConfiguration>
    <!-- Begin CSVImageReader -->
    <ProxyGroup name="sources">
      <SourceProxy name="CSVImageReader"
        class="vtkCSVImageReader">
        <StringVectorProperty name="FileName"
          number_of_elements="1"
          command="SetFileName">
          <FileListDomain name="files"/>
        </StringVectorProperty>
        <StringVectorProperty
          name="FieldDelimiterCharacters"
          command="SetFieldDelimiterCharacters"
          number_of_elements="1"
          default_values=","/>
        </SourceProxy>
      </ProxyGroup>
    <!-- End CSVImageReader -->
  </ServerManagerConfiguration>
```

Writing New ParaView Plugins – Configuration XML for the GUI

- Provides the higher-level information about where new elements will be placed in the user interface.
- Example: CSVImageReaderGUI.xml

```
<?xml version="1.0"?>
<ParaViewReaders>
  <Reader
    name=„CSVImageReader“
    extensions=„csvimg“
    file_description=„csv Image data“>
  </Reader>
</ParaViewReaders>
```

- tells ParaView to create GUI elements for “CSVImageReader”
- creates a new entry in the File Open dialog for CSV image data files
- associates files ending in “.csvimg” with the new reader

Writing ParaView plugins – CMakeLists.txt

- Use cmake to build the ParaView plugin
- CMakeLists.txt file ties sources and xml files together

```
CMAKE_MINIMUM_REQUIRED(VERSION 2.6)
PROJECT(CSVImageReader)

FIND_PACKAGE(ParaView REQUIRED)
INCLUDE(${PARAVIEW_USE_FILE})

ADD_PARAVIEW_PLUGIN(CSVImageReader "1.0"
    SERVER_MANAGER_XML CSVImageReader.xml
    SERVER_MANAGER_SOURCES vtkCSVImageReader.cxx
    GUI_RESOURCE_FILES CSVImageReaderGUI.xml)
```





- locate ParaView with FIND_PACKAGE
- import the CMake configuration parameters from ParaView by including PARAVIEW_USE_FILE.
- ADD_PARAVIEW_PLUGIN specify all the information needed to build the plugin.

**Thank you for your
attention!**

Documentation

- The Paraview User's Guide
- The Visualization Toolkit
- The VTK Guide
- Mastering Cmake

All are published by Kitware, Inc.

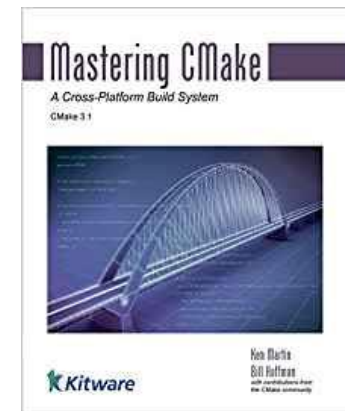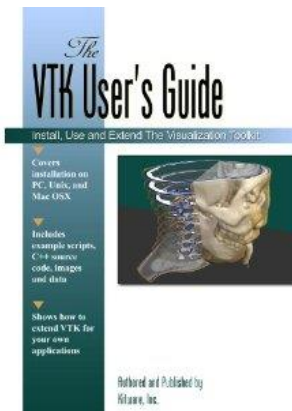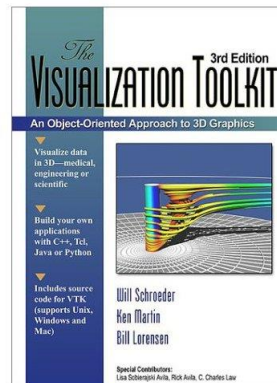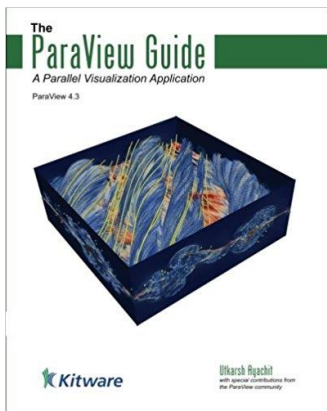

ParaView Guide (Community Edition), Getting Started and Tutorial (pdf) are included in ParaView download

ParaView Links

ParaView Homepage: <http://www.paraview.org>

ParaView Wiki: <http://www.paraview.org/Wiki/ParaView>

- Importing Data
- Extending Paraview
- ParaView Server Setup
- Tutorials

Mailing List: <https://www.paraview.org/mailling-lists/>

Searching the ParaView Mailing List: <https://paraview.markmail.org/>