

Chemical instability in the surface layer of the lead hafnate single crystal

J. Piecha^{1,*}, C. Rodenbücher^{2,3}, J. Friedrich³, H. Hartmann⁴, A. Majchrowski⁵, K. Szot^{1,3} and K. Roleder¹

¹Institute of Physics, University of Silesia, ul. 75 Pułku Piechoty 1, Chorzów, Poland

²Institute of Energy and Climate Research (IEK-3), Forschungszentrum Jülich GmbH, 52425 Jülich, Germany

³Peter Grünberg Institut (PGI-7), Forschungszentrum Jülich GmbH, 52425 Jülich, Germany


⁴Central Institute for Engineering, Electronics and Analytics (ZEA-3), Forschungszentrum Jülich GmbH, 52425 Jülich, Germany

⁵Institute of Applied Physics, Military University of Technology, ul. Gen. W. Urbanowicza, Warszawa, Poland

*Corresponding Author: julita.piecha@us.edu.pl

Lead hafnate PbHfO_3 , as lead zirconate PbZrO_3 , is an antiferroelectric perovskite oxide, which is a promising material for electric energy storage in high power applications. In order to elucidate the basic properties of this material the crystallographic and optical properties [1], lattice dynamics [2] and dielectric properties [3] have been investigated in a wide temperature range for single PbHfO_3 crystals. All of those investigations were conducted on crystals grown by means of spontaneous crystallization from the high-temperature solution in $\text{Pb}_3\text{O}_4\text{--B}_2\text{O}_3$ solvent [3].

We will present studies on the modifications of the surface layer of the lead hafnate crystals after exposition to various external conditions, such as high temperatures, oxidation and reduction processes. The thermogravimetric measurement method was used to define the stability of the crystal during oxidation at 600 °C and reduction at 500 °C. X-ray photoelectron spectroscopy was used to verify the modification in the electronic states after heating from room temperature to 700 °C, with a 100 °C step. Energy-dispersive x-ray analysis with a scanning electron microscope was used to identify topography and chemical composition of the surface layer after redox reactions. Figure 1 presents an electron microscopy image of the crystal after the reduction process. It shows areas with lead-deficiency (Spectrum A) and lead-rich exsolutions agglomerated with a bubbles-shaped structures (Spectrum B).

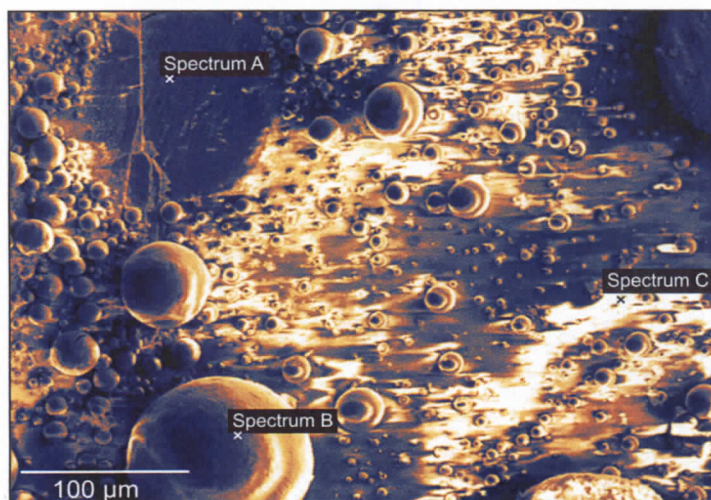

Area	Atomic concentration [%]		
	Pb	Hf	O
Average	15.5	18.4	66.1
Spectrum A	5.0	30.9	64.1
Spectrum B	40.0	0.7	59.3
Spectrum C	5.9	26.7	67.4

Figure 1. SEM-EDX measurement of surface of lead hafnate single crystal after reduction.

References

- [1] S. Huband et al., *J. Appl. Cryst.*, 50, 378–384 (2017)
- [2] R.G. Burkovsky et al., *J. Phys.: Condens. Matter*, 27, 335901 (2015)
- [3] A. Bussmann-Holder et al., *J. Phys.: Condens. Matter*, 27, 105901 (2015)