

# A NEW APPROACH: LYSO BASED POLARIMETRY FOR THE EDM MEASUREMENTS

*Speaker: I. Keshelashvili*

*CALOR 2018 — University of Oregon, Eugene*

## OUTLINE

- Mission of **Polarimetry**

- challenges for srEDM case

- **COSY Accelerator Facility**

- Spin gymnastic & operating polarimeters

- **New Polarimeter Concept**

- dedicated polarimeter for srEDM experiment

- **Experimental Results**


- 4 beam time since CALOR 2016

- **Summary**

# ELECTRIC DIPOLE MOMENT of the elementary particles

In the SM, the **CP** violation originates from the complex phase in the Cabibbo-Kobayashi-Maskawa (**CKM**) matrix,  
*which couples the quarks' weak and the mass eigenstates, and the  $\theta$  term in the QCD Lagrangian.*

**CP** ( $K^0$  decays) violation means **T** is also violated assuming **CPT** symmetry.  
The existence of a non-zero EDM is a violation of P and T simultaneously & the search for a EDM is a search for **CP** violation and a search for **direct T** symmetry violation.

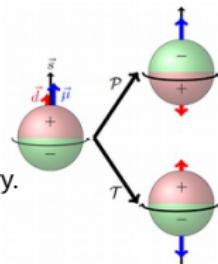


**SM CP** violation is enough to explain what has been observed in the  $K$  &  $B$  meson systems  
but orders of magnitude smaller than observed in the universe

$$\eta = \frac{N_B - N_{\bar{B}}}{N_\gamma} = \sim 10^{-18} (\text{SCM}) \sim 6 \cdot 10^{-10} (\text{BAU})$$

1967: Sacharov conditions for the Baryon Asymmetry of the Universe


- 1) At least one  $N_B$  violating process.
- 2) **C** and **CP** violation
- 3) Interactions outside of thermal equilibrium.

Measurement of the non zero EDM  $\rightarrow$  physics beyond SM

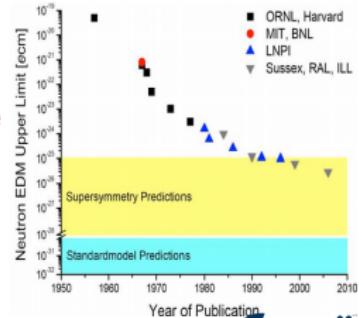

## STORAGE RING – EDM


method differs strongly from nEDM



For all **EDM** experiments  
Interaction of  $d$  with  $E$   
is necessary!

$$\frac{d\vec{s}}{dt} \propto \vec{d} \cdot \vec{E} \times \vec{s}$$

- a) Store longitudinally polarized **protons**
- b) Interact with a radial E-field
- c) Analyze Polarization Build-up (this talk)

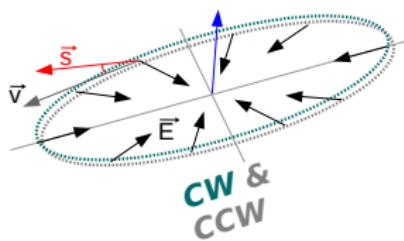

**build-up of vertical  
polarization**

$$\vec{s}_\perp \propto |\vec{d}|$$


## GENERAL FORMALISM

$$PA_y(\theta) = \frac{\sigma^L(\theta) - \sigma^R(\theta)}{\sigma^L(\theta) + \sigma^R(\theta)} \approx \frac{N^L(\theta) - N^R(\theta)}{N^L(\theta) + N^R(\theta)} - \text{between } -1 : 1$$

$$\sigma^{\text{pol}}(\theta, \phi) = \sigma_0(\theta)[1 + \frac{3}{2}PA_y(\theta)\cos\phi + \{\frac{1}{3}\sum P_{ii}A_{ii}\}]$$

$$CR(\theta) = \frac{\sqrt{N^{L\uparrow}N^{R\downarrow}} - \sqrt{N^{R\uparrow}N^{L\downarrow}}}{\sqrt{N^{L\uparrow}N^{R\downarrow}} + \sqrt{N^{R\uparrow}N^{L\downarrow}}} \approx PA_y - \text{known } A_y : \text{calculate } P$$

$$FOM(\theta) = \sigma A_y^2 - \text{max. } FOM : \text{monitor } \frac{d\vec{s}}{dt}$$

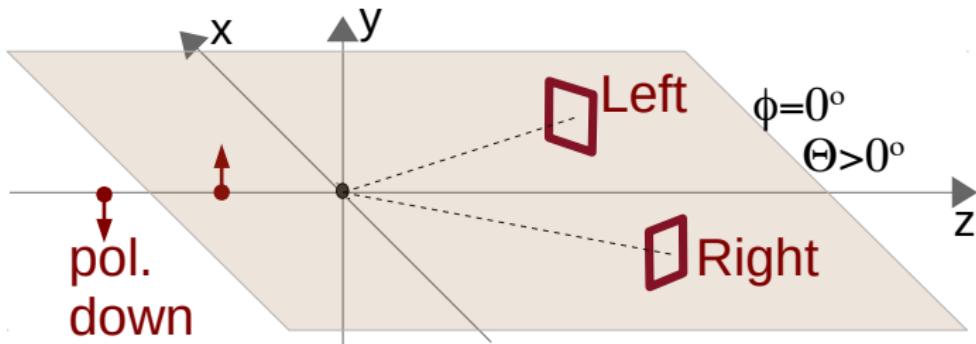


# POLARIMETER SETUP @ COSY



Internal and **external** beams

High polarization (*p, d*)

**Spin manipulation !!!**

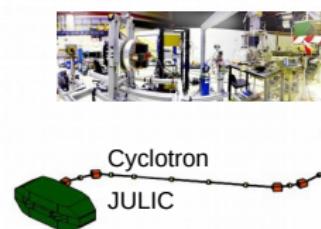

Energy range (min.-- max.):

**0.045 – 2.8 GeV (p)**


**0.023 – 2.3 GeV (d)**

Max. momentum  $\sim 3.7 \text{ GeV}/c$

*Electron & Stochastic* cooling


**Feed-forward** machine

RF ExB Wien filter

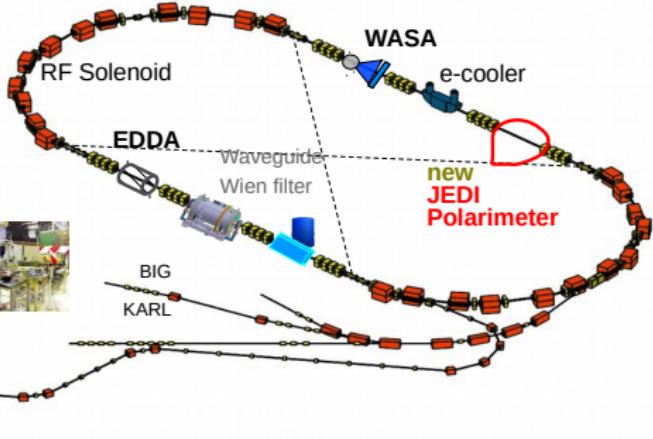



# INTERNAL POLARIMETER

## Prototype of the Calorimeter Part




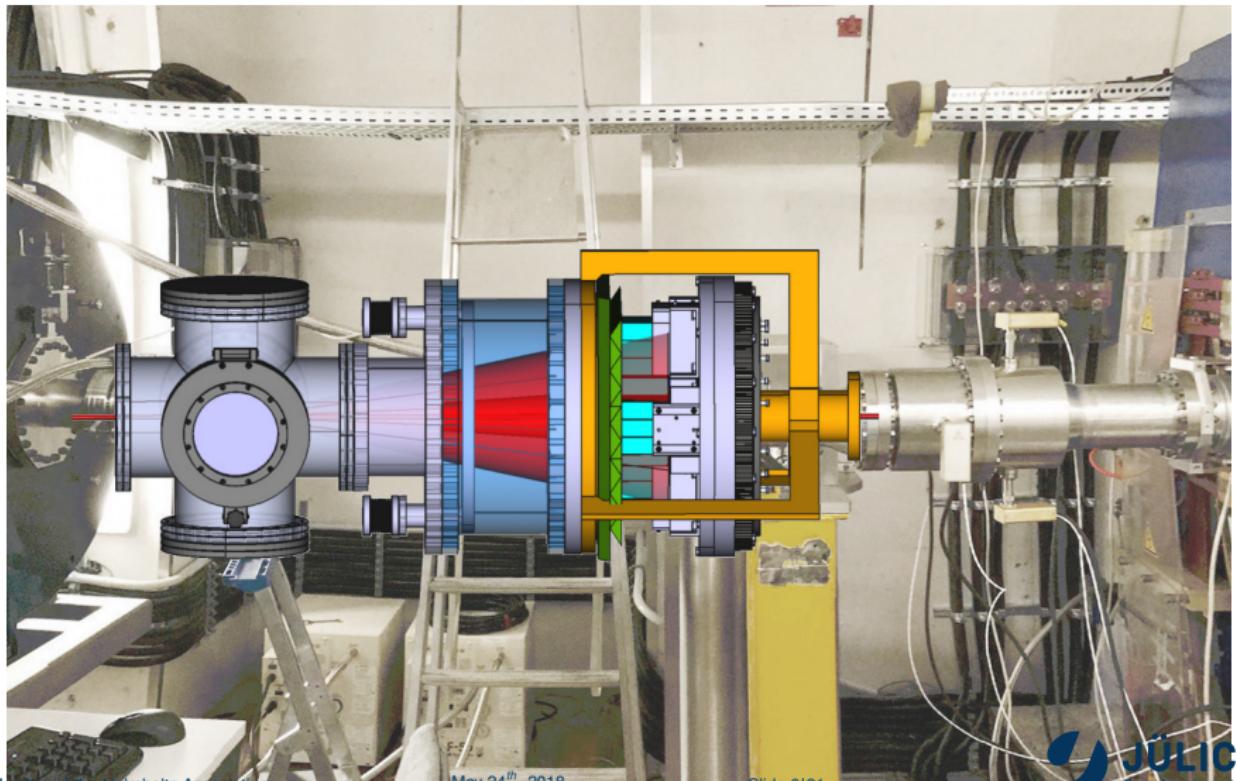


## NEW SETUP


### Test setup for polarimeter

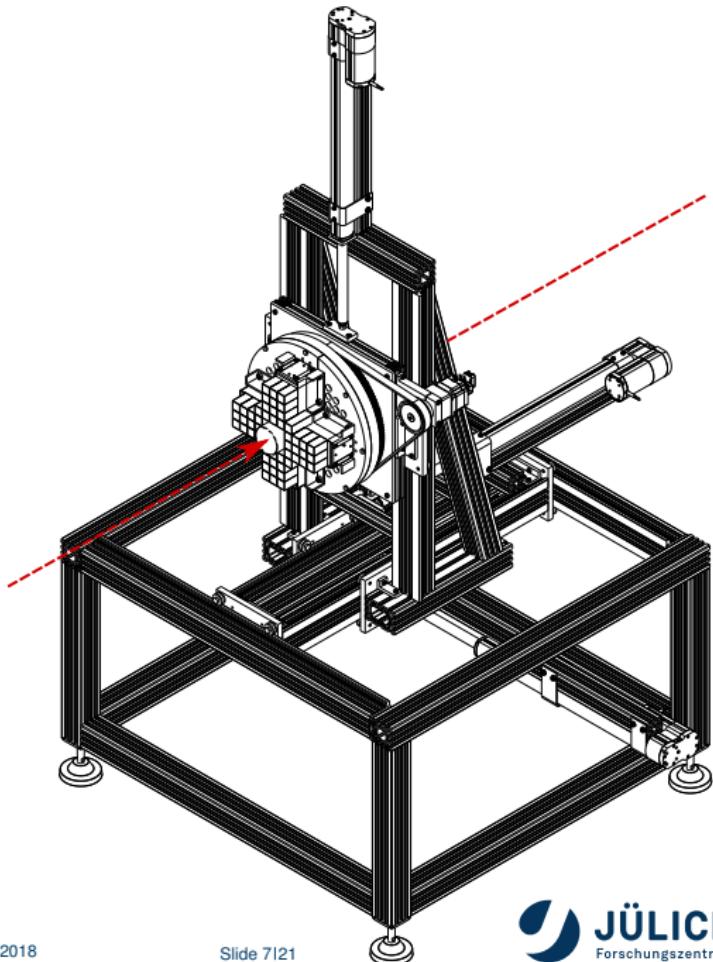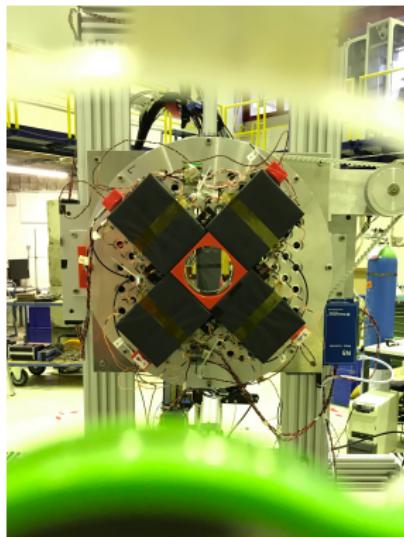

# BIG KARL EXP. HALL

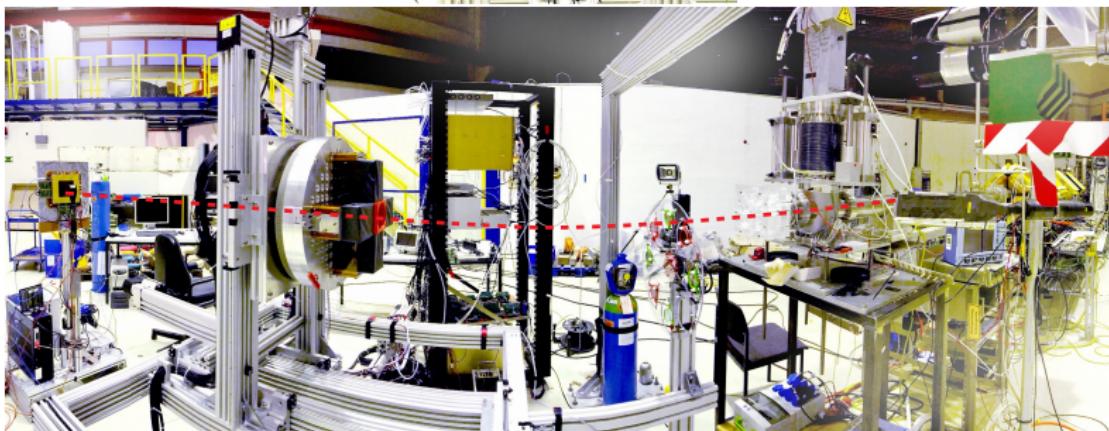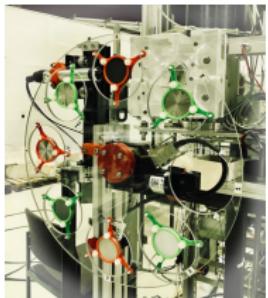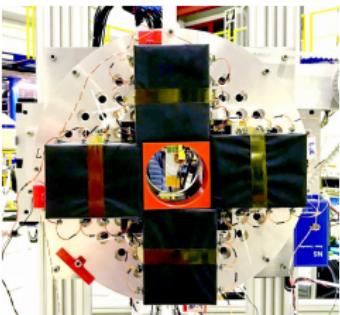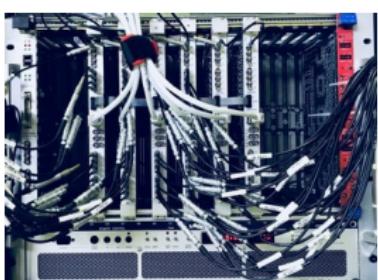


# SADC BASED DAQ SYSTEM

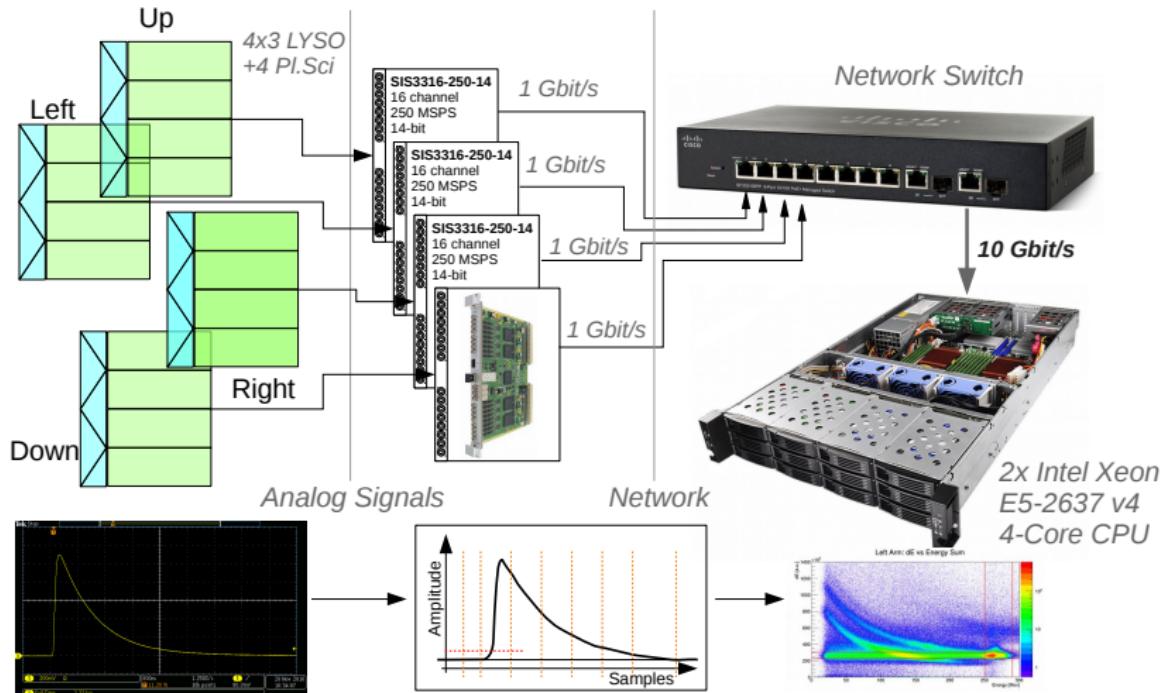


# SIGNAL SHAPES

## Full signal shape vs 8 accumulator/integral region

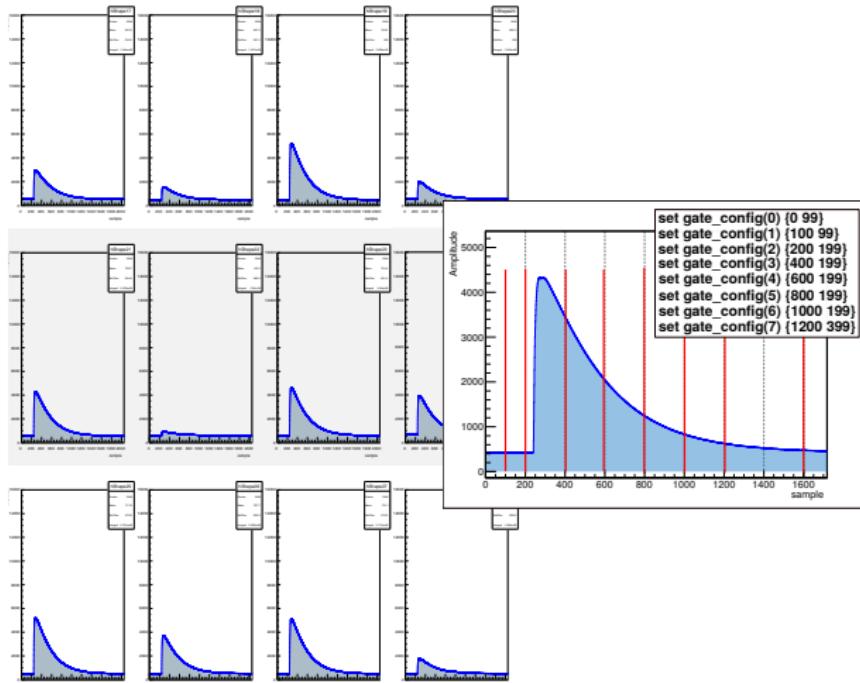

# SIGNAL SHAPES




## Full signal shape vs 8 accumulator/integral region

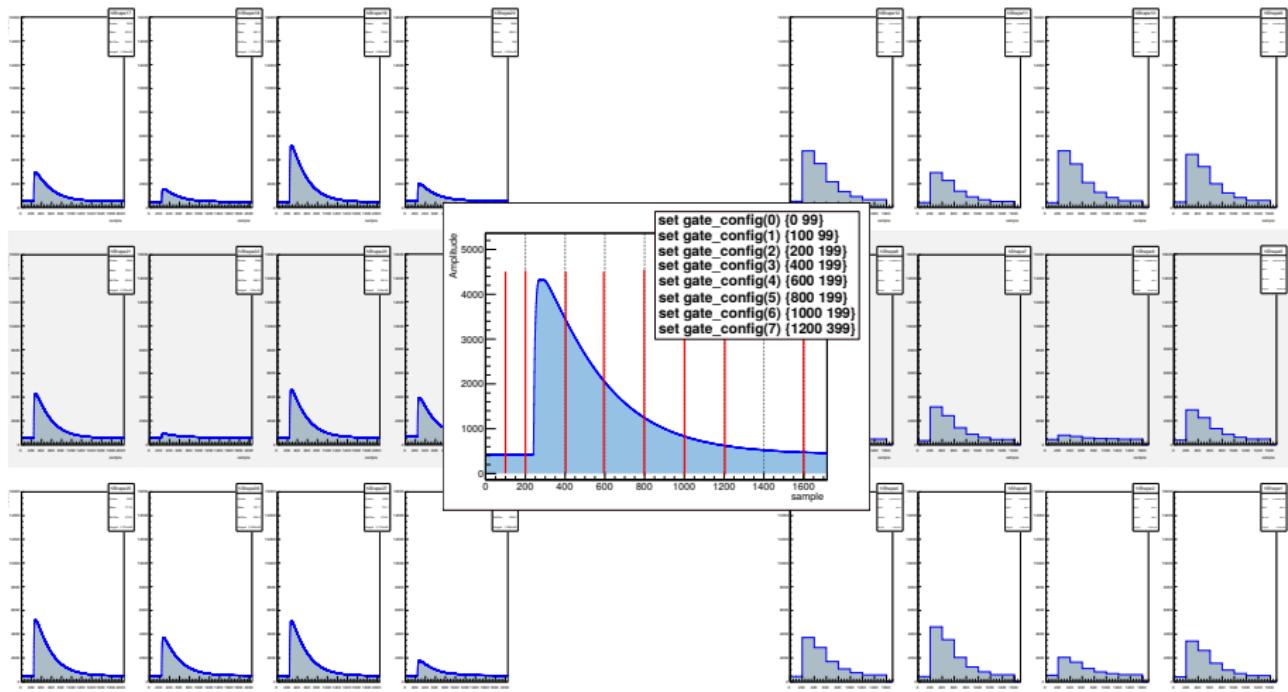

## SIPM VOLTAGE SUPPLY


Very Good Long Term Stability  $\sim 50\mu V_{pp}$

Entirely SmartLab and Agruni contribution

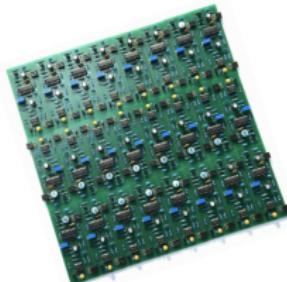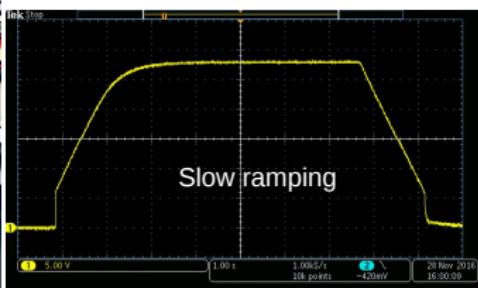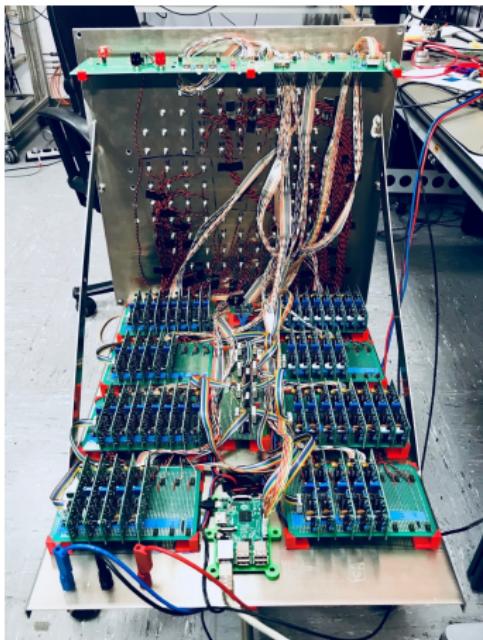

# VOLTAGE MONITORING

## Monitoring of all channels

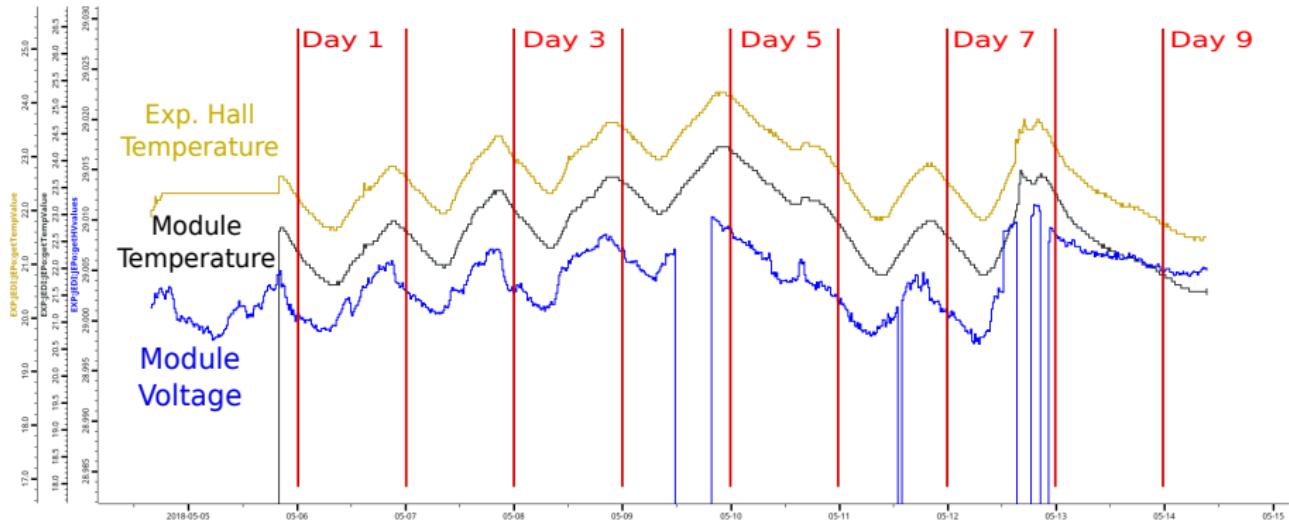


# LYSO MODULE

## New improved mechanics and electronic components




# ONLINE MONITORING SYSTEM

## Monitoring of all amplitudes

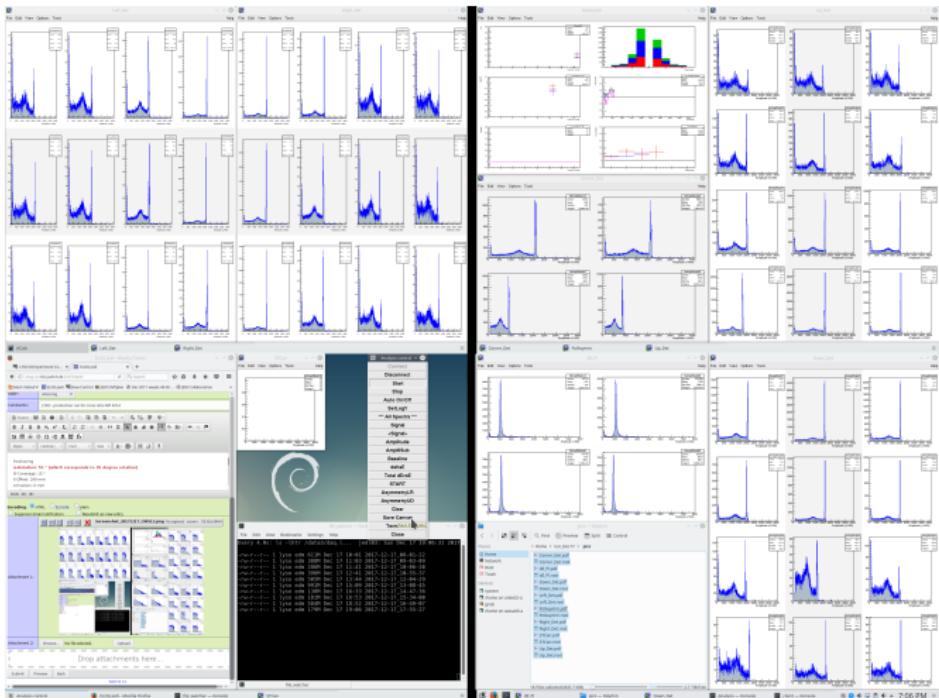


# LYSO-SiPM RESOLUTION

## from F. Mueller

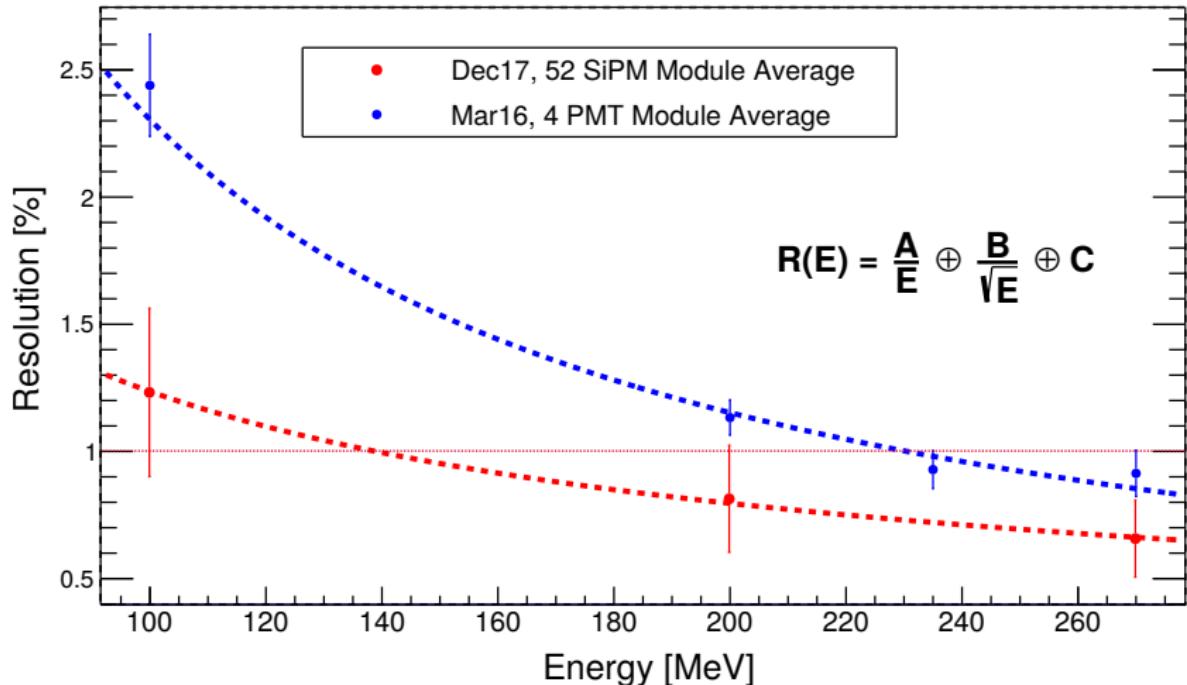

# LYSO-SIPM LINEARITY

## from F. Mueller

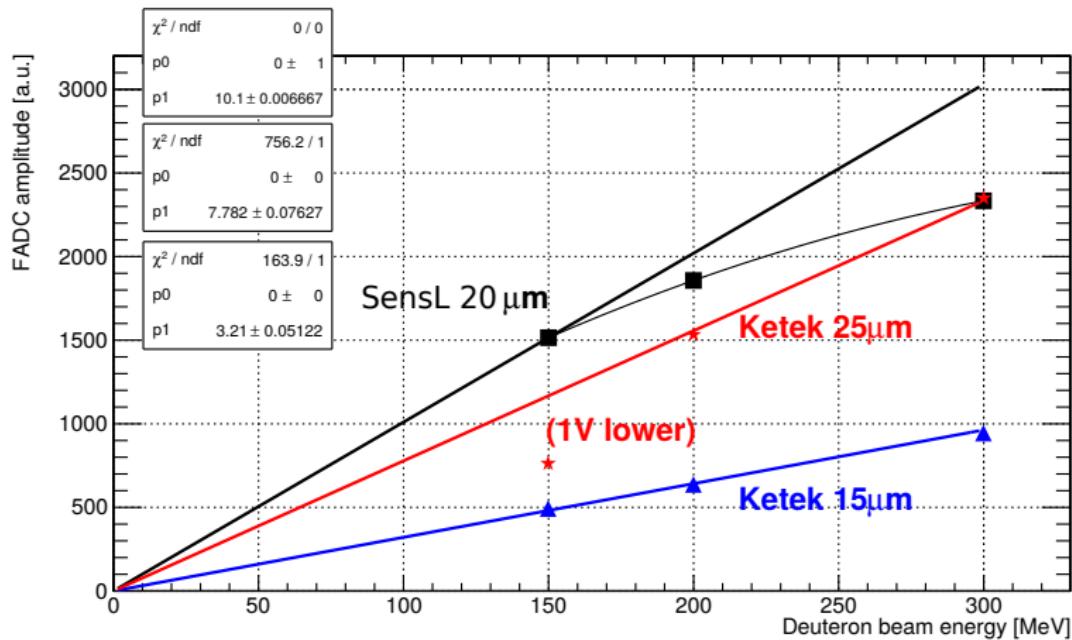

# SLOW CONTROL SYSTEM

## Controls all movements

Firefox File Edit View History Bookmarks Tools Window Help

LYSO III Experiment Control

lys02.lkp.kfa-juelich.de

Most Visited W wiki G Google Researchers make p... News Software Hardware FZJ tRgln Art Multimedia Physics tmp

Search

LYSO III Experiment Status

Actuators

- o-Rotation: online
- Start Counter: online
- Target Driver: online
- X-Axis: online
- Y-Axis: online
- Z-Axis: online

Positioning

- o-Rotation: 55 °
- θ-Coverage: 15 °
- X-Offset: 299 mm
- X-Position: 0 mm
- Y-Offset: 268 mm
- Y-Position: 0 mm
- Z-Offset: 0 mm
- Z-Position: 0 mm

Target

- Active Target: Silicon
- Start Counter
- Status: out of the beam
- Voltage: 0 V

Position Control

Position Control

Θ-Coverage: 15 ° - 20 ° Set

X-Position: -299 mm - 263 mm Set

Y-Position: -268 mm - 311 mm Set

Z-Position: 0 mm - 570 mm Set

Target Control

Empty Target	Nickel
Carbon	Tin
Aluminum	Silicon
Magnesium	Polyethelene



Start Counter

Position: Move Start Counter In

Voltage: 0 V - 1200 V Set


# START COUNTER

## Clearly seen deuteron pile-ups

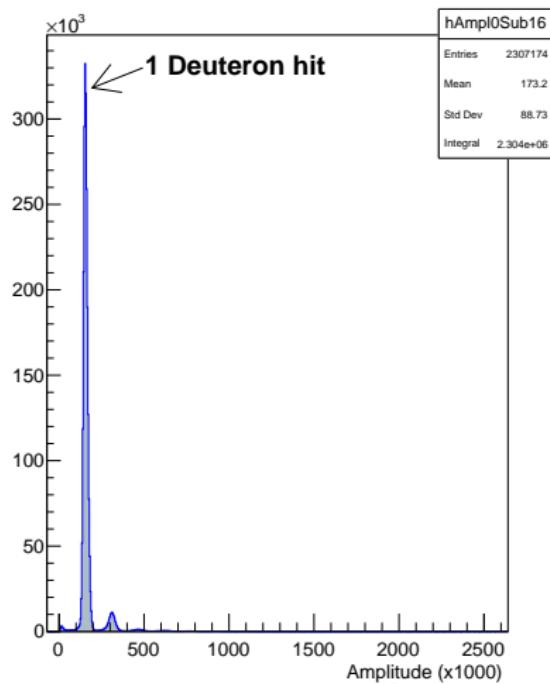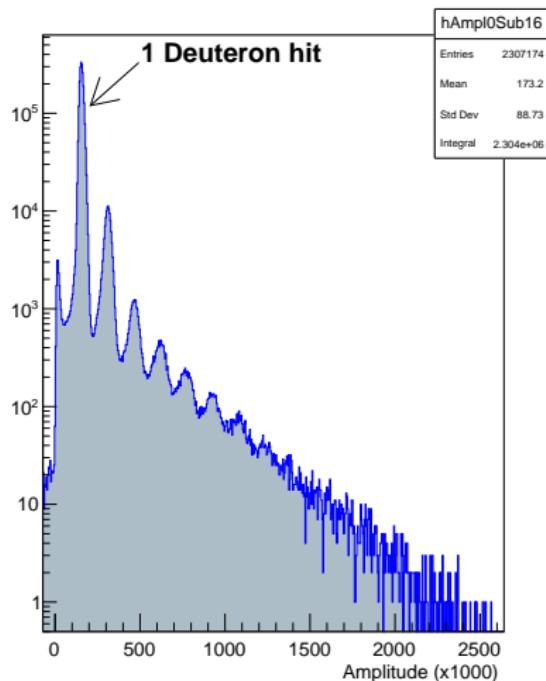



# ASYMMETRY

Carbon at  $\Theta_{max} = 10^\circ$  and  $\Theta_{max} = 15^\circ$

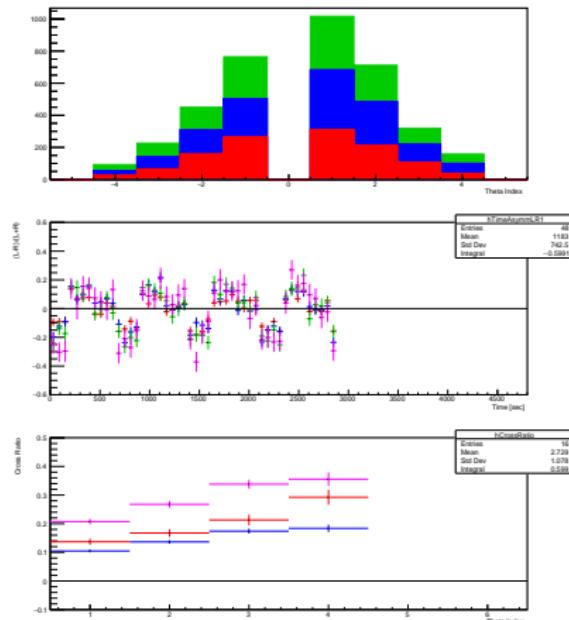


# ASYMMETRY

Carbon at  $\Theta_{max} = 10^\circ$  and  $\Theta_{max} = 15^\circ$

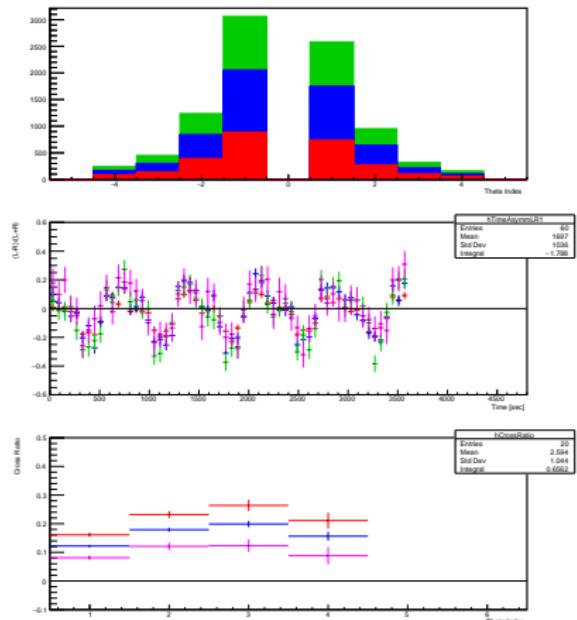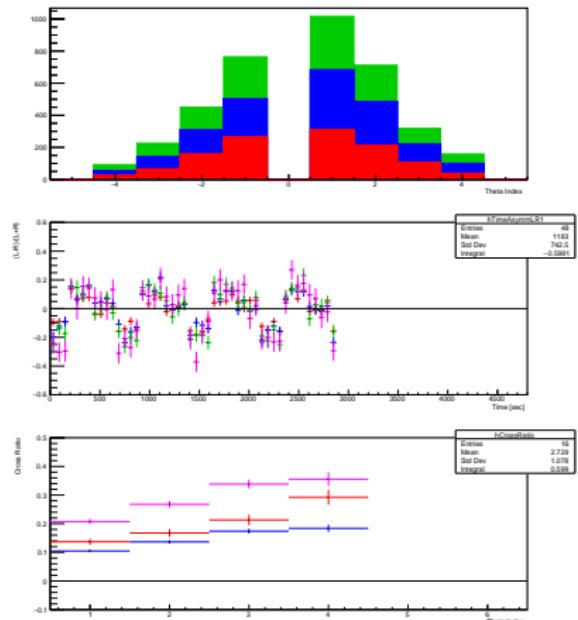



# ASYMMETRY

Different target materials (left Nickel; right Tin)

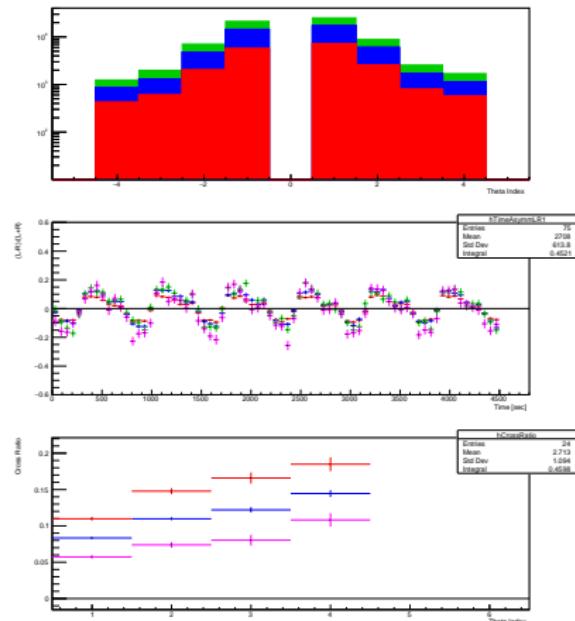

# ASYMMETRY

Different target materials (left Nickel; right Tin)

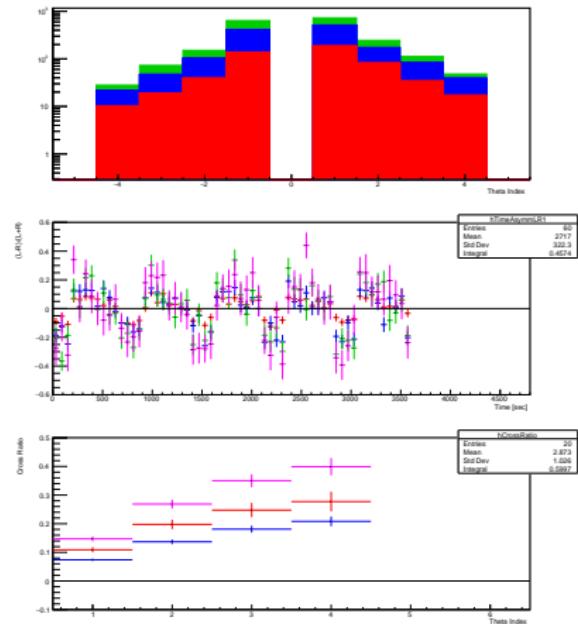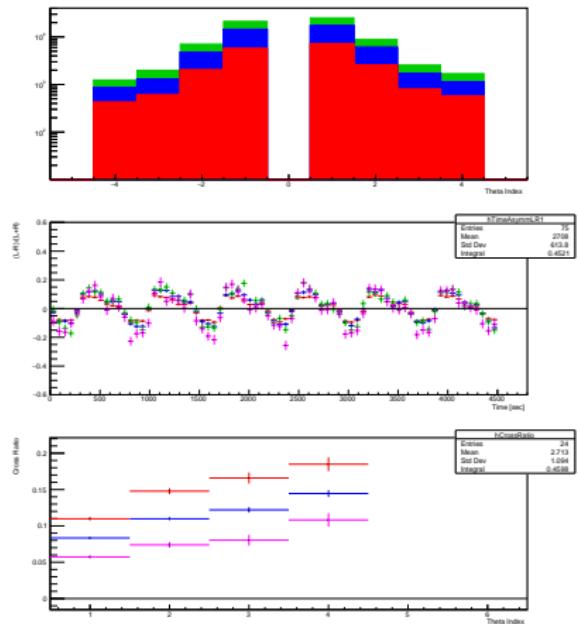

## SUMMARY

- We have functional online polarimeter  
–needs further software development!
- Mechanical support & slow control shows excellent performance
- New DAQ system reached its max. designed data transfer of 400 MB/s
- We have assembled and tested new LYSO and SiPM vendors **in total 48+4 Modules**
- **Next major step is to install a tracking system made with the triangular scintillator bar**

