

13th International Conference on
Polarized Neutrons for
Condensed Matter
Investigations (PNCMI)

JULY 27 – 30, 2021

VIRTUAL



Welcome

The 13th international Polarized Neutrons for Condensed-Matter Investigations (PNCMI) Conference, organized by NIST, will be held online from July 27-30, 2021. This first short online PNCMI will feature 2 daily one-hour sessions from 9:00 am to 11:30 am US Eastern Time with a 30 minute break between sessions for 4 consecutive days and include both invited and poster presentations.

Despite the pandemic, 100 participants from more than 30 institutions and governments from Europe, Asia, Australia, and North America registered for the conference. We would like to thank all participants for joining us and hope you all to enjoy great scientific discussions and interactive gathering over the conference. We would also like add special thanks to the International Advisory Committee for guidance in developing extraordinary scientific program and NIST Conference Services for all their hard work and planning to help organize and host this meeting.

The next in-person PNCMI will take place in Annapolis, Maryland, USA in July, 2022.

PNCMI 2021 local organizing committee

Event Format

Our plenary sessions will be held on the BlueJeans Events platform virtual auditorium. Participants will have the opportunity to ask questions using the Q&A tab within the platform. A NIST AV technician will be available throughout the event to assist with troubleshooting technical issues.

The poster sessions and several of the breaks will be held on the GatherTown platform. This interactive platform consists of a map representing a conference center with different rooms/areas. An avatar will be created for you and placed in a large central room. You will be able to move your avatar to different rooms using your arrow keys. Movement will allow you to network with other conference attendees, view the posters and talk to the poster presenters.

About PNCMI

PNCMI started its long journey in Dubna, Russia in 1996 and has taken place biennially since then. The conference will cover the latest condensed-matter investigations using polarized neutrons and state-of-the-art methodologies and techniques of polarized-neutron production and utilization for novel instrumentation and experiments, with emphasis on prospects for new science and instrument concepts as well as combining neutrons with complementary techniques and in-situ secondary measurements.

PNCMI is the most comprehensive conference on the latest scientific research using polarized neutrons and on related instrumentation development. The topics will include:

- Multiferroics and chirality
- Strongly correlated electron systems
- Frustrated and disordered systems
- Quantum materials
- Magnetic nanomaterials
- Thin films and multilayers
- Soft matter
- Imaging
- Polarized neutron instrumentation
- Polarized neutron techniques and methods

Program Committees

International Advisory Committee

- Ken Andersen (SNS, USA), **Chair**
- Arantxa Arbe (U. Basque Country, Spain)
- Thomas Brückel (FZJ, Germany)
- Bela Farago (ILL, France)
- Arsen Goukassov (CEA, France)
- Sergey Grigoriev (PNPI, Russia)
- Takashi Ino (J-Parc, Japan)
- Sasha Ioffe (MLZ, Germany)
- Kazu Kakurai (CROSS/J-PARC, Japan)
- Thomas Keller (MLZ, Germany)
- Sean Langridge (STFC, UK)
- Valeria Lauter (SNS, USA)
- Yuntao Liu (CARR, China)
- Garry McIntyre (ANSTO, Australia)
- Andreas Michels (University of Luxembourg, Luxembourg)
- Katia Pappas (TU Delft, Netherlands)
- Roger Pynn (Indiana University, USA)
- Astrid Schneidewind (MLZ, Germany)
- Jochen Stahn (PSI, Switzerland)
- Ross Stewart (STFC, UK)
- Jörg Voigt (FZJ, Germany)
- Igor Zaliznyak (BNL, USA)

Local Organizing Committee

- Julie Borchers (NIST, USA)
- Hannah Burrall (NIST, USA)
- Wangchun Chen (NIST, USA), **Chair**
- Antonio Faraone (NIST, USA)
- Alexander Grutter (NIST, USA)
- Kathryn Krycka (NIST, USA)
- William Ratcliff (NIST, USA)
- Shannon Watson (NIST, USA)

Contents

Program

Welcome	2
Program Committees	4
Conference Schedule	6
Gather Tips	7

Abstracts

Invited Talks	10
Poster Session 1	24
Poster Session 2	49
Conference Participants.....	71

PNCMI 2021 Conference Schedule

	Tuesday, July 27th	Wednesday, July 28th	Thursday, July 29th	Friday, July 30th
USA, EST	1st Session (9:00 - 10:00 AM, USA Eastern Time)			
9:00 AM	Welcome Dan Neumann	Magnetism Alexander Ioffe Andrew Manning (ANSTO)	Poster Session	Poster Session
9:05 AM	Quantum Materials Kemp Plumb Yixi Su (JCNS)	Magnetism Alexander Ioffe Takashi Kurumaji (U. Tokyo)		
9:30 AM				
9:35 AM	Polarized Neutron Instrumentation Ross Stewart Vasile Ovidiu Garlea (ORNL)	Break in GatherTown (10:00 AM - 10:30 AM Eastern Time)		
10:00 AM				
10:05 AM	Break in GatherTown (10:05 AM - 10:30 AM Eastern Time)			
	2nd Session (10:30 - 11:30 AM, USA Eastern Time)			
10:30 AM	Nanostructures Yumi Ijiri Sabrina Disch (U. Cologne)	Polarized Neutron Instrumentation Thomas Gentile Xin Tony Tong (CSNS)	Magnetism Rebecca Dally Nikolaos Biniskos (JCNS)	Larmor Techniques Roger Pynn Johanna Jochum (TUM)
11:00 AM	Nanostructures Yumi Ijiri Deepak Singh (U. Missouri)	Polarized Neutron Instrumentation Thomas Gentile Kathryn Krycka (NCNR)	Magnetism Rebecca Dally Jennifer Graham (U. Birmingham/ILL)	Polarized Neutron Methods William Ratcliff Iurii Kibalin (LLB)
11:30 AM				
11:35 AM				Concluding Remarks Wangchun Chen

	Time Zone					
	US EST	UK	West Europe	China	Japan/Korea	Australia
Start time	9:00	14:00	15:00	21:00	22:00	1:00
End time	11:30	16:30	17:30	23:30	0:30	3:30

Welcome to PNCMI 2021 Gather

Gather is home to the PNCMI 2021 virtual meeting space for conference attendees to interact more effectively online. The conference poster sessions and breaks will be hosted in this space. The platform combines video-calling with a 2D map, allowing attendees to walk around and talk to other users right next to them and/or join other interactive spaces.


Getting Started

To join the PNCMI 2021 Gather click the invite link sent via email or copy and paste the link into a web browser. Right now, Gather is supported on Chrome, Firefox and Desktop Safari (in Beta).


Gather must request permission to use your microphone and camera from the web browser. For more information on how to enable your audio/video settings visit: <https://support.gather.town/help/browser-settings-and-permissions>

Tips for Using Gather

Use the keyboard arrow keys to navigate your avatar through the space. You can also use your mouse to move around in Gather. Double-click on a tile to walk to it. [Clicking to move](#) will automatically try and avoid private spaces.




When your avatar approaches others, a video call automatically starts between you and the people you approach. All videos will initially appear at the top of your screen. In an open area, you will be connected to everyone within 5 tiles unless you activate [Quiet Mode](#). When you are in a [Private Area](#), you will be connected to everyone who is also inside of the private area.

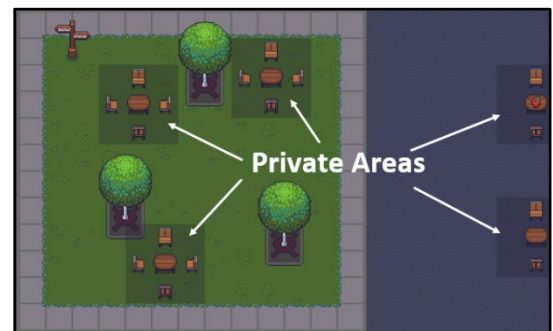


Users can send and view messages in the [Chat Panel](#), located above the participants tab, second from the bottom on the left of your screen. Here, you can view past messages, as well as send messages of your own.

You can [share your screen](#) with all of the people you are connected to on Gather if it is enabled in the space that you are in.




[Spotlighting](#): Being spotlighted means having your video and audio broadcasted to up to 100 users in the same room. When you are spotlighted, you will be able to see the other users you are broadcasting to, however, their audio will be muted for you unless they are in the typical connection range to see and interact with you.

Several pre-set [games](#) have been incorporated into the lounge space. These games are set up so you can join private games within your Gather space while video chatting with friends.

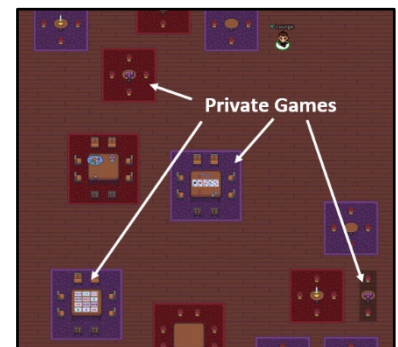

Poster Sessions

The live poster sessions will take place on PNCMI 2021 Gather on **Thurs. July 29** and **Fri. July 30** from **9:00 – 10:00 AM, USA Eastern Time**. The sessions will take place in dedicated rooms where posters will already be pre-loaded and organized in a grid similar to an in-person conference. To interact with a poster, conference attendees will walk up to the poster and press the “x” key to enter a full screen viewing. While viewing the poster, they will also be able to interact with the presenter. An example poster room looks like this:

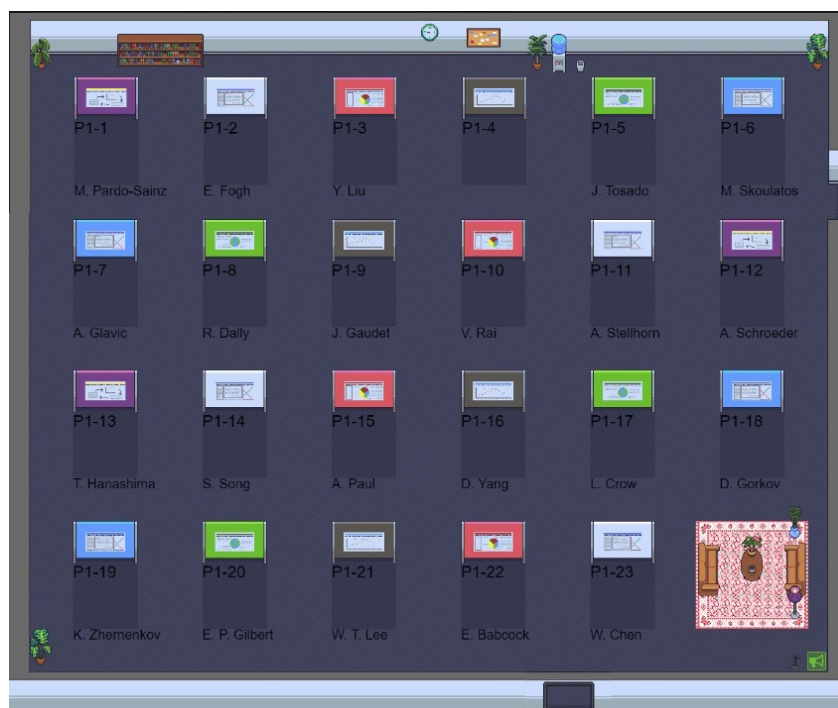


When your avatar is in the private space near a poster, all other conference attendees in that space will be able to see and hear you through your webcam and microphone. You will only be interacting with people in this space, and not the neighboring spaces. This promotes conversation with the presenter without interrupting conversation going on at other posters.

More Information

Additional information about the Gather platform and troubleshooting advice can be found at [Gather.Town's Help Center](#). Feel free to direct other questions about the platform to the conference email at pncmi2021@nist.gov.

Gather Space Map

The PNCMI 2021 Gather space consists of a large Main Room equipped with several private meeting areas perfect for breakout sessions and smaller discussions. The poster sessions will take place in Poster Room 1 & 2 located above the Main Room. The deluxe lounge space is ideal for smaller video calls and includes several pre-set games for single and group entertainment. Feel free to explore the other conference spaces including two keynote rooms and an outdoor social area. Remember that users can send and view chat messages to coordinate meeting spaces via the [Chat Panel](#), located above the participants tab, second from the bottom on the left of your screen.

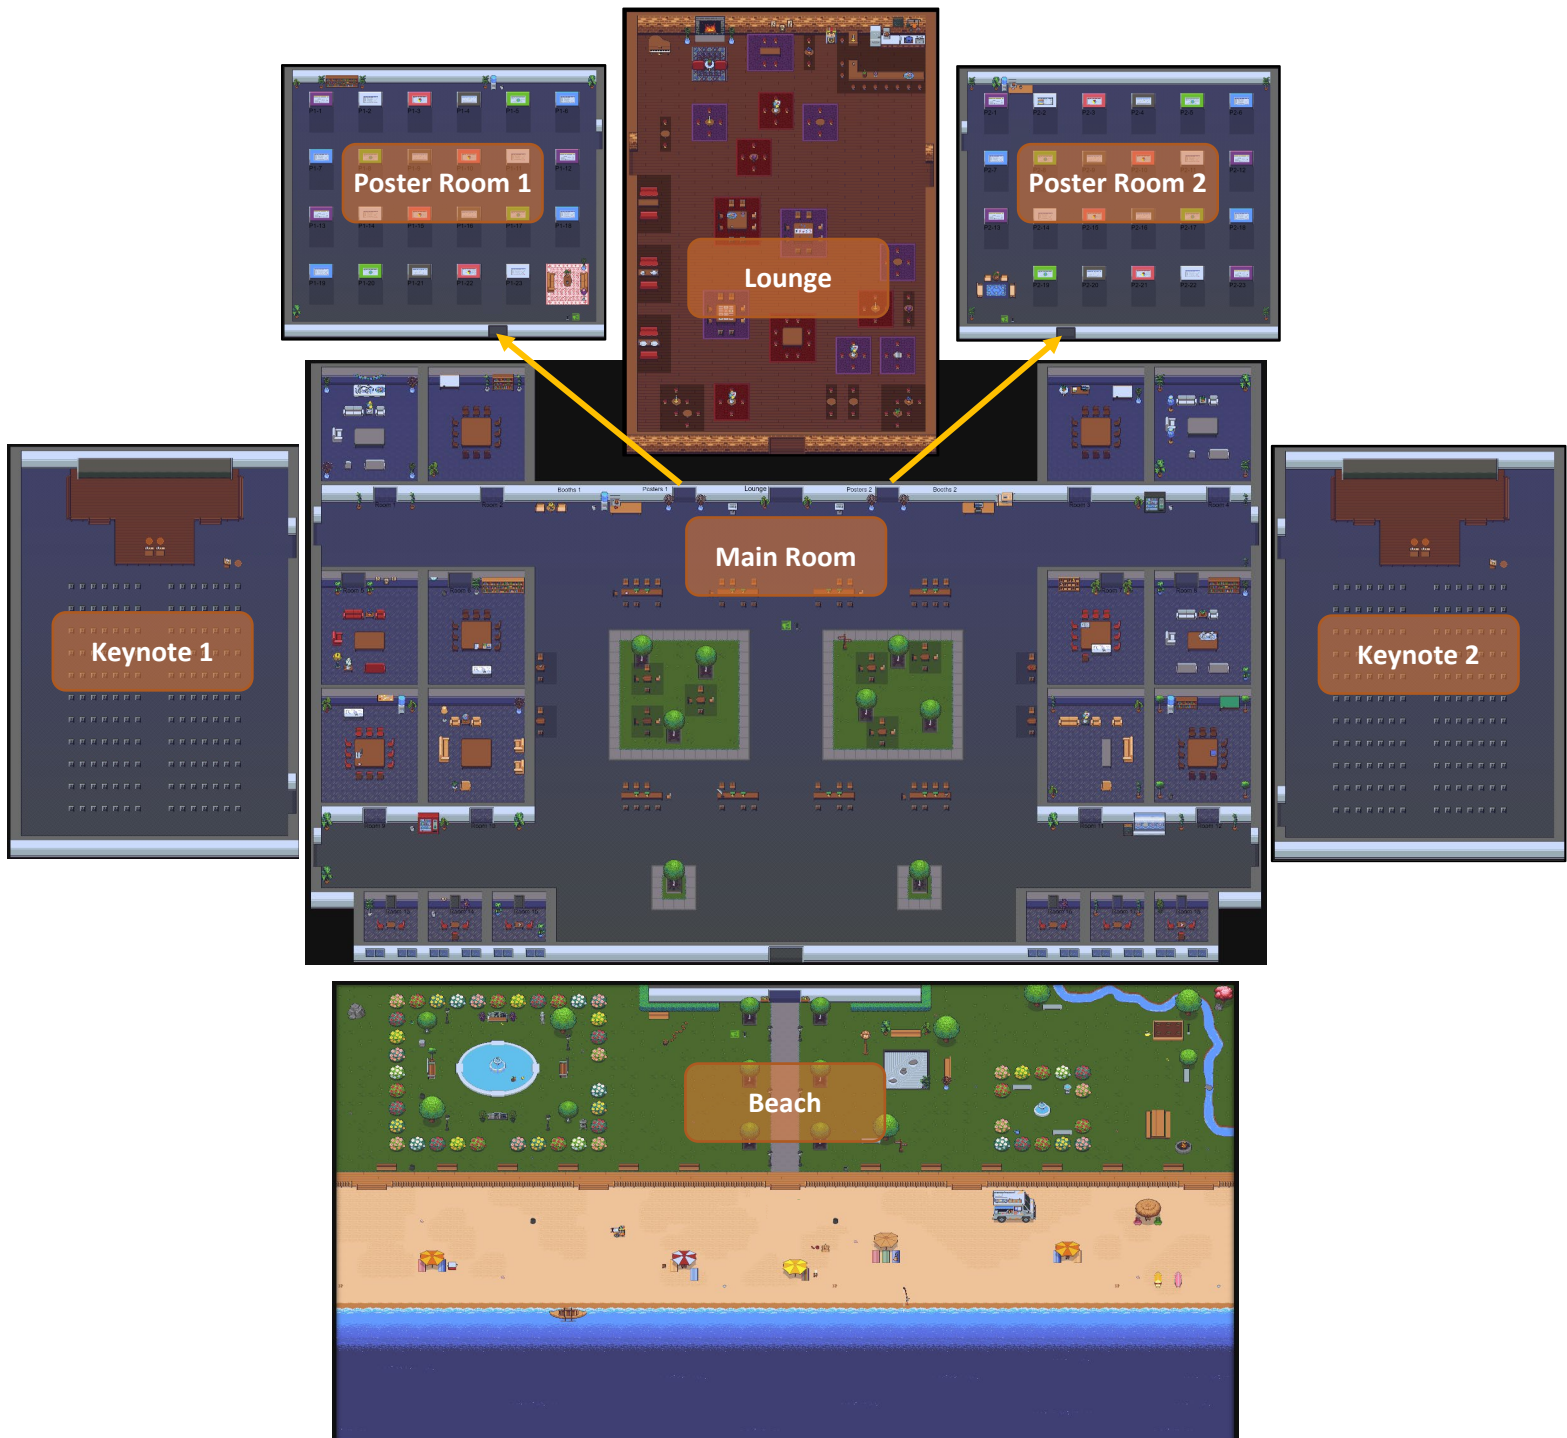

Abstracts – Invited Talks

Tuesday, July 27th, 2021

Session 1-1: Quantum Materials, 9:05 – 9:35 am (EST)
Neutron scattering on correlated topological materials
Yixi SU
Page 12

Session 1-2: Polarized Neutron Instrumentation, 9:35 – 10:05 am (EST)
Polarized neutron capabilities at the HYSPEC spectrometer at SNS
Ovidiu GARLEA, Melissa GRAVES-BROOK, Barry WINN
Page 13

Session 2-1: Nanostructures, 10:30 – 11:00 am (EST)
Revealing Magnetic Morphologies and Spin Disorder in Ferrite Nanoparticles
Dominika ZÁKUTNÁ, Dirk HONECKER, Sabrina DISCH
Page 14

Session 2-2: Nanostructures, 11:00 – 11:30 am (EST)
Investigation of Quantum Disordered State in Magnetic Honeycomb Lattice
Deepak K. SINGH
Page 15

Wednesday, July 28th, 2021

Session 3-1: Magnetism, 9:00 – 9:30 am (EST)
Update on the neutron polarisation capabilities at the Australian Centre for Neutron Scattering, ANSTO
Andrew MANNING
Page 16

Session 3-2: Magnetism, 9:30 – 10:00 am (EST)
Direct observation of cycloidal spin modulation in Néel-type skyrmion-hosting VSe₂O₅
Takashi KURUMAJI, Taro NAKAJIMA, Artem FEOKTYSTOV, Earl BABCOCK, Zahir SALHI, Victor UKLEEV, Taka-hisa ARIMA, Kazuhisa KAKURAI, and Yoshinori TOKURA
Page 17

Session 4-1: Polarized Neutron Instrumentation, 10:30 – 11:00 am (EST)
Polarized neutron R&D at the China Spallation Neutron Source
Xin TONG
Page 18

Session 4-2: Polarized Neutron Instrumentation, 11:00 – 11:30 am (EST)
A survey of NCNR instruments equipped with polarized neutron analysis for studying magnetic systems
Kathryn KRYCKA, Shannon WATSON, Hannah BURRALL, Ross ERWIN, Alex GRUTTER, Julie BORCHERS, and Wangchun CHEN
Page 19

Thursday, July 29th, 2021

Session 5-1: Magnetism, 10:30 – 11:00 am (EST)

Investigating the spin excitation spectrum of Mn₅Si₃

N. BINISKOS, F.J. DOS SANTOS, S. RAYMOND, K. SCHMALZL, M. DOS SANTOS
DIAS, S. BLÜGEL, S. LOUNIS, T. BRÜCKEL

Page 20

Session 5-2: Magnetism, 11:00 – 11:30 am (EST)

Local nuclear and magnetic order in the two-dimensional spin glass, Mn_{0.5}Fe_{0.5}PS₃

Jennifer N. GRAHAM, Matthew J. COAK, Suhan SON, Emmanuelle SUARD, Je-Geun
PARK, Lucy CLARK and Andrew R. WILDES

Page 21

Friday, July 30th, 2021

Session 6-1: Larmor Techniques, 10:30 – 11:00 am (EST)

MIEZE@RESEDA: Spin-echo optimized for magnetic phenomena

Johanna K. JOCHUM, Christian FRANZ, P. BENDER, J. LEINER, O. SOLTWEDEL, C.
FUCHS, P. BÖNI, C. PFLEIDERER

Page 22

Session 6-2: Polarized Neutron Methods, 11:00 – 11:30 am (EST)

Data analysis of polarized neutron single crystal and powder diffraction

Iurii KIBALIN, Arsen GUKASOV

Page 23

Neutron scattering on correlated topological materials

Yixi Su

Forschungszentrum Jülich, Jülich Centre for Neutron Science (JCNS) at Heinz Maier-Leibnitz Zentrum (MLZ), Garching, Germany

Recent theoretical predictions and experimental realizations of exotic quasi-particles and topological excitations in condensed matter have led to tremendous research interests in topological quantum materials. Especially, correlated topological materials, such as e.g. magnetic Dirac and Weyl semimetals, and intrinsic magnetic topological insulators, in which both non-trivial topology of single-electron band structures and electron-electron correlations are essential ingredients, have emerged as an exciting platform to explore novel electronic and magnetic phenomena. In this talk, I will present a couple of selected examples of our recent neutron scattering studies along this line, with particular emphasis on the applications of polarized neutron scattering in disentangling complex magnetic orders.

[1] Fengfeng Zhu, *et al.*, Phys. Rev. Research **2**, 043100 (2020).

E-mail of the corresponding author: y.su@fz-juelich.de

Polarized neutron capabilities at the HYSPEC spectrometer at SNS

Ovidiu GARLEA, Melissa GRAVES-BROOK, Barry WINN

Neutron Scattering Division, Oak Ridge National Laboratory, Oak Ridge, TN 37831 USA

The HYSPEC spectrometer at the Spallation Neutron Source combines time-of-flight spectroscopy with focusing Bragg optics to allow for either unpolarized or polarized neutron scattering experiments. The incident neutron beam is monochromated using a Fermi chopper and is then vertically focused by Bragg scattering onto the sample position by either a highly oriented pyrolytic graphite or a Heusler crystal array. The polarization analysis of the scattered neutrons is carried out by a multi-channel array consisting of 960 FeCoV-based supermirror polarizers distributed over 60 degrees horizontally, with ± 7.5 degrees acceptance vertically. The region around the sample is sufficiently configurable to accommodate a variety of polarization optics. Linear XYZ-polarization analysis is carried out by measurements of non-spin-flip and spin-flip cross sections for three orthogonal directions of the incident polarization vector with respect to the scattering vector. A Mezei flipper is used to reverse the incident neutron polarization, and the polarization vector is oriented by employing a guide field generated from a set of 3D coils situated around the sample position. Various upgrades have been made to improve the polarization analysis operations and effectiveness at HYSPEC. One such improvement is an elevator / oscillator system, which for the first time enables rapid change from an unpolarized or half polarized mode to a polarization analysis mode of operation, introducing significant flexibility and convenience. Additional upgrades include a newly built RF flipper and a new and compact 3D coil system. The current status of the polarization capability at HYSPEC will be illustrated by an overview of recent polarized elastic and inelastic scattering studies of several magnetic materials.

E-mail of the corresponding author: garleao@ornl.gov

Revealing Magnetic Morphologies and Spin Disorder in Ferrite Nanoparticles

Dominika ZÁKUTNÁ^{1,2}, Dirk HONECKER³, Sabrina DISCH¹

¹University of Cologne, Chemistry Department, Cologne, Germany

²Charles University, Department of Inorganic Chemistry, Prague, Czech Republic

³ISIS Neutron and Muon Source, Rutherford Appleton Laboratory, Didcot, United Kingdom

Being intrinsic to nanomaterials, disorder effects crucially determine the magnetization properties such as the heating performance of magnetic nanoparticles [1-4]. However, despite the considerable technological relevance and fundamental importance, a key challenge in magnetic nanoparticle research remains the quantitative interpretation of the three-dimensional magnetic configuration and the nanoscale distribution of magnetization and spin disorder. In this contribution, we will present our recent results on the magnetic morphologies and spin disorder in ferrite nanoparticles seen by magnetic SANS.

Polarized SANS is a versatile technique to investigate the chemical morphology and magnetization with nanoscale spatial resolution [5]. Physical and chemical properties of magnetic nanoparticles highly depend on their synthesis method and ageing behavior. Whereas the overall Fe:Co distribution in our as-prepared cobalt ferrite nanoparticles is homogeneous, the sensitivity of SANS to nanoscale density variations reveals a wuestite-like core and a spinel-type shell with different local magnetization. We further analyze the progressive oxidation of the core and the aging process into single-phase ferrite nanoparticles with nearly homogeneous magnetization distribution.

Single-phase magnetic nanoparticles are classically considered as a collinearly magnetized core with a structurally and magnetically disordered surface region. We have recently shown that this static idea needs revision as the intra-particle magnetization is more complex with a field-dependent magnetization process near the surface [6]. We have established a significant field-induced growth of the total particle moment by a magnetic ordering transition at the structurally disordered surface. Finally, we have elucidated the intra-particle spin-disorder energy, giving indirect insight into the structural defect profile in magnetic nanoparticles.

[1] P. Bender et al., J. Phys. Chem. C, **122**, 3068 (2018).

[2] A. Lak et al., Nano Lett., **18**, 6856 (2018).

[3] A. Lappas et al., Phys. Rev. X, **9**, 041044 (2019).

[4] A. Lak, S. Disch, P. Bender., Adv. Science, **8**, 2002682 (2021).

[5] S. Mühlbauer et al., Rev. Mod. Phys., **91**, 015004 (2019).

[6] D. Zákutná, D. Honecker, S. Disch et al., Phys. Rev. X, **10**, 031019 (2020).

E-mail of the corresponding author: sabrina.disch@uni-koeln.de

Investigation of Quantum Disordered State in Magnetic Honeycomb Lattice

Deepak K. Singh

Department of Physics, University of Missouri. Columbia, MO 65211

Nanostructured magnetic materials with geometrically frustrated motif provides archetypal platform to study emergent phenomena in reduced dimension. [1, 2] Recently conceived magnetic honeycomb lattice of single domain nanoscopic element, with typical length of ~ 12 nm, stands out in this quest. [3] The spin ice type configuration of local magnetic moments in a honeycomb automatically generates magnetic charges of low ($\pm Q$) and high ($\pm 3Q$) multiplicities on the vertices. The quantum mechanical nature of magnetic charges, represented by Pauli matrices, imparts unique advantage to explore new quantum state in the classical system. Thermal tunability of the lattice is a necessary requirement to this quest. The single domain element in our honeycomb lattice reduces the inter-elemental dipolar interaction energy to an unprecedented small value of ~ 10 K.[3] The new sample design enabled neutron-based exploration of emergent magnetic phases in two-dimensional honeycomb lattice.[4] More recently, we have discovered a quantum disordered state of magnetic charges, akin to the charge liquid state, in thermally tunable system.[5] Detailed experimental investigation of nanoengineered honeycomb lattice using spin polarized neutron reflectometry (PNR) and spin echo measurements have revealed massively degenerate magnetic charge configurations at low temperature that remain mostly unperturbed to external effect, such as large magnetic field application. The overall magnetization manifests a cooperative paramagnetic behavior as a function of temperature due to the charge correlation on honeycomb vertices. Most importantly, magnetic charges remain highly dynamic to the lowest measurement temperature of $T = 5$ K.[6] The experimental observations e.g. large degeneracy of ground state configuration, independence to external tuning parameter, paramagnetic characteristic and persistent dynamics are the hallmark of liquid-like quantum disordered state.[7] The new finding establishes the quantum mechanical characteristic of magnetic charge in artificial spin ice systems.

DKS thankfully acknowledges the support by the Department of Energy, Office of Science, Office of Basic Energy Sciences under the grant no. DE-SC0014461. Neutron scattering research works are performed at US DOE-BES supported facility at SNS-ORNL.

- [1] S. Skjaerrvo, C. Marrows, R. Stamps and L. Heyderman, *Nat. Rev. Phys.* **2**, 13 (2020).
- [2] C. Nisoli, R. Moessner and P. Schiffer, *Rev. Mod. Phys.* **85**, 1473 (2013)
- [3] B. Summers, L. Debeer-Schmitt, A. Dahal, A. Glavic, P. Kampschroeder, J. Gunasekera and D. K. Singh, *Phys. Rev. B* **97**, 014401 (2018)
- [4] A. Glavic, B. Summers, A. Dahal, J. Kline, W. Van Herck, A. Sukhov, A. Ernst and D. K. Singh, *Advanced Science* **5**, 1700856 (2018)
- [5] G. Yumnam, Y. Chen, J. Guo, V. Lauter and D. K. Singh, *Advanced Science* **8**, 2004103 (2020).
- [6] Y. Chen, G. Yumnam, J. Guo, L. Stingciau, P. Zolnierczuk, V. Lauter and D. K. Singh, *iScience* **24**, 102206 (2021)
- [7] A. S. Wills, R. Ballou and C. Lacroix, *Phys. Rev. B* **66**, 144407 (2002)

E-mail of the corresponding author: singhdk@missouri.edu

Update on the neutron polarisation capabilities at the Australian Centre for Neutron Scattering, ANSTO

Andrew Manning

ANSTO, Lucas Heights, Australia 2234

An overview of the neutron polarisation capabilities across the six compatible instruments at the Australian Centre for Neutron Scattering (ACNS) will be presented. This will include a discussion of the newly-acquired compensated 7 Tesla vertical magnet, which was designed specifically for neutron polarisation experiments on the SANS instrument Quokka in addition to other powder diffraction instruments, time-of-flight and triple-axis spectrometers.

Some recent experiments using these capabilities will be outlined, including a measurement of the chiral characteristics of a helimagnetic structure on the cold triple-axis spectrometer Sika.

An update on the current work to prepare XYZ polarisation capabilities for the time-of-flight spectrometer Pelican will also be given, along with an overview of the future directions of the polarisation efforts at ACNS.

E-mail of the corresponding author: andrew.manning@ansto.gov.au

Direct observation of cycloidal spin modulation in Néel-type skyrmion-hosting VOSe_2O_5

Takashi Kurumaji^{1,2}, Taro Nakajima^{1,3}, Artem Feoktystov⁴, Earl Babcock⁴, Zahir Salhi⁴, Victor Ukleev^{1,5}, Taka-hisa Arima^{1,2}, Kazuhisa Kakurai^{1,6}, and Yoshinori Tokura^{1,7}

¹ *RIKEN Center for Emergent Matter Science (CEMS), Wako 351-0198, Japan,*

² *Department of Advanced Materials Science, The University of Tokyo, Kashiwa 277-8561, Japan,*

³ *Institute for Solid State Physics, The University of Tokyo, Chiba 277-8581, Japan,*

⁴ *Forschungszentrum Jülich GmbH, Jülich Center for Neutron Science (JCNS) at Heinz Maier-Leibnitz Zentrum (MLZ), Garching 85748, Germany,*

⁵ *Laboratory for Neutron Scattering and Imaging (LNS), Paul Scherrer Institute (PSI), CH-5232 Villigen, Switzerland,*

⁶ *CROSS-Tokai, Research Center for Neutron Science and Technology, Tokai, Ibaraki 319-1106, Japan,*

⁷ *Department of Applied Physics, The University of Tokyo, Tokyo 113-8656, Japan.*

Magnetic skyrmions are two-dimensional vortex-like spin state carrying a topological number. It is known that a skyrmion is described by the internal degrees of freedom in terms of the spin configuration, termed helicity and vorticity. Two main different types of skyrmions, Bloch or Néel type, are characterized by the helicity. As for the detection of Bloch-type skyrmions, Lorentz transmission electron microscopy is the most well-established technique, however, this method has a limited sensitivity to the Néel-type skyrmions due to the fundamental mechanism for the electron beam deflection via magnetic moments. Other techniques such as spin-polarized scanning tunneling microscopy can be used for local detection of a skyrmions regardless of the form of helicity, yet the probe pin is accessible to only on the surface of the sample. Observation of the spin configuration of Néel-type skyrmions in bulk materials has remained elusive. We investigate the spin rotational structure of magnetic skyrmions in a tetragonal polar magnet VOSe_2O_5 [1] via polarized small-angle neutron scattering. Spin polarization analysis of the scattered neutrons provides consistent evidence for the cycloidal spin modulation in all the incommensurate phases at zero and non-zero magnetic field along the c axis, including the triangular skyrmion-lattice phase [2].

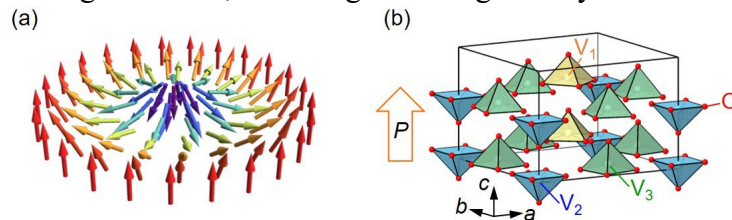


Figure 1 (a) Neel-type skyrmion. (b) Crystal structure of VOSe_2O_5 .

[1] T. Kurumaji *et al.*, Phys. Rev. Lett. **119**, 237201 (2017).

[2] T. Kurumaji *et al.*, J. Phys. Soc. Jpn. **90**, 024705 (2021).

E-mail of the corresponding author: kurumaji[at]edu.k.u-tokyo.ac.jp

Polarized neutron R&D at the China Spallation Neutron Source

Xin Tong

¹China Spallation Neutron Source, Dongguan, China

²Institute of high energy physics, Beijing, China

³Chinese Academy of Sciences, Beijing, China

China Spallation Neutron Source (CSNS) is a new accelerator-based neutron source located at Dongguan, China. There are currently 3 instruments in the general user program with a powder diffractometer, a SANS and a reflectometer. Eight new instruments are being constructed with 10 more coming along in the next few years. Polarization analysis, as an important and unique feature of neutron scattering technique, is one of the focuses of the future of CSNS. The polarized neutron team at CSNS has been developing in-house polarized neutron capabilities for the past two years, focusing on polarized ^3He development, polarized neutron test beamline construction and polarized neutron devices including neutron flippers etc. In this talk I will present the recent progress of these R&D efforts.

[1] Z.C. Qin, et al., *Chin. Phys. Lett.* **38**, 052801, (2021)

[2] C.Y. Huang, et al., *Chin. Phys. Lett.* Accepted, (2021)

E-mail of the corresponding author: tongx@ihep.ac.cn

A survey of NCNR instruments equipped with polarized neutron analysis for studying magnetic systems

Kathryn Krycka¹, Shannon Watson¹, Hannah Burrall¹, Ross Erwin¹, Alex Grutter¹, Julie Borchers¹, and Wangchun Chen^{1,2}

¹National Institute of Standards and Technology, Gaithersburg, Maryland 20899, USA

²University of Maryland, College Park, Maryland 20742, USA

Neutron polarization analysis is a powerful technique to separate magnetic from nuclear scattering. In addition, it can be used to resolve magnetic scattering components originating from spins parallel and perpendicular to the applied guide field, allowing for the study of nanoscale magnetic morphologies, magnetization density profiles, and magnetic excitations in a wide range of magnetic materials. For geometries involving a divergently scattered neutron beam, polarized ³He neutron spin filters¹ can effectively polarize large areas and a broad range of neutron wavelengths; the ³He polarization direction can be reversed at will using integrated NMR spin flipping. Here we shall discuss the current applications on the BT7 triple axis spectrometer², the multi-axis crystal spectrometer³, and NG7 small-angle neutron scattering⁴ instruments. Moreover, we shall cover new developments on CANDOR⁵, including a new 15 cm x 6 cm, high efficiency neutron spin flipper, and VSANS where integration of four cross-section polarization analysis with a high-resolution detector yields polarized measurements down to a reciprocal space of 0.0003 Å⁻¹.

[1] W. C. Chen *et al.*, J. Phys.: Conference Series, **528**, 012014 (2014)

[2] R. L. Dally *et al.*, Phys. Rev. B. **102**, 054403 (2020)

[3] J. Zhang *et al.*, Phys. Rev. Lett. **122**, 247201 (2019)

[4] Y. Ijiri *et al.*, Phys. Rev B **99**, 094421 (2019)

[5] W. C. Chen *et al.*, Rev. of Sci. Inst. **92**, 063906 (2021)

We gratefully acknowledge the Center for High Resolution Neutron Scattering for providing funding.

Investigating the spin excitation spectrum of Mn_5Si_3

N. Biniskos¹, F.J. dos Santos², S. Raymond³, K. Schmalzl⁴, M. dos Santos Dias⁵, S. Blügel⁵,
S. Lounis⁵, T. Brückel⁶

¹Forschungszentrum Jülich GmbH, Jülich Centre for Neutron Science at MLZ,
Lichtenbergstrasse 1, 85748 Garching, Germany

²Theory and Simulation of Materials (THEOS), and National Centre for Computational
Design and Discovery of Novel Materials (MARVEL), 'Ecole Polytechnique Fédérale de
Lausanne, 1015 Lausanne, Switzerland

³Univ. Grenoble Alpes, CEA, IRIG, MEM, 38000 Grenoble, France

⁴Forschungszentrum Jülich GmbH, Jülich Centre for Neutron Science at ILL, 71 avenue des
Martyrs, 38000 Grenoble, France

⁵Peter Grünberg Institut and Institute for Advanced Simulations, Forschungszentrum Jülich
and JARA, 52425 Jülich, Germany

⁶Forschungszentrum Jülich GmbH, Jülich Centre for Neutron Science (JCNS-2) and Peter
Grünberg Institut (PGI-4), JARA-FIT, 52425 Jülich, Germany

Recently materials with non collinear spin arrangements and anomalous physical properties that do not consist from rare earth elements are exploitable for future spintronic and electronic devices and have attracted great scientific interest [1-3]. In this context Mn_5Si_3 is a promising material for applications since interesting thermodynamic and transport phenomena occur, such as the inverse magnetocaloric (MCE) [4] and the anomalous Hall effect [5]. Mn_5Si_3 undergoes two first order phase transitions towards a collinear and non collinear antiferromagnetic phase at $T_{N2} = 100\text{K}$ (AFM2) and $T_{N1} = 66\text{K}$ (AFM1), respectively. The inverse MCE and the large anomalous Hall effect are associated with the AFM1-AFM2 phase transition. A combination of polarized and unpolarized inelastic neutron scattering (INS) measurements in the collinear AFM2 phase ($66 < T < 100\text{K}$) suggested that the magnetic excitation spectrum consists of propagating spin waves and diffuse spin fluctuations, originating from the presence of magnetic and nonmagnetic Mn sites within this phase [4]. In contrast INS measurements indicate that the non collinear AFM1 phase ($T < 66\text{K}$) consists only of propagating spin waves. An application of an external magnetic field in the AFM1 phase, restores the AFM2 phase and its associated spin fluctuations. Moreover, using density functional theory calculations we determined the magnetic exchange interactions of both AFM phases [6]. This provided the parameters for a Heisenberg model, from which we computed the spin-wave energies as a function of the external magnetic field. With this study we obtained the minimal magnetic model Hamiltonian and we investigated the role of the spin fluctuations in the AFM phases, and which Mn site may be responsible for them.

[1] S. Nakatsuji et al; Nature **527**, 212 (2015).

[2] N. Kiyohara et al; Phys. Rev. Applied **5**, 064009 (2016).

[3] M. Ikhlas et al; Nature Physics **13**, 1085 (2017).

[4] N. Biniskos et al; Physical Review Letters **120**, 257205 (2018).

[5] C. Sürgers et al; Nature Communications **5**, 3400 (2014).

[6] F.J. dos Santos et al; Phys. Rev. B **103**, 024407 (2021).

n.biniskos@fz-juelich.de

Local nuclear and magnetic order in the two-dimensional spin glass, $\text{Mn}_{0.5}\text{Fe}_{0.5}\text{PS}_3$

Jennifer N. GRAHAM^{1,2}, Matthew J. COAK³, Suhan SON^{4,5}, Emmanuelle SUARD¹, Je-Geun PARK^{4,5}, Lucy CLARK² and Andrew R. Wildes¹

¹Institut Laue-Langevin, Grenoble, France

²University of Birmingham, Department of Chemistry, Birmingham, United Kingdom

³University of Warwick, Department of Physics, Coventry, United Kingdom

⁴Institute for Basic Science, Seoul, Republic of Korea

⁵Seoul National University, Seoul, Republic of Korea

The MPS_3 compounds represent a diverse family of honeycomb layered van der Waals materials, where the physical properties are heavily reliant on the choice of transition metal ion, M [1]. These materials have been subject to significant interest over the years, for their ability to be intercalated or delaminated down to a monolayer, and have even been likened to magnetic graphene. In this study, we pay attention to the mixed compound, $\text{Mn}_{0.5}\text{Fe}_{0.5}\text{PS}_3$. Whilst a spin glass phase was known to exist in $\text{Mn}_{0.5}\text{Fe}_{0.5}\text{PS}_3$ [2] there are still a number of key details missing, in particular, the nature of its local nuclear and magnetic correlations. Here, we address these issues through a series of neutron scattering and magnetization measurements [3]. High resolution neutron powder diffraction data reveal a completely random distribution of magnetic ions throughout the honeycomb structure. Magnetization data confirm a spin glass phase, with the glass transition occurring at $T_g = 35$ K. Analysis of diffuse neutron scattering data show that within the honeycomb planes there are a mixture of satisfied and unsatisfied correlations, which we are able to explain by considering relationships between the magnetic structures of the two parent compounds. Correlations between the planes were found to be very weak, mirroring our observations of rod-like structures in single crystal diffraction measurements, and confirming that $\text{Mn}_{0.5}\text{Fe}_{0.5}\text{PS}_3$ is a near-ideal example of a two-dimensional magnetic material.

[1] F. Wang et al. Adv. Funct. Mater. **28**, 1802151 (2018), [2] T. Masubuchi et al. J. Alloys Compd. **460**, 668-674 (2007), [3] J. N. Graham et al. Phys. Rev. Mater **4**, 084401 (2020)

E-mail of the corresponding author: grahamj@ill.fr

MIEZE@RESEDA: Spin-echo optimized for magnetic phenomena

Johanna K. JOCHUM¹, Christian Franz^{1,2}, P. Bender¹, J. Leiner³, O. Soltwedel⁴, C. Fuchs¹,
P. Böni³, C. Pfleiderer³

¹Heinz Maier-Leibnitz Zentrum (MLZ), Technische Universität München, Garching,
Germany

²Jülich Centre for Neutron Science JCNS-MLZ, Forschungszentrum Jülich GmbH, Garching,
Germany

³Physik Department, Technische Universität München, Garching

⁴Institut für Physik Kondensierter Materie, Technische Universität Darmstadt, Darmstadt,
Germany

The MIEZE (Modulation of Intensity with Zero Effort) technique, is essentially a high-resolution, spin-echo, time-of-flight technique. In contrast to classical neutron spin-echo, all beam preparation and therefore all spin manipulation is done BEFORE the sample, opening up the possibility of introducing depolarizing conditions at the sample position. Therefore, magnetic or strongly incoherently scattering samples can easily be measured without loss of signal. Furthermore, it is possible to apply large magnetic fields at the sample position. In combination with the possibility of performing measurements in a SANS configuration this makes MIEZE an excellent tool for studying fluctuations at (quantum) phase transitions as well as other dynamic magnetic phenomena, such as magnon dynamics, or the melting of superconducting vortex lattices [1-4].

[1] C. Franz et al., Journal of the Physical Society of Japan 88, 8 (2019)

[2] Kindervater et al., PRB, 95, 014429 (2017)

[3] Säubert et al., PRB 99, 184423 (2019)

[4] J. Kindervater et al., Phys. Rev. X 9, 041059 (2019)

E-mail of the corresponding author: jjochum@frm2.tum.de

Data analysis of polarized neutron single crystal and powder diffraction

Iurii KIBALIN¹, Arsen GUKASOV¹

¹CEA Saclay, LLB, Gif-sur-Yvette, France

Based on experiment with single crystal the polarized neutron diffraction (PND) is a well-established tool to investigate the spin density distribution in the magnetic compounds with quenched orbital moment. For such compounds, it is assumed that the direction of the spins is aligned by an externally applied magnetic field. This collinearity of induced moments with a magnetic field breaks due to the presence of orbital moment. Under such circumstances, PND technique can be used to retrieve a local atomic susceptibility, which models orientation of the induced atomic moments as a function of the applied field. Recently, this approach has been extended to study the magnetic anisotropy in powders, which opens large possibilities in the studies of local anisotropy in highly interesting powder materials, like frustrated magnets, multiferroics, molecular magnets or nanoscale systems [1].

In the report, recent studies using the polarized neutron powder diffraction to analyze the local magnetic anisotropy are presented. By this technique the quasyplanar (XY) local anisotropy of Dy ions has been for the first time revealed in hyperkagome dysprosium garnet Dy₃Ga₅O₁₂ (Fig.1a) [2]. On an example of single-molecule magnet with Co(II) complex it was shown that the crystallites are oriented under a high external magnetic field (Fig.1b). Surprisingly, this effect improves the precision in the determination of the local susceptibility parameters in such a complex compound. Newly developed “CrysPy” library applied for the PND data analysis will be also presented (GitHub page is <https://ikibalin.github.io/cryspy/>).

[1] I.A. Kibalin, A. Gukasov. PRL, **1**, 033100 (2019).

[2] I.A. Kibalin et al. PRR, **2**, 033509 (2020).

E-mail of the corresponding author: iurii.kibalin@cea.fr

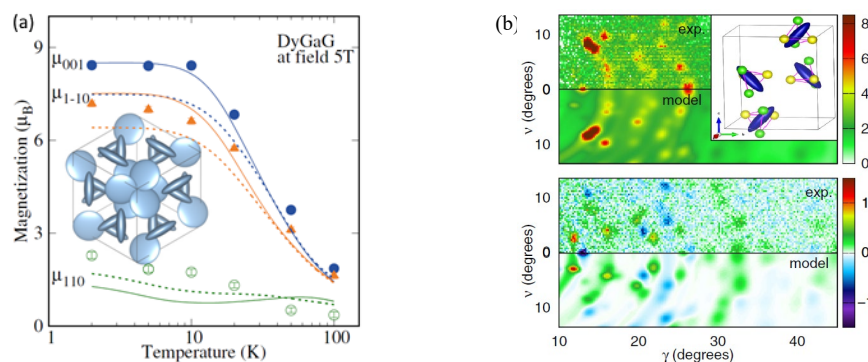


Fig.1: (a) Magnetization components versus temperature for DyGaG. Insets show magnetization ellipsoids. (b) The measured and calculated flipping sum (top) and difference (bottom) diffraction patterns collected on Co([CH₃)₂N]₂CS)₂Cl₂ at 2K, 5T.

Abstracts – Posters 1

Thursday, July 29th, 2021

9:00 – 10:00 AM EST

Multiferroics and Chirality

P1-1: Incommensurate Magnetic Phases of the Multiferroic Compound MnCr_2O_4 Described with the Superspace Formalism

Miguel PARDO-SAINZ, Ayaka TOSHIMA, Gilles ANDRÉ, Juan BASBUS, Gabriel CUELLO, Takashi HONDA, Toshiya OTOMO, Katsuya INOUE, Yusuke KOUSAKA, Javier CAMPO

Page 27

P1-2: Tuning magnetoelectricity by mixing magnetic anisotropies

Ellen FOGH, Bastian KLEMPKE, Manfred REEHUIS, Philippe BOURGES, Christof NIEDERMAYER, Sonja HOLM-DAHLIN, Mark LAVER, Sebastian PAECKEL André SOKOLOWSKI, Alexandre PAGES, David VAKNIN, Niels B. CHRISTENSEN and Rasmus TOFT-PETERSEN

Page 28

P1-3: ferroelectric polarization controlled magnetic reconfiguration in ultrathin $\text{La}_{0.67}\text{Sr}_{0.33}\text{MnO}_3$ films

Chao LIU, **Yaohua LIU**, Bangmin ZHANG, Cheng-Jun SUN, Da LAN, Pingfan CHEN, Xiaohan WU, Ping YANG, Xiaojiang YU, Timothy CHARLTON, Michael R. FITZSIMMONS, Jun DING, Jingsheng CHEN, Gan Moog CHOW

Page 29

Strongly Correlated Electron Systems

P1-5: Higher order magnetic scattering with Spherical Neutron Polarimetry

Jacob TOSADO, Wangchun CHEN, Efrain E. RODRIGUEZ

Page 30

P1-6: Putative spin-nematic phase in $\text{BaCdVO}(\text{PO}_4)_2$

M. SKOULATOS, H. GABOLD, G. BRANDL, F. RUCKER, G.J. NILSEN, A. BERTIN, E. POMJAKUSHINA, J. OLLIVIER, A. SCHNEIDEWIND, R. GEORGII, O. ZAHARKO, L. KELLER, Ch. RÜEGG, C. PFLEIDERER, B. SCHMIDT, N. SHANNON, A. KRIELE, A. SENYSHYN, A. SMERALD

Page 31

P1-7: Spin correlations in triangular dipole coupled Ising spin lattices

Petai PIP, **Artur GLAVIC**, Kirill ZHERNENKOV

Page 32

Quantum Materials

P1-8: Chirality preference deduced via polarized neutron diffraction in the centrosymmetric kagome helimagnet YMn_6Sn_6

Rebecca L. DALLY, Nirmal J. GHIMIRE, Dina MICHEL, Peter SIEGFRIED, Igor I. MAZIN, Jeffrey W. LYNN
Page 33

P1-9: Spin structure determination of the topological Weyl semi-metal candidates Mn_3Ge and Mn_3Sn

Youzhe CHEN, Jonathan Gaudet, Guy G. MARCUS, Taishi CHEN, Takahiro TOMITA, Muhammad IKHLAS, Yang ZHAO, Wangchun CHEN, Satoru NAKATSUJI, Collin L. BROHOLM
Page 34

P1-10: Polarized neutron diffraction of Hexagonal- $(\text{Mn}_{0.78}\text{Fe}_{0.22})_3\text{Ge}$

Venus RAI, Subhadip JANA, Shibabrata NANDI, Anne STUNAU, Jörg PERßON, Thomas BRÜCKEL
Page 35

Magnetic Nanomaterials

P1-11: Inverse proximity effects in superconductor/ferromagnet heterostructures: a study by GISANS with polarization analysis

Annika STELLHORN, Emmanuel KENTZINGER, Anirban SARKAR, Vitaliy PIPICH, Kathryn KRYCKA, Patrick SCHÖFFMANN, Tanvi BHATNAGAR-SCHÖFFMANN, Thomas BRÜCKEL
Page 36

P1-12: Revealing magnetic correlations close to quantum critical point in the disordered ferromagnetic alloys Ni-V with polarized SANS

Almut SCHROEDER, Shiva BHATTARAI, Hind ADAWI, Jean-Guy LUSSIER, and Kathryn KRYCKA
Page 37

Thin Films and Multilayers

P1-13: Magnetic structural analysis in $[\text{Fe}_3\text{Si}/\text{FeSi}_2]_{20}$ superlattice using polarized neutron reflectivity

Takayasu HANASHIMA, Jun-ichi SUZUKI, Kazuhisa KAKURAI, Noboru MIYATA, Ken-ichiro SAKAI, Hiroyuki DEGUCHI, Yoshiaki HARA, Satoshi TAKEICHI, and Tsuyoshi YOSHITAKE
Page 38

P1-14: Characteristics of the residual ferromagnetic ordering in the antiferromagnetic state of FeRh film

Sehwan SONG, Jiwoong KIM, Jisung LEE, Noboru Miyata, Neeraj KUMAR, Y. SOH, Brian J. KIRBY, Sungyun PARK
Page 39

P1-15: *In situ* polarized neutron reflectivity (*i*-PNR) in determining the evolving magnetic moments of Fe monolayers: a perspective w.r.t ex situ X-ray magnetic circular dichroism (XMCD)

Amitesh PAUL

Page 40

P1-16: Interfacial reconstruction in epitaxial CoFe₂O₄/α-Al₂O₃ thin-film systems

Detian YANG, Yu YUN, Chao LIU, Haile Arena AMBAYE, Timothy CHARLTON,

Yaohua LIU, Xiaoshan XU

Page 401

Polarized Neutron Instrumentation

P1-17: Beamlines for Polarized Neutron Development at the High Flux Isotope Reactor

Lowell CROW

Page 42

P1-18: KOMPASS – the polarized cold neutron triple-axis spectrometer at the FRM II

D. Gorkov, M. MÜLLER, G. WALDHERR, A. GRÜNWALD, J. STEIN, S. GIEMSA, P. BÖNI, and M. BRADEN

Page 43

P1-19: MARIA – The high-intensity polarized neutron reflectometer of JCNS – overview of current research and developments

Kirill ZHERNENKOV, Stefan MATTAUCH, Alexandros KOUTSIOUBAS, Sabine PÜTTER, Patrick Schöffmann, Amir Syed MOHD, Earl BABCOCK, Zahir SALHI, Alexander IOFFE, Thomas BRÜCKEL

Page 44

P1-20: QUOKKA, the Pinhole Monochromatic Small Angle Neutron Scattering (SANS) instrument for Magnetic Studies

Kathleen WOOD, Chun-Ming WU, Andrew MANNING and Elliot Paul GILBERT

Page 45

P1-21: Polarised neutrons for European Spallation Source instruments

Wai Tung LEE

Page 46

P1-22: Polarized instrumentation of the JCNS at the MLZ

Earl BABCOCK, Mikhail FEYGENSON, Artem FEOKTYSTOV, Christian FRANZ, Olaf HOLDERER, Vladimir HUTANU, Alexander IOFFE, Stefan MATTAUCH, Vitaliy PIPICH, Aurel RADULESCU, Zahir SALHI, Astrid SCHNEIDEWIND, Yixi SU, Egor VEZHLEV, Nicolo VIOLINI, Jörg VOIGT

Page 47

P1-23: QENS measurements with polarization analysis

Wangchun CHEN, Antonio FARAONE, Shannon WATSON, Yiming QIU, Jose RODRIGUEZ-RIVERA, M. NAGAO, Nicholas BUTCH, Craig BROWN

Page 48

Incommensurate Magnetic Phases of the Multiferroic Compound MnCr_2O_4 Described with the Superspace Formalism

Miguel PARDO-SAINZ^{1,2}, Ayaka TOSHIMA³, Gilles ANDRÉ⁴, Juan BASBUS⁵, Gabriel CUELLO⁶, Takashi HONDA⁷, Toshiya OTOMO⁷, Katsuya INOUE³, Yusuke KOUSAKA²,
*Javier CAMPO¹

¹Instituto de Nanociencia y Materiales de Aragón (INMA), Zaragoza, Spain

² Osaka Prefecture University, Sakai, Japan

³Chirality Research Center and Institute for Advanced Materials Research, Hiroshima, Japan

⁴Laboratoire Léon Brillouin, Saclay, France

⁵Centro Atómico Bariloche, S. C. de Bariloche, Argentina

⁶Institut Laue-Langevin, Grenoble, France

⁷Institute of Materials Structure Science, Tsukuba, Japan

Nowadays, chromium-based normal spinel oxides ACr_2O_4 are one of the most studied materials in the condensed matter community due to the interplay between its magnetic, electric and structural properties [1,2].

In particular, for MnCr_2O_4 , the ground state magnetic structure is still controversial because the magnetic structures reported by different groups and investigated by independent techniques are inconsistent [1-3].

The magnetic structure of this compound was reinvestigated by magnetization, specific heat and neutron diffraction experiments at different temperatures. The results suggested that a new magnetic phase, not previously reported, is developed under 18 K. The magnetic phases present in this sample were: ferrimagnetic order below $T_C = 45$ K; conical spin order with propagation vector $\vec{k}_{S1} = (0.62(1), 0.62(1), 0)$ below $T_{S1} = 20$ K; and conical spin order with propagation vector $\vec{k}_{S2} = (0.660(3), 0.600(1), 0.200(1))$ below $T_{S2} = 18$ K.

Using the superspace group approach [4], the symmetry of the nuclear and magnetic structures is determined. Through simple theoretical calculations, we derive the directions along which the electric polarization lies for each magnetic phase.

[1] K. Dey *et al.*, Journal of Magnetism and Magnetic Materials **435**, 15 (2017).

[2] K. Tomiyasu *et al.*, Phys. Rev. B **70**, 214434 (2004).

[3] J. M. Hastings and L. M. Corliss, Phys. Rev. **126**, 556 (1962).

[4] J. Rodríguez-Carvajal and J. Villain, Comptes Rendus Physique **20**, 770 (2019).

javier.campo@csic.es

Tuning magnetoelectricity by mixing magnetic anisotropies

Ellen FOGH^{1,2}, Bastian KLEMPKE³, Manfred REEHUIS³, Philippe BOURGES⁴, Christof NIEDERMAYER⁵, Sonja HOLM-DAHLIN⁶, Mark LAVER⁷, Sebastian PAECKEL³, André SOKOLOWSKI³, Alexandre PAGES², David VAKNIN⁸, Niels B. CHRISTENSEN¹ and Rasmus TOFT-PETERSEN

¹ Department of Physics, Technical University of Denmark, DK-2800 Kongens Lyngby, Denmark

² Laboratory for Quantum Magnetism, Institute of Physics, École Polytechnique Fédérale de Lausanne (EPFL), CH-1015 Lausanne, Switzerland

³ Helmholtz-Zentrum Berlin für Materialien und Energie, D-14109 Berlin, Germany

⁴ Laboratoire Léon Brillouin, CEA-CNRS, CEA-Saclay, F-91191 Gif-sur-Yvette, France

⁵ Laboratory for Neutron Scattering and Imaging, Paul Scherrer Institute, Villigen CH-5232, Switzerland

⁶ Nano-Science Center, Niels Bohr Institute, University of Copenhagen, DK-2100 Copenhagen Ø, Denmark

⁷ School of Metallurgy and Materials, University of Birmingham, Birmingham B15 2TT, United Kingdom

⁸ Ames Laboratory and Department of Physics and Astronomy, Iowa State University, Ames, Iowa 50011

The ability to control magnetic and electric properties is attractive for tailoring materials for devices, data storage and sensor technology. In the so-called magnetoelectric (ME) materials, these two degrees of freedom are closely linked and this makes them particularly interesting [1]. Here we study one such system, $\text{LiNi}_{1-x}\text{Fe}_x\text{PO}_4$, using magnetometry, polarized neutron diffraction, pyrocurrent measurements and Monte Carlo simulations. The parent compounds of this mixed system, LiNiPO_4 and LiFePO_4 , possess mismatched magnetic anisotropies and we demonstrate that by random magnetic anisotropy mixing it is possible to tune the magnetic and ME properties. Interestingly, the major spin component in the groundstate is along an intermediate anisotropy axis which is perpendicular to the plane spanned by the easy axes of the parent compounds. Such behavior was previously predicted with mean-field calculations and our study provides the first clear experimental evidence for such phase. The consequent lowering of the magnetic symmetry unlocks additional ME couplings in the system. Most remarkably, we observe that the ME coupling strength may be enhanced by up to two orders of magnitude.

[1] W. Eerenstein, N. D. Mathur and J. F. Scott, *Nature* **442**, 759–765 (2006)

E-mail of the corresponding author: ellen.fogh@epfl.ch

**ferroelectric polarization controlled magnetic reconfiguration in ultrathin
 $\text{La}_{0.67}\text{Sr}_{0.33}\text{MnO}_3$ films**

Chao LIU^{1,2}, Yaohua LIU^{*2}, Bangmin ZHANG³, Cheng-Jun SUN⁴, Da LAN¹, Pingfan CHEN¹, Xiaohan WU¹, Ping YANG⁵, Xiaojiang YU⁵, Timothy CHARLTON², Michael R. FITZSIMMONS², Jun DING¹, Jingsheng CHEN¹, Gan Moog CHOW^{1**}

¹National University of Singapore, Singapore,


²Oak Ridge National Laboratory, Oak Ridge, TN, USA,

³Sun Yat-Sen University, Guangzhou, Guangdong, China,

⁴Argonne National Laboratory, Argonne, IL, USA,

⁵Singapore Synchrotron Light Source, Singapore

Multiferroic oxide heterostructures consisting of ferromagnetic and ferroelectric components hold the promise for nonvolatile magnetic control via ferroelectric polarization, advantageous for the low-dissipation spintronics. Modern understanding of the magnetoelectric coupling in these systems involves structural, orbital, and magnetic reconstructions at interfaces. Previous works have long proposed polarization-dependent interfacial magnetic structures; however, direct evidence is still missing, which requires advanced characterization tools with near-atomic-scale spatial resolutions. Here, extensive polarized neutron reflectometry (PNR) studies have determined the magnetic depth profiles of $\text{PbZr}_{0.2}\text{Ti}_{0.8}\text{O}_3/\text{La}_{0.67}\text{Sr}_{0.33}\text{MnO}_3$ (PZT/LSMO) bilayers with opposite self-polarizations. When the LSMO is 2–3 nm thick, the bilayers show two magnetic transitions on cooling. However, temperature-dependent magnetization is different below the lower-temperature transition for opposite polarizations. PNR finds that the LSMO splits into two magnetic sublayers, but the inter-sublayer magnetic couplings are of opposite signs for the two polarizations. Near-edge X-ray absorption spectroscopy further shows contrasts in both the Mn valences and the Mn–O bond anisotropy between the two polarizations. This work completes the puzzle for the magnetoelectric coupling model at the PZT/LSMO interface, showing a synergic interplay among multiple degrees of freedom toward emergent functionalities at complex oxide interfaces.

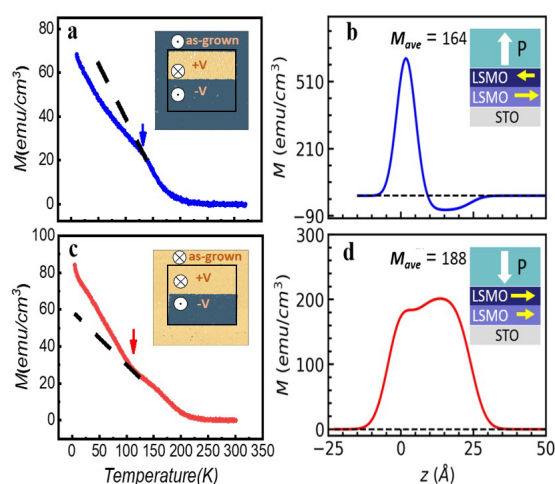

[1] C. Liu *et al.*, ACS Appl. Mater. Interfaces, <https://doi.org/10.1021/acsami.1c02300>, (2021).

E-mail of the corresponding author: *yhliu@ornl.gov, **msecgm@nus.edu.sg

Higher order magnetic scattering with Spherical Neutron Polarimetry

Jacob TOSADO¹, Wangchun CHEN², Efrain E. RODRIGUEZ³

¹Oak Ridge National Laboratory, Oak Ridge TN, USA

²NIST Center for Neutron Research, Gaithersburg MD, USA

³University of Maryland, College Park MD, USA

Complex magnetic systems can be understood through the multipole expansion. In so doing, a magnetic system may then be conceptualized in terms of monopole, quadrupole, and torodapole moments that can each be distinguished by their respective symmetry. We will discuss the possibility of measuring these higher order moments using a polarized neutron scattering technique known as spherical neutron polarimetry. This technique both controls and measures the full three-dimensional neutron polarization to yield a magnetic property tensor of a material system. We will outline a novel approach for analyzing these Q-dependent tensors, demonstrating state-of-the-art calibration and visualization techniques.

E-mail of the corresponding author: tosadoja@ornl.gov

Putative spin-nematic phase in BaCdVO(PO₄)₂

M. Skoulatos¹, H. Gabold¹, G. Brandl², F. Rucker³, G.J. Nilsen⁴, A. Bertin⁵, E. Pomjakushina⁶, J. Ollivier⁷, A. Schneidewind², R. Georgii¹, O. Zaharko⁸, L. Keller⁸, Ch. Rüegg⁹, C. Pfleiderer³, B. Schmidt¹⁰, N. Shannon¹¹, A. Kriele¹², A. Senyshyn¹, A. Smerald¹³

¹MLZ and Physics Department, Technical University Munich, Germany

²Jülich Centre for Neutron Science JCNS at MLZ, Garching, Germany

³Physics Department E51, Technische Universität München, Germany

⁴ISIS Neutron and Muon Facility, Rutherford Appleton Lab, UK

⁵Institut für Festkörperphysik, TU Dresden, Germany

⁶Laboratory for Multiscale Materials Experiments, PSI, Switzerland

⁷Institut Laue-Langevin, 6 rue Jules Horowitz, Grenoble, France

⁸Laboratory for Neutron Scattering and Imaging, PSI, Switzerland

⁹Quantum Criticality and Dynamics Group, PSI, Switzerland

¹⁰Max Planck Institute for the Chemical Phys. of Solids, Dresden, Germany

¹¹Okinawa Institute of Science and Technology, Japan

¹²GEMS at MLZ, Helmholtz-Zentrum Hereon, Garching, Germany

¹³Max Planck Institut für Festkörperforschung, Stuttgart, Germany

We report neutron scattering and AC magnetic susceptibility measurements of the 2D spin-1/2 frustrated magnet BaCdVO(PO₄)₂ [1]. At temperatures well below $T_N \approx 1\text{K}$, we show that only 34% of the spin moment orders in an up-up-down-down strip structure. Dominant magnetic diffuse scattering and comparison to published μsr measurements indicates that the remaining 66% is fluctuating. This demonstrates the presence of strong frustration, associated with competing ferromagnetic and antiferromagnetic interactions, and points to a subtle ordering mechanism. On applying magnetic field, we find that at $T = 0.1\text{K}$ the magnetic order vanishes at 3.78T, whereas magnetic saturation is reached only above 4.5T. We argue that the putative high-field phase is a realization of the long-sought bond-spin-nematic state.

[1] M. Skoulatos et al., Phys. Rev. B **100**, 014405 (2019).

E-mail of the corresponding author: markos.skoulatos@frm2.tum.de

Spin correlations in triangular dipole coupled Ising spin lattices

Petai PIP¹, Artur GLAVIC², Kirill ZHERNENKOV³

¹Laboratory for Mesoscopic Systems, Department of Materials, ETH Zurich, 8093 Zurich, Switzerland and Laboratory for Multiscale Materials Experiments, Paul Scherrer Institut, 5232 Villigen PSI, Switzerland

²Laboratory for Neutron and Muon Instrumentation, Paul Scherrer Institut, 5232 Villigen PSI, Switzerland

³Jülich Centre for Neutron Science at Heinz Maier-Leibnitz Zentrum, Forschungszentrum Jülich GmbH, 85748 Garching, Germany

Ising spins on a triangular lattice are the textbook example for magnetic frustration that leads to a highly degenerate ground state. When the magnetic moments (or super-spins) are influenced not only to their nearest neighbor, as in a dipole-coupled system, the ground state can no longer be derived analytically. Monte-Carlo simulations of such systems show liquid behavior and a stripe magnetic order ground state at low temperatures [1]. The character of the magnetic phases and the ordering temperature was found to change when compressing the lattice in one direction, making the magnetic coupling asymmetric and reducing the frustration. While there are many simulations of such systems available it is challenging to manufacture and experimentally investigate the physics that occurs on the nanometer scale.

We have used samples of permalloy cylinders on a symmetric and 10% distorted lattice that were fabricated with electron beam lithography to physically implement the theoretical example. The shape anisotropy of the cylinders is out-of-plane and locks the single domain magnets (around 35 nm diameter) to behave Ising-like. To investigate the magnetic structure, we used Grazing Incidence Small Angle Scattering (GISANS) on the MARIA beamline at MLZ [2] with polarization analysis. With the high structural quality, single super-crystal samples we managed to measure diffuse magnetic scattering for the two samples. Magnetic correlations were short range and there was a clear difference between symmetric and distorted lattice.

For quantitative analysis of the magnetic structure factor in our samples we used the Distorted Wave Born Approximation as implemented in BornAgain [3] and extended it with a custom structure factor model that empirically describe the short-range correlations modeled with the Monte-Carlo simulations [1]. With a single fit parameter of reduced temperature (normalized by coupling energy) we can well replicate the measured magnetic scattering on the Yoneda line in two independent directions.

[1] A. Smerald and F. Mila, SciPost Phys. **5**, 30 (2018).

[2] P. Pip, A. Glavic, S. H. Skjærvø, A. Weber, A. Smerald, K. Zhernenkov, N. Leo, F. Mila, L. Philippe, and L. J. Heyderman, Nanoscale Horizons **6**, 474-481 (2021)

[3] G. Pospelov, W. Van Herck, J. Burle, J. M. Carmona Loaiza, C. Durniak, J. M. Fisher, M. Ganeva, D. Yurov, and J. Wuttke, Journal of Applied Crystallography **53**, 1 (2020).

E-mail of the corresponding author: artur.glavic@psi.ch

Chirality preference deduced via polarized neutron diffraction in the centrosymmetric kagome helimagnet YMn₆Sn₆

Rebecca L. Dally¹, Nirmal J. Ghimire^{2,3}, Dina Michel^{2,3}, Peter Siegfried^{2,3}, Igor I. Mazin^{2,3}, Jeffrey W. Lynn¹

¹ NIST Center for Neutron Research, National Institute of Standards and Technology, Gaithersburg, MD 20899, USA

² Department of Physics and Astronomy, George Mason University, Fairfax, VA 22030, USA

³ Quantum Science and Engineering Center, George Mason University, Fairfax, VA 22030, USA

YMn₆Sn₆ exhibits topologically protected characteristics which are uncommon given the underlying centrosymmetric crystal lattice (*P6/mmm*). The crystal structure comprises Mn atoms on a kagome lattice in the *ab*-plane, which are then stacked along the *c*-axis with the layers separated either by three Sn layers or a mixed Y and Sn layer. Mn atoms in-plane are at equivalent positions and are strongly coupled ferromagnetically via nearest neighbor exchange and have the spins in the *ab*-plane due to easy-plane anisotropy. This stacking pattern has an important magnetic implication, mainly, that within a unit cell there are two unequal interlayer exchange pathways with opposite signs. A short-lived commensurate collinear antiferromagnetic phase, with an onset of $T_N \sim 340$ K, transitions below 333 K to an incommensurate double-flat-spiral magnetic structure due to the exchange competition. At elevated temperatures and modest in-plane magnetic fields, a topological Hall effect (THE) emerges [1, 2] despite a null scalar spin chirality; dynamic chiral fluctuations are thought to be responsible, thus making YMn₆Sn₆ a prototype material for a fluctuation based THE mechanism. [1] Here, we present results obtained via a polarized neutron diffraction study. [3] Unexpectedly, unequal chiral domain populations of the zero-field spiral state were found despite the underlying centrosymmetric crystal symmetry. This could be a significant finding as it implies that the spiral state can energetically favor one domain over the other, possibly in a controlled manner. This is another example, along with the THE, of YMn₆Sn₆ displaying unusual behavior for a structure with inversion symmetry.

[1] N. J. Ghimire et al., Sci. Adv., **6**, eabe2680 (2020).

[2] Q. Wang, et al., Phys. Rev. B, **103**, 014416 (2021).

[3] R. L. Dally et al., Phys. Rev. B, **103**, 094413 (2021).

E-mail of the corresponding author: rebecca.dally@nist.gov

Spin structure determination of the topological Weyl
semi-metal candidates Mn_3Ge and Mn_3Sn

Youzhe CHEN¹, **Jonathan Gaudet**^{1,2,3}, Guy G. MARCUS¹, Taishi CHEN⁴, Takahiro TOMITA⁴, Muhammad IKHLAS⁴, Yang ZHAO^{2,3}, Wangchun CHEN²,
Satoru NAKATSUJI^{1,4}, Collin L. BROHOLM^{1,2}

¹Institute for Quantum Matter and Department of Physics and Astronomy, Johns Hopkins University, Baltimore, MD 21218, USA

²NIST Center for Neutron Research, National Institute of Standards and Technology, Gaithersburg, MD 20899, USA

³Department of Materials Science and Engineering, University of Maryland, College Park, Maryland 20742, USA

⁴Institute for Solid State Physics, University of Tokyo, Kashiwa, Chiba 277-8581, Japan

The recent discovery of anomalous Hall effect in Mn_3X ($\text{X}=\text{Sn}, \text{Ge}$) suggests the existence of Weyl nodes in the electronic band structure of these non-collinear antiferromagnets [1,2]. The details of the magnetic structure of Mn_3X are crucial to Weyl physics, but are still under debate due to the lack of experimental studies. Here, we report polarized neutron diffraction studies on Mn_3X , which provide crucial information on their magnetic structure. In Mn_3Ge , a 2D $\mathbf{k} = 0$ anti-chiral spin structure was determined [3], which naturally explains the origin of a net in-plane magnetization along the [110] direction. In Mn_3Sn , concomitant with the disappearance of the anomalous Hall effect, an additional magnetic phase was discovered at low temperature for which our polarization analysis reveals both an in-plane and an out-of-plane incommensurate spin component [4]. The magnetic ground state selection of Mn_3X will be discussed in terms of long-range exchange, Dzyaloshinskii-Moriya, and crystal electric field interactions.

[1] E. Liu et al., Nat. Phys., **14**, 1125 (2018).

[2] S. Nakatsuji et al., Nature, **527**, 212 (2015).

[3] Y. Chen et al., Phys. Rev. B, **102**, 054403 (2020).

[4] Y. Chen et al., To be published (2021)

E-mail of the corresponding author: jonathan.gaudet@nist.gov

Polarized neutron diffraction of Hexagonal-(Mn_{0.78}Fe_{0.22})₃Ge

Venus RAI¹, Subhadip Jana¹, Shibabrata Nandi¹, Anne Stunault², Jörg Perßon¹, Thomas Brückel¹

¹*Jülich Centre for Neutron Science JCNS and Peter Grünberg Institute PGI, JARA-FIT, Forschungszentrum Jülich GmbH, D-52425 Jülich, Germany*

²*Institut Laue-Langevin, 71 avenue des Martyrs, CS20156, 38042 Grenoble Cedex 9, France*

Topological quantum materials have attracted enormous attention since their discovery due to the observed anomalous transport effects (ATE), which originate from the non-zero Berry curvature. Mn₃Ge has gained special attention because anomalous transport effects can be studied below the Néel temperature (365 K), down to 2 K [1]. Since ATE emerge from the robust topological band structure, it is interesting to study the effects of Fe doping on ATE in (Mn_{1-x}Fe_x)₃Ge. Our transport measurements show the existence of an anomalous Hall effect (AHE) in the intermediate temperature range for the 22% Fe doped sample. However, the origin of the AHE cannot be attributed to Weyl points without knowledge of the ground state magnetic structure of doped samples. Therefore, we have performed polarized neutron diffraction from the (Mn_{0.78}Fe_{0.22})₃Ge sample using the D3 CRYOPAD setup at ILL, France. Our analysis concludes that the magnetic structure of the 22% Fe doped sample remains the same as Mn₃Ge in the temperature range where AHE is observed. This suggests that the physics behind AHE observed in doped samples is most likely the same as in Mn₃Ge. Therefore, it can be argued that the Weyl Fermions do not vanish by suitable doping of the sample, as long as the magnetic structure of the doped samples remains the same.

References:

[1] A. K. Nayak, J. E. Fischer, Y. Sun, B. Yan, J. Karel, A. C. Komarek, C. Shekhar, N. Kumar, W. Schnelle, J. Kübler, C. Felser, and S. S. P. Parkin, *Sci. Adv.* **2**, e1501870 (2016).

[2] T. Hori, Y. Yamaguchi, and Y. Nakagawa, *J. Magn. Magn. Mater.* **104**, 2045 (1992).

E-mail: v.raai@fz-juelich.de

**Inverse proximity effects in superconductor/ferromagnet heterostructures:
a study by GISANS with polarization analysis**

Annika STELLHORN¹, Emmanuel KENTZINGER¹, Anirban SARKAR¹, Vitaliy PIPICH³,
Kathryn KRYCKA⁴, Patrick SCHÖFFMANN¹, Tanvi BHATNAGAR-SCHÖFFMANN^{1,2},
Thomas BRÜCKEL¹

¹Jülich Centre for Neutron Science (JCNS) and Peter Grünberg Institut (PGI), JARA-FIT,
Forschungszentrum Jülich GmbH, 52425 Jülich, Germany

²Ernst Ruska-Centre for Microscopy and Spectroscopy with Electrons and Peter Grünberg
Institute (PGI-5), Forschungszentrum Jülich GmbH, 52425 Jülich, Germany

³Jülich Centre for Neutron Science (JCNS) at Heinz Maier-Leibnitz Zentrum (MLZ),
Forschungszentrum Jülich GmbH, Lichtenbergstraße 1, 85748 Garching, Germany

⁴National Institute of Standards and Technology, Gaithersburg, Maryland 20899, USA

Proximity effects in superconductor(S)/ferromagnet(F) heterostructures with perpendicular magnetic anisotropy can manifest in various forms such as domain-wall-superconductivity [1] and the generation of long-ranged spin-triplet Cooper pairs [2]. Understanding the origin of such phenomena is the key for an application in fluxonic devices and in spintronics, respectively [3, 4]. Especially a modification of the ferromagnetic domain structure by the onset of superconductivity is barely studied, due to only small variations of the ferromagnetic state with much higher Curie temperature compared to the critical temperature of BCS superconductors.

Grazing-Incidence Small-Angle Neutron Scattering (GISANS) with polarization analysis is the method of choice to study depth-resolved lateral magnetic structures on the mesoscopic length-scale, and enables to investigate the proximity effects in S/F systems with high sensitivity to changes in the magnetic orientation of the ferromagnetic domain pattern.

This work presents a combined study of the macroscopic superconducting and ferromagnetic parameters, and a mesoscopic investigation of the lateral magnetic depth-profile as function of temperature in a model system of Nb(S)/FePd(F) grown by molecular beam epitaxy.

[1] Z. Yang et al., Nature materials, **3**, 793-798 (2004).

[2] F. S. Bergeret et al., Physical Review Letters, **86**, 4096-4099-798 (2001).

[3] A. M. Kadin, Journal of Applied Physics, **68**, 5741, (1990).

[4] J. Linder and J. W. A. Robinson, Nature Physics, **11**, 307-315, (2015).

E-mail of the corresponding author: a. stellhorn@fz-juelich.de

Revealing magnetic correlations close to quantum critical point in the disordered ferromagnetic alloys Ni-V with polarized SANS

Almut Schroeder¹, Shiva Bhattarai¹, Hind Adawi¹, Jean-Guy Lussier¹, and Kathryn Krycka²

¹ Kent State University, Department of Physics, Kent, OH, US

² NIST Center of Neutron Research, Gaithersburg, MD, US

We present a small-angle neutron scattering (SANS) analysis of the alloy $\text{Ni}_{1-x}\text{V}_x$ with random atomic distribution [1] where the ferromagnetic (FM) order is destroyed towards a paramagnetic phase by sufficient substitution of Ni by V. The critical temperature T_c vanishes at $x_c = 0.116$ indicating a quantum critical point (QCP) with signatures of disorder [1]. We collected full polarized SANS data on different $\text{Ni}_{1-x}\text{V}_x$ polycrystalline samples close to x_c (with $T_c < 50\text{K}$) at NG7SANS, NCNR, NIST utilizing a ^3He cell within the wave vector regime $Q = 0.06\text{-}1\text{nm}^{-1}$. Through the angular dependence of the different magnetic cross sections with the magnetic field transverse to the beam we succeed to resolve the small magnetic scattering at diverse length scales within the FM state well below T_c [2]. Besides isotropic magnetic short-range correlations that remain at very low temperatures we find an anisotropic magnetic contribution that reveals large scale magnetic domains below T_c . High field data support the coexistence of short-range fluctuations and long-range order. In addition, we notice local magnetic defects that relate to the V concentration. The polarized SANS study reveals how these different contributions evolve with V concentration x , characterizing a disordered FM alloy, close to the QCP.

This research is supported by ICAM and used resources at NIST provided by the CHRNS (through partnership of NIST and NSF). H.A. acknowledges support from Jazan University.

[1] R. Wang et al, Phys. Rev. Lett. **18**, 267202 (2017)

[2] A. Schroeder et al, AIP Advances **10**, 015036 (2020)

E-mail of the corresponding author: aschroe2@kent.edu

**Magnetic structural analysis in $[\text{Fe}_3\text{Si}/\text{FeSi}_2]_{20}$ superlattice
using polarized neutron reflectivity**

Takayasu HANASHIMA¹, Jun-ichi SUZUKI¹, Kazuhisa KAKURAI^{1,2}, Noboru MIYATA¹,
Ken-ichiro SAKAI³, Hiroyuki DEGUCHI⁴, Yoshiaki HARA⁵, Satoshi TAKEICHI⁶, and
Tsuyoshi YOSHITAKE⁶

¹Neutron Science and Technology Center, CROSS, Ibaraki, Japan

²RIKEN Center for Emergent Matter Science (CEMS), Saitama, Japan.

³National Institute of Technology (KOSEN), Kurume College, Fukuoka, Japan

⁴Faculty of Engineering, Kyushu Institute of Technology, Fukuoka, Japan

⁵National Institute of Technology (KOSEN), Ibaraki College, Ibaraki, Japan

⁶Kyushu University, Fukuoka, Japan

We report the temperature dependence of in-plane magnetic structures of $[\text{Fe}_3\text{Si}/\text{FeSi}_2]_{20}$ superlattice in the applied in-plane magnetic field. The macroscopic magnetization measurements on the superlattice reveals an anomalous decrease of the magnetization at low temperatures for the applied in-plane magnetic fields below 3 Tesla. For example, at 1 Tesla, the magnetization decrease anomalously for temperatures $T < 250$ K. Polarized neutron reflectivity measurements under an applied field of 1 Tesla clarify that non-collinear ferromagnetic structures with a transverse antiferromagnetic order are induced at low temperatures below 240 K. These low-temperature structures are characterized by the symmetric and alternate tilting of the Fe_3Si layer magnetization to the in-plane magnetic field direction separated through non-magnetic spacer layers of FeSi_2 . The tilting angle increases with decreasing temperature causing the anomalous decrease of the magnetization. Above 240 K, the moments are aligned ferromagnetically along the applied field. Figure 1 shows each magnetic structures. Due to the semi-conducting property of the non-magnetic FeSi_2 space layer, as the temperature decreases, the biquadratic interlayer coupling term J_2 becomes relatively stronger than the bilinear interlayer coupling term J_1 . This might explain the temperature-dependent non-collinear magnetic structures in this magnetic metal/non-magnetic semiconductor superlattice and its anomalous magnetization behaviors at low temperatures.

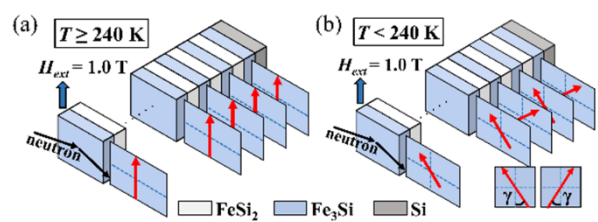


Fig 1. (a) Schematic figure of collinear ferromagnetic structure of $\text{Fe}_3\text{Si}/\text{FeSi}_2$ superlattice, and (b) one of non-collinear ferromagnetic structure with transverse anti-ferromagnetic order.

E-mail of the corresponding author: t_hanashima@cross.or.jp

Characteristics of the residual ferromagnetic ordering in the antiferromagnetic state of FeRh film

Sehwan SONG¹, Jiwoong KIM¹, Jisung LEE², Noboru Miyata³, Neeraj KUMAR⁴, Y. SOH⁴
Brian J. KIRBY⁵, Sungkyun PARK^{1,*}

¹Department of Physics, Pusan National University, Busan 46241, Korea

²Center for Scientific Instrumentation, Korea Basic Science Institute, Daejeon 34133, Korea

³Neutron Science and Technology Center, Compressive Research Organization for Science and Society, 162-1 Shirakata, Tokai, Naka, Ibaraki 319-1106, Japan

⁴Paul Scherrer Institute, 5232 Villigen, Switzerland

⁵NIST Center for Neutron Research, National Institute Standard & Technology, Gaithersburg, MD 20878, USA

B2-phase FeRh shows metamagnetic first-order phase transition from antiferromagnetic to ferromagnetic above 370 K[1]. The transition shows a volume expansion of about 1% and variation of electrical resistivity due to the increasing density-of-state at the Fermi level [2, 3]. Unlike bulk, unexpected ferromagnetic (FM) characteristics have been observed in a thin-film form [4].

This presentation shows the detailed origin of the residual FM state by examining temperature-dependent physical properties. First, the residual ferromagnetic induce thermomagnetic irreversibility (e.g., spin-glass-like behavior) and negative magnetoresistance. Second, the non-uniform distribution of the magnetic profile at low temperature (i.e., below the transition temperature) is observed from the temperature-dependent polarized neutron reflectometry. Interestingly, the bottom and top interfaces exhibit an FM state while the middle region is an AFM state. Furthermore, the bottom (top) interface shows a temperature-independent (-dependent) FM state, indicating that the FM origin of the interface between substrate and film (bottom interface) and capping layer (Al) and film (top interface) are due to structural distortion and Fe-defect state, respectively.

[1] J.S. Kouvel et al., Journal of Applied Physics, **33**, 1343 (1962).

[2] E.E. Fullerton et al., Nature Communication, **7**, 13113 (2016).

[3] S. Mankovsky et al., Physical Review B, **95**, 155139 (2017).

[4] C.W. Barton et al., Scientific Report, **7**, 44397 (2017).

E-mail of the corresponding author: psk@pusan.ac.kr

***In situ* polarized neutron reflectivity (*i*-PNR) in determining the evolving magnetic moments of Fe monolayers:
a perspective w.r.t ex situ X-ray magnetic circular dichroism (XMCD)**

Amitesh PAUL

Guangdong Technion-Israel Institute of Technology, Shantou 515063, Guangdong, China

We have combined two complementary techniques, element sensitive ex situ X-ray magnetic circular dichroism (XMCD) and in situ polarized neutron reflectivity (*i*-PNR), to determine the values of evolving magnetic moments obtained from a low symmetry system of hetero-epitaxial Fe monolayers (MLs), as a function of thickness [1].

The samples were grown by magnetron sputtering on face-centered-cubic (fcc) Cu(001)/Si(001). Within experimental errors, we found a corroboration of the modulated moments from the XMCD and of the magnetic anisotropies from magnetization measurements with those obtained earlier from layer-by-layer *i*-PNR measurements. The modulation was attributed to initial island-like growth morphology assisted monolayer-magnetism during sputtering. Furthermore, analyzing the depth sensitive *i*-PNR profile of a bulk-like film, we developed a model characterized by monotonic magnetism involving collinear spins. The model is further described by a higher magnetization for the deeper layers, which decreases gradually for the upper layers before attaining saturation at its bulk value within a few MLs. This model contradicts the earlier proposed non-collinear model involving antiferromagnetic units, thus clarifying the long-standing ambiguity in the coverage regime. The results have been compared with those existing, following the theoretical parameterized tight-binding model with satisfactory agreement.

This study distinguishes the variation of monolayer-magnetism owing to the growth morphology from the layer-by-layer investigation vis-à-vis depth-profiling of bulk-like film. At the same time, it also promises the general possibility of depth-profiling using *i*-PNR in other complex multilayered systems on high flux neutron sources.

[1] A. Paul, Journal of Magnetism and Magnetic Materials, 505, 166701(2020).

E-mail of the corresponding author: amitesh.paul@gtiit.edu.cn

Interfacial reconstruction in epitaxial CoFe₂O₄/α-Al₂O₃ thin-film systems

**Detian YANG¹, Yu YUN¹, Chao LIU^{2,3}, Haile Arena AMBAYE², Timothy CHARLTON²,
Yaohua LIU^{2,4}, Xiaoshan XU^{1,5*}**

¹ Department of Physics and Astronomy, University of Nebraska, Nebraska, USA

² Neutron Scattering Division, Oak Ridge National Laboratory, Tennessee, USA

³ Department of Materials Science and Engineering, National University of Singapore, Singapore

⁴ Second Target Station, Oak Ridge National Laboratory, Oak Ridge, Tennessee, USA

⁵ Nebraska Center for Materials and Nanoscience, University of Nebraska, Nebraska, USA

Oxide interfaces, characterized by the distinctively strong interaction and reconstruction among charge, spin, orbital and structural degrees of freedom, have served as versatile platforms to study emergent novel states and phenomena in the last decade. Spinel oxides are natural candidates for studies on interfacial emergent phenomena, because their inter-site cation migration, potentially as the driving force for interfacial reconstruction, can be enhanced if parameters such as temperature and lattice constants are adjusted. Among them, inverse spinel CoFe₂O₄, of large magnetocrystalline anisotropy, superior mechanic hardness and excellent physical and chemical stability, has been widely studied and applied in high-density magnetic storage, magnetoelectric transducers and spin filters. And CoFe₂O₄ films of (111) normal direction can be epitaxially grown on α-Al₂O₃ (0001) substrates of the rhombohedral corundum structure. The large difference in crystal structures and lattice parameters between these two materials implies potential strong interfacial reconstruction. Here we report an interfacial layer potentially dominated by CoO/FeO formed between CoFe₂O₄ thin films and sapphire substrates corroborated by the analysis of structure and magnetism.

We have epitaxially grown CoFe₂O₄ (111) films on Al₂O₃ (0001) substrates by pulsed laser deposition [1]. X-ray and reflection high-energy electron diffraction (RHEED) demonstrate an interfacial layer of a different crystal structure from the “bulk” part of the CoFe₂O₄ film. As a result of this interfacial reconstruction, colossal intrinsic exchange bias up to 7 ± 2 kOe was observed, whose interfacial origin is indicated by the power-law thickness-dependence relation of exchange bias. The temperature dependence of exchange bias reveals the exchange interaction between the interfacial layer and the ferrimagnetic CoFe₂O₄ disappear at about 250K, close to the Néel temperature of CoO (~290 K) and FeO (~190 K). And the lattice constant of the interfacial layer extracted from thickness-resolved RHEED patterns matches those of CoO and FeO. X-ray reflection and polarized neutron reflection data further support the emergence of the interfacial layer and imply the complexity of the interfacial components and the mechanism of interfacial reconstruction. This work suggests a path for enhancing intrinsic exchange bias using a combination of film and substrate of large structural differences, highlighting the role of interfacial atomic and electronic reconstructions.

[1]D. Yang, *et al.*, Phys. Rev. B 103, 224405 (2021).

[*xiaoshan.xu@unl.edu](mailto:xiaoshan.xu@unl.edu)

Beamlines for Polarized Neutron Development at the High Flux Isotope Reactor

Lowell CROW¹

¹Neutron Technologies Division, Oak Ridge National Laboratory, Bldg. 8600, MS 6476, Oak Ridge, TN 37831, USA

At Oak Ridge National Laboratory, the neutron optics and polarization group currently operates two development beamlines at the High Flux Isotope Reactor (HFIR).

The newest is the "Larmor" cold neutron polarization development beamline at the CG4B guide position, commissioned in 2018. The first experiment on this beamline imaged He ions in turbulent flow. More recent measurements include tests of resonant spin echo with superconducting rf flippers, and quantum entanglement using Wollaston prisms. We also tested new apparatus for spherical polarimetry.

The HB-2D polarized beamline in the beam room has also hosted many prototypes and components. These beamlines provide necessary resources for instrumentation development at both the Spallation Neutron Source and HFIR, as well as technique demonstration for future instruments.

In about 2024, HFIR will be shut down for replacement of its permanent beryllium reflector, which will necessitate removal of the instruments. This offers an opportunity to replace many instruments, and planning is in progress for the future development positions.

E-mail of the corresponding author: crowmljr@ornl.gov

KOMPASS – the polarized cold neutron triple-axis spectrometer at the FRM II

D. Gorkov^{1,2,3}, M. Müller^{1,2}, G. Waldherr², A. Grünwald^{1,2,3}, J. Stein¹, S. Giemsa³,
P. Böni³, and M. Braden¹

¹University of Cologne, Institute of Physics II, Cologne, Germany

² Technical University Munich, Heinz Maier-Leibnitz Zentrum (MLZ), Garching, Germany.

³ Physics-Department E21, Technical University Munich, Garching, Germany



KOMPASS is a polarized cold-neutron three axes spectrometer (TAS) currently undergoing its final construction phase at the MLZ in Garching. The instrument is designed to exclusively work with polarized neutrons and optimized for zero-field spherical neutron polarization analysis for measuring all elements of the polarization matrix. In contrast to other TASs, KOMPASS is equipped with a unique polarizing guide system. The static part of the guide system hosts a series of three polarizing V-cavities providing a highly polarized beam. The exchangeable straight and parabolic front-end sections of the guide system allow adapting the instrument resolution for any particular experiment and provide superior energy- and Q -resolution values when compared with the existing conventional guide and instrument concepts [1, 2]. In combination with the end position of cold neutron guide, the large doubly focusing HOPG monochromator and analyzer, the V-cavity for analysis of polarization of scattering beam, the KOMPASS TAS will be very well suited to study various types of weak magnetic order and excitations in variety of complex magnetic structures.

[1] M. Janoschek et al., Nucl. Instr. and Meth. A, **613**, 119 (2010)

[2] A. C. Komarek et al., Nucl. Instr. and Meth. A, **647**, 63 (2011)

E-mail of the corresponding author: dmitry.gorkov@frm2.tum.de

MARIA – The high-intensity polarized neutron reflectometer of JCNS – overview of current research and developments

Kirill ZHERNENKOV¹, Stefan MATTAUCH¹, Alexandros KOUTSIOUBAS¹, Sabine PÜTTER¹, Patrick Schöffmann¹, Amir Syed MOHD¹, Earl BABCOCK¹, Zahir SALHI¹, Alexander IOFFE¹, Thomas BRÜCKEL²

¹Jülich Centre for Neutron Science JCNS, Forschungszentrum Jülich GmbH, Outstation at MLZ, Garching, Germany

²Jülich Centre for Neutron Science JCNS and Peter Grünberg Institute PGI, JARA-FIT, Forschungszentrum Jülich GmbH, Jülich, Germany

MARIA of JCNS [1] is a state of the art high-intensity polarized neutron reflectometer that provides the opportunity to investigate reflectivity curves in a dynamic range of up to 7-8 orders of magnitude including off-specular scattering and GISANS measurement. Furthermore, the high intensity allows for kinetic measurements down to a few seconds over a dynamic range of 3-4 orders. In the case where dynamic ranges in order of 4-5 orders need to be accessed, the measurement time is in few minutes range. MARIA installed in the neutron guide hall of the FRM II reactor in Garching. A velocity selector ($4.5\text{\AA} < \lambda < 40\text{\AA}$) is used as a primary wavelength filter with resolution of 10% and in combination with the optional Fermi-Chopper the wavelength resolution can be increased to 3% or 1%. The full cross section of the beam is polarized by a double-reflecting super mirror ($4.5\text{\AA} < \lambda < 12\text{\AA}$) and in the vertical direction the elliptically focusing neutron guide significantly increases the flux at the sample position that permits to reduce the required sample size or measuring time. A flexible Hexapod, as sample table, can be equipped with an electromagnet (up to 1.1T) or a cryomagnet (up to 5T), low temperature sample environment, a UHV-chamber (10^{-10} mbar range) for measurements of Oxide MBE samples[2] and with various soft matter solid/liquid interface cells connected to a “sample robot” allowing automatic solvent contrast exchange and remote heating/cooling. Together with the $400 \times 400 \text{ mm}^2$ position sensitive detector and a time-stable ^3He polarization spin filter based on in-situ Spin-Exchange Optical Pumping (SEOP) covering the whole detected beam [3] the instrument is well equipped for investigating (off-)specular scattering from magnetic structures down to monolayer regime [4]. Furthermore, GISANS option can be used to investigate lateral structural and magnetic correlations in the nm range [5] with full polarization analysis. Due to large detector area even grazing incidence diffraction measurements are possible

[1] S. Mattauch, et al, J. Appl. Crystallography, **51**, 646(2018)

[2] A. Syed Mohd, et al, Rev. Sci. Instrum., **87**, 123909(2016)

[3] E. Babcock, et al, J.Phys.:Conf.Ser, **711**, 012008(2016)

[4] K. Zhang, et al, ACS Applied Materials&Interfaces, **13**,17, 20788-20795(2021)

[5] P. Pip, et al, Nanoscale Horiz., **6**, 474-484(2021)

E-mail of the corresponding author: k.zhernenkov@fz-juelich.de

**QUOKKA, the Pinhole Monochromatic Small Angle Neutron Scattering (SANS)
instrument for Magnetic Studies**

Kathleen WOOD¹, Chun-Ming WU², **Andrew MANNING**¹ and Elliot Paul GILBERT¹

¹Australian Centre for Neutron Scattering, Australian Nuclear Science and Technology Organisation, Lucas Heights, NSW 2234, Australia

²Neutron Group, Scientific Research Division, National Synchrotron Radiation Research Center, 101 Hsin-Ann Rd., Hsinchu Science Park, Hsinchu, Taiwan 30076

QUOKKA is a world-class 40 m SANS instrument with high flux and a state of the art high count rate detector. The instrument is designed to enable measurements at scattering vectors over three orders of magnitude, from $3 \times 10^{-4} \text{ \AA}^{-1}$ to $0.7 \text{ \AA}^{-1}$ and features incident beam polarisation and polarisation analysis [1]. A wide range of sample environments is available including a 1 T vertical electromagnet, a 1.5 T closed cycle horizontal magnet, a 10 T wet horizontal field magnet and a newly commissioned 7 T asymmetric re-condensing vertical magnet with a maximum ramping rate of 0.5 T/min, the latter optimised for polarisation and analysis studies. Several examples of magnetic SANS performed on QUOKKA are presented [2-4].

[1] K. Wood, J.P. Mata, C.J. Garvey, C.-M. Wu, ...E.P. Gilbert, *Journal of Applied Crystallography* **51** (2018) 294.

[2] K. Makino, J.D. Reim, D. Higashi, Y. Nambu, D. Okuyama, T.J. Sato, E.P. Gilbert, N. Booth, S. Seki, Y. Tokura, *Phys. Rev. B* **95** (2017) 134412.

[3] Y. Oba, N. Adachi, Y. Todaka, E.P. Gilbert, N. Booth, H. Mamiya, *Physical Review Research* **2** (2020) 033473.

[4] E. Perigo, Elliot Gilbert and Andreas Michels, *Acta Materialia* **87** (2015) 142.

andrew.manning@ansto.gov.au

Polarised neutrons for European Spallation Source instruments

Wai Tung LEE¹

¹ European Spallation Source, Lund, Sweden

Polarised neutrons will be a prominent feature in many ESS instruments. Of the currently approved 15 instruments [1], 12 instruments aim to have polarised neutron capabilities. They include 7 of 8 “first-instruments” that will soon begin hot-commissioning upon beam-on-target: diffractometers DREAM and MAGiC, spectrometers BIFROST and CSPEC, SANS instrument LoKI, reflectometer ESTIA, and imaging instrument ODIN. Depending on the instrument configuration, there will be combinations of different types of polariser, analyser and spin-flipper technologies to get the optimal performance and cost-effectiveness. They include MEOP and SEOP based polarised ³He neutron spin filters, polarising supermirrors, radio-frequency gradient-field spin flippers, and we will adopt innovative designs where applicable for these components. Even at an early stage of ESS operation, the neutron flux is expected to be on par with some of the polarised-neutron-capable instruments at major facilities. The polarisation developmental effort is therefore underway in parallel to instrument construction, with the aim of delivering polarised neutrons for first-science experiments as instruments are entering operation.

[1] K. Andersen *et. al.*, Nucl. Instrum. Methods Phys. Rev. A **957**,164302 (2020).

E-mail of the corresponding author: waitung.lee@ess.eu

Polarized instrumentation of the JCNS at the MLZ

Earl Babcock¹, Mikhail Feygenson^{1,2}, Artem Feoktystov¹, Christian Franz¹, Olaf Holderer¹, Vladimir Hutanu^{1,3}, Alexander Ioffe¹, **Stefan Mattauch**¹, Vitaliy Pipich¹, Aurel Radulescu¹, Zahir Salhi¹, Astrid Schneidewind¹, Yixi Su¹, Egor Vezhlev¹, Nicolo Vilolini², Jörg Voigt⁴

¹Forschungszentrum Jülich GmbH, JCNS at MLZ, 85748 Garching, Germany

²Forschungszentrum Jülich GmbH, JCNS-1, 52425 Jülich, Germany

³Institut für Kristallographie RWTH Aachen University, 52066 Aachen, Germany

⁴Forschungszentrum Jülich GmbH, JCNS-2, 52425 Jülich, Germany

The JCNS at MLZ operates 10 neutron instruments and a test beamline at the FRM II research reactor in Garching, and two more will come into operation with the new guide hall under construction. Of these over 80% have polarization “P” options, and many with polarization analysis “PA” capability. The polarized diffraction suite consists of three SANS instruments, KWS1, KWS2, KWS3, two reflectometers MARIA, TREFF and hot diffractometer POLI. The polarized spectroscopy suite currently contains cold triple axis PANDA, DNS wide angle spectrometer, neutron spin echo J-NSE and in the future a thermal spectrometer TOPAS. Some such as MARIA, DNS, J-NSE, TREFF, PANDA and POLI are in routine operation with P and PA. KWS-1 and KWS-2 have routine P but are waiting for commissioning of their in-situ polarized ³He PA systems, work which has been delayed due to the pandemic and reactor technical delays. In the meantime KWS-3 has commissioned a super mirror (SM) polarizer as well as off-line polarized ³He cells for PA. Other instruments continually work towards upgrades and new options. POLI is constructing two new in-situ ³He SEOP polarizers for P and PA which are nearing completion. Upcoming instruments such as TOPAS will be commissioned with P and PA when that guide hall comes into operation. Polarization components of TOPAS have already been used for P on POLI and PA on NEAT.

JCNS also makes significant instrument contributions to the ESS*: providing P for the DREAM instrument including an in-situ ³He polarizer similar to the TOPAS and POLI devices and novel permanent magnet guide fields to minimize shadowing of the DREAM back-scattering detectors in work partially funded by the Röntgen-Ångström Cluster**, and planning another similar in-situ ³He polarizer for the thermal wavelength band of the T-REX instrument.

*We thank Hal Lee’s contributions for integration of polarization devices and polarizers to the ESS, and **Sabrina Disch as co-proposer for the scientific part of the German portion of the Röntgen Ånström Cluster grant.

E-mail of the corresponding author: e.babcock@fz-juelich.de, s.mattauch@fz-juelich.de

QENS measurements with polarization analysis

Wangchun CHEN¹, Antonio FARAONE¹, Shannon WATSON¹, Yiming QIU¹, Jose RODRIGUEZ-RIVERA^{1,2}, M. NAGAO^{1,3}, Nicholas BUTCH¹, Craig BROWN¹

¹National Institute of Standards and Technology, Gaithersburg, Maryland 20899, USA

²Department of Materials Science & Engineering, University of Maryland, College Park, Maryland 20742, USA

³Center for Exploration of Energy and Matter, Indiana University, Bloomington, Indiana 47408, USA

A polarized neutron capability with wide-angle polarization analysis has been developed for studies of hard condensed matters on the Multi-Axis Crystal Spectrometer (MACS) at the National Institute of Standards and Technology Center for Neutron Research (NCNR) [1]. Here we report an expansion of the wide-angle polarization analysis capability for QENS studies of soft matters. The incident beam is polarized by a cylindrical ³He spin filter cell in a radio frequency-shielded solenoid and neutron polarization is flipped at will by inverting the ³He polarization using the adiabatic fast passage nuclear magnetic resonance technique. The scattered neutron polarization is spin-analyzed by a “horseshoe”-shaped ³He cell with wide-angle coverage of 240 degrees. The capability provides one of the most intense polarized cold neutron beams in neutron spectroscopy with a polarized incident neutron flux of $1 \times 10^8 \text{ cm}^{-2}\text{s}^{-1}$ at 10 meV. This capability has recently been employed to unambiguously separate the coherent and spin incoherent signal from the QENS spectra for the investigation of both the collective and single-particle dynamics in partially deuterated (CH₃OD, D 99.5 % purity) methanol [2]. Yet, the energy resolution in FWHM ($\approx 0.18 \text{ meV}$ at 3.4 meV and $\approx 0.255 \text{ meV}$ at 4.2 meV) on MACS might unfortunately represent the main limiting factor for soft matter applications. We are exploring ways to deploy the wide-angle polarization analysis capability on MACS to the Disk Chopper Spectrometer at NCNR that has much better energy resolution. We present the results of the first QENS study of partially deuterated methanol and advancement of the wide-angle polarization analysis capability for QENS measurements of both collective and single-particle dynamics.

[1] W.C. Chen *et al.*, J. Phys.: Conference Series, **746**, 012016 (2016).

[2] W.C. Chen *et al.*, Physica B, **564**, 166-171 (2019).

E-mail of the corresponding author: wcchen@nist.gov; afaraone@nist.gov

Abstracts – Posters 2

Friday, July 30th, 2021

9:00 – 10:00 AM EST

Polarized Neutron Techniques and Methods

P2-1: Polarization system for a proposed small- and wide-angle neutron scattering diffractometer/spectrometer, CENTAUR, at the Second Target Station of SNS

Shuo QIAN, Chenyang JIANG

Page 52

P2-2: High performance hot neutron polarizer based on in-situ polarized ^3He

Earl BABCOCK, Zahir SALHI, Vladimir HUTANU, Jos DAMEAN, Wolfgang LUBERSTETTER, Simon STARINGER, Vladimir OSSYVI, Stefan MATTAUCH, Jörg VOIGT

Page 53

P2-3: PASTIS on NEAT: polarization analysis with ^3He on a high performance TOF neutron spectrometer

Earl BABCOCK, Z. SALHI, P. Pistel, F. Beule, A. IOFFE, G. GÜNTHER, R. GAINOV, K. KIEFER, B. KLEMKE, R. WORACEK, F. MEZEI, M. RUSSINA

Page 54

P2-4: ^3He system at China Spallation Neutron Source (CSNS)

Chuyi HUANG, Junpei ZHANG, Fan YE, Zecong QIN, Syed Mohd AMIR, Zachary Norris BUCK, Ahmed SALMAN, Wolfgang KREUZPAINTNER, Xin QI, Tianhao WANG, Xin TONG

Page 55

P2-5: At last, an *in-situ* polarized ^3He neutron spin filter has been installed on POLANO at J-PARC

Takashi INO, Manabu OHKAWARA, Naokatsu KANEKO, Kouhei HAYASHI, Tetsuya YOKOO, Shinichi ITOH, Yoichi IKEDA, Masaki FUJITA

Page 56

P2-6: The Larmor phase correction of MIEZE

Fankang LI, Georg EHLERS

Page 57

P2-7: A cylindrical miniaturised polarisation analysis device (MiniPAD)

Ran TANG, Henrik GABOLD, Robert GEORGII, Peter BÖNI

Page 58

P2-8: Progress on ^3He NSF cell filling station and magnetic holding field for polarized neutron scattering experiments at China Spallation Neutron Source

Amir SYED MOHD, Zecong QIN, Chuyi HUANG, Zack BUCK, Junpei ZHANG, Ahmed SALMAN, Fan YE, Wolfgang KREUZPAINTNER, Tianhao WANG, Xin TONG

Page 59

P2-9: Novel type polarization analysis using multi-analyzer setup @ PUMA, FRM II
Avishek MAITY, Steffen SCHWESIG, Jitae PARK, Jürgen NEUHAUS, Götz ECKOLD
Page 60

P2-10: Development of a compact wide-angle neutron spin-echo device
Eric DEES, Rob DALGLIESH, Jak DOSKOW, Steve KUHN, Sam MCKAY, Steve
PARNELL, Roger PYNN, Jiazhou SHEN
Page 61

P2-11: Simulation and optimization of a polarizing bender for Flexx at MLZ
J. XU, T. KELLER, A. OSTERMANN, M. SKOULATOS, R. GEORGII
Page 62

P2-12: Demonstration of contextuality in neutrons and entangled neutron scattering
Steve KUHN, Dave V. BAXTER, Eric DEES, Abu IRFAN, Shufan LU, Sam MCKAY, Gerardo
ORTIZ, Roger PYNN, Jiazhou SHEN, W. Mike SNOW, Vincent VANGELISTA
Page 63

P2-13: Spin textured neutron beams
Sam MCKAY, Fankang LI, Eric DEES, Steve KUHN, Jiazhou SHEN, Vinnie VANGELISTA,
Quan THEIN, Abu IRFAN, David V. BAXTER, Mike SNOW, Gerardo ORTIZ, Roger PYNN
Page 64

P2-14: Neutron polarimetry using a polarized ^3He cell for the aCORN experiment
Benjamin SCHAFER, William BYRON, Wangchun CHEN, Brian COLLETT, Maynard Scott
DEWEY, Thomas GENTILE, Md HASSAN, Gordon JONES, Alexander KOMIVES, Fred
WIETFELT
Page 65

**P2-15: A new phase-correction method using complete ellipsoidal focusing mirrors for
neutron resonance spin-echo spectroscopy: Double-focusing method**
Fumiaki FUNAMA, Seiji TASAKI, Masahiro HINO, Tatsuro ODA, Hitoshi ENDO
Page 66

P2-16: An introduction of the TOF-MIEZE spectrometer at J-PARC MLF BL06
Tatsuro ODA, Masahiro HINO, Fumiaki FUNAMA, Hitoshi ENDO, Hidetoshi OHSHITA,
Tomohiro SEYA, Yoshiji YASU
Page 67

**P2-17: Development of a large beam high efficiency radio-frequency neutron spin flipper
for the polychromatic reflectometer CANDOR**
Wangchun CHEN, Ross ERWIN, Peter TSAI, Md. T. HASSAN, Nancy HADAD, Charles
MAJKRZAK
Page 68

P2-18: Status of the ^3He Program at the NCNR
Shannon WATSON, Hannah BURRALL, Wangchun CHEN, Ross ERWIN, Thomas GENTILE
Page 69

Polarized Neutron Instrumentation

P2-19: Polarization Analysis Capability on vSANS at NCNR

Hannah BURRALL, Shannon WATSON, Kathryn KRYCKA, Wangchun CHEN

Page 70

P2-1: Polarized neutron techniques and methods

Polarization system for a proposed small- and wide-angle neutron scattering diffractometer/spectrometer, CENTAUR, at the Second Target Station of SNS

Shuo QIAN, Chenyang JIANG


Oak Ridge National Laboratory, Oak Ridge, TN USA

CENTAUR is an instrument concept proposed for the Second Target Station (STS) of the Spallation Neutron Source at ORNL. The instrument will leverage the STS source and large detector coverage to deliver a capability that will enable assessment over a wide range of length scales with excellent resolution, measurements on smaller samples, and time-resolved investigations of evolving structures in soft matter, polymer sciences, geology, biology, quantum condensed matter, and other materials sciences. The addition of the polarized neutron capability and a high-resolution chopper will enable detailed structural and dynamical investigations of magnetic materials and quantum materials.

We will present the polarization system at CENTAUR (shown in the figure below). Based on the science cases, the required Q range for polarization analysis is $0.002 \text{ \AA}^{-1}$ to $0.3 \text{ \AA}^{-1}$. A supermirror polarizer in the optics system will provide polarized neutron. For simplicity and practicality, an ex-situ polarized ^3He analyzer system will be used after the sample position. In the ex-situ system[1], multiple ^3He cells with different diameters of up to 15 cm can be dropped in and swapped easily during the experiment as needed.

- (1) Wang, T.; Jiang, C. Y.; Farmer, T. O.; Debeer-Schmitt, L.; Wenzel, J. F.; McDonald, L.; Robertson, J. L.; Fitzsimmons, M. R.; Tong, X. New Polarized Small Angle Neutron Scattering Capability at the High Flux Isotope Reactor. *Phys. B Condens. Matter* **2018**, *551*, 492–495. <https://doi.org/10.1016/j.physb.2017.12.041>.

E-mail of the corresponding author: qians@ornl.gov

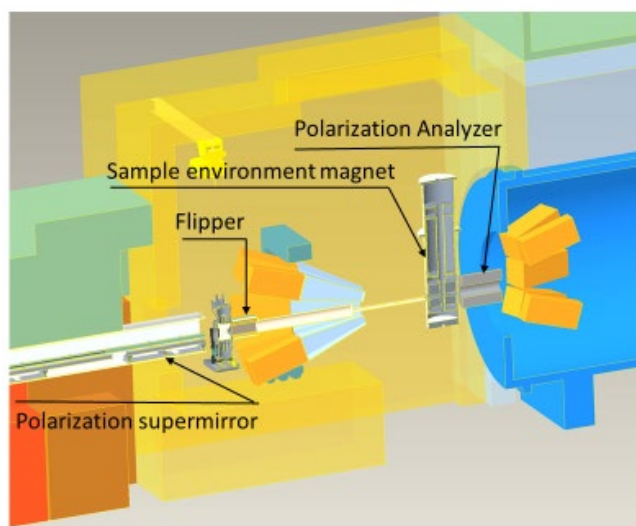

High performance hot neutron polarizer based on in-situ polarized ^3He

**Earl Babcock¹, Zahir Salhi¹, Vladimir Hutanu^{1,2}, Jos Damean³, Wolfgang Luberstetter^{1,2},
Simon Staringer¹, Vladimir Ossyvi¹, Stefan Mattauch¹, Jörg Voigt⁴**

¹Forschungszentrum Jülich GmbH, JCNS @ MLZ, 85747 Garching, Germany

²Institut für Kristallographie RWTH Aachen University, 52066 Aachen, Germany

³Forschungszentrum Jülich GmbH, ZEA-1, 52428 Jülich, Germany

⁴Forschungszentrum Jülich GmbH, JCNS, 52428 Jülich Germany

We have developed compact and high performance in-situ ^3He polarizers based on spin-exchange optical pumping for the polarization and polarization analysis of hot (wavelengths from 0.3 to 1.1 Å, and energy from 0.06 to 1 eV) neutrons. Efficient polarization of neutrons of these wavelengths/energies is difficult to perform by means of other methods. Therefore, ^3He technique is of major interest. Our ^3He polarizers have been commissioned and used for 0.9 Å neutrons where neutron polarizations in excess of 97% with over 24% neutron transmission are achieved[1]. The performance can easily be extended to 0.3 Å neutrons as would be available on the POLI instrument at the MLZ in Germany[2] by utilizing a higher pressure ^3He cell. Consequently we are in the processes of completing an upgraded polarizer design optimized for this neutron instrument that can also operate in the vicinity of the available 8 T sample magnet[3]. These polarizers will be used for studies of magnetism in single crystal neutron diffraction as well as in fundamental and particle physics. Using the double focused beam of POLI they enable one of the most intense polarized hot neutron beams available.

[1] Z. Salhi, E. Babcock, K. Bingöl, K. Bussmann, H. Kammerling, V. Ossovy, A. Heynen, H. Deng, V. Hutanu, S. Masalovich, J. Voigt, A. Ioffe, “In-situ ^3He SEOP polarizer for thermal neutrons”, J. Phys.: Conf. Ser. **1316**, 012009 (2019), doi:10.1088/1742-6596/1316/1/

[2] V. Hutanu, POLI: Polarised hot neutron diffractometer. Journal of large-scale research facilities, **1**, A16. (2015) <http://dx.doi.org/10.17815/jlsrf-1-22>

[3] V. Hutanu, H. Thoma, H. Deng, G. Brandl, A. Weber, V. Rubansky, J. Peters, W. Luberstetter, T. Krist, G. Roth, L. Peters, S. Mattauch, T. Brückel, „New polarized neutron diffraction setup for precise high-field investigations of magnetic structures up to 8 T at MLZ”, IEEE Trans. Magn. (2021); <https://ieeexplore.ieee.org/document/9436782>

E-mail of the corresponding author: e.babcock@fz-juelich.de

**PASTIS on NEAT:
polarization analysis with ^3He on a high performance TOF neutron spectrometer**

Earl BABCOCK¹, Z. SALHI¹, P. Pistel², F. Beule³, A. IOFFE¹, G. GÜNTHER⁴, R. GAINOV^{4,5}, K. Kiefer⁴, B. Klemke⁴, R. Woracek⁶, F. MEZEI⁷, M. RUSSINA⁴

¹JCNS at MLZ, Forschungszentrum Jülich GmbH, 85748 Garching Germany,

²ZEA-1, Forschungszentrum Jülich GmbH, 52425 Jülich, Germany,


³JCNS and ICS Forschungszentrum Jülich GmbH 52425 Jülich, Germany,

⁴Helmholtz Zentrum Berlin, 14109 Berlin, Germany; ⁵MRE, RWTH Aachen, 52062 Aachen, Germany, ⁶ESS ERIC, 22100 Lund, Sweden, ⁷Mirrotron Ltd, 1121 Budapest, Hungary

The NEAT spectrometer is a high performance, low background, time-of-flight (TOF) neutron spectrometer that was operated and developed at the former medium flux BERII reactor in Berlin¹. Few inelastic neutron scattering instruments with large area detectors have been able to achieve polarization analysis, partly due to low intensity of the scattering signals coupled with the losses in neutron flux due to the addition of polarization that can reduce flux at the detectors by an order of magnitude. However, the unique chopper system and final upgrades to the instrument resulted in detector count rates using polarization analysis that remained about an order of magnitude higher than the pre-upgrade values, giving NEAT a world class polarized neutron performance for an instrument of this type. The polarization is performed by a V-type supermirror², and the analysis by a wide angle SEOP-polarized ^3He spin filter cell in a PASTIS style magnetic environment³. This PASTIS system, originally developed for XYZ polarization on the thermal TOF spectrometer TOPAS to be operated on the FRM II reactor at the MLZ in Garching⁴, provided good polarization analysis performance for the full detector coverage of 240° horizontal and 40° vertical for incident wavelengths of 2 Å to 6 Å. The ^3He lifetime was up to 100 hours in one horizontal direction “X” and about 40 hours in the vertical “Z” and other horizontal direction “Y” with a 4 cm outer diameter cryostat installed for the sample. The incident neutron polarization was guided into this compact system with a special XYZ guide-coil system without adverse effects on either the neutron polarization or ^3He lifetime. We present the performance of the PASTIS system and experiences gained from this work.



JCNS PASTIS on NEAT showing the cryostat and ^3He PASTIS cell installed providing large scattering angles.

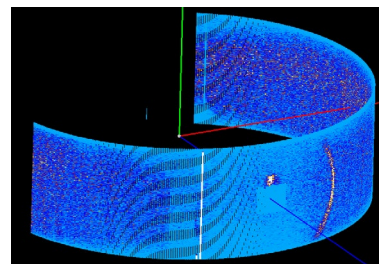

NEAT Detector map showing complete detector coverage of 240° by 40° from the ^3He cell.

[1] M. Russina, G. Günther, V. Grzimek et al, *Physica B Condensed Matter*, 2018, doi: 10.1016/j.physb.2017.12.026, [2] G Günther, F. Mezei, J. Füzi et al, *J. of Physics Conference Series* (2019) doi: 10.1088/1742-6596/1316/1/012008 [3] E. Babcock, Z. Salhi, R.R. Gainov et. Al, *AIP Conference Proceedings* (2018) doi: 10.1063/1.5039302 [4] J. Voigt, H. Soltner E. Babcock et al, *The European Physical Journal Conferences* (2015) doi: 10.1051/epjconf/20158303016

E-mail for corresponding author: e.babcock@fz-juelich.de, z.salhi@fz-juelich.de

P2-4: Polarized neutron techniques and methods

^3He system at China Spallation Neutron Source (CSNS)

Chuyi Huang^{1,2}, Junpei Zhang^{1,2}, Fan Ye^{1,2}, Zecong Qin^{1,2}, Syed Mohd Amir^{1,2}, Zachary Norris Buck^{1,2}, Ahmed Salman^{1,2}, Wolfgang Kreuzpaintner^{1,2}, Xin Qi^{1,2}, Tianhao Wang^{1,2}, **Xin Tong^{1,2}**

¹Institute of High Energy Physics, Chinese Academy of Science(CAS), Beijing, China

²Spallation Neutron Source Science Center, Dongguan, China

The China Spallation Neutron Source (CSNS), as one of the major neutron facilities in China, has committed resources to the development of a polarized ^3He NSF program to support its growing polarized neutron research. A spin-exchange optical pumping (SEOP) station based polarized ^3He system and other necessary hardware for NSF transport has been recently developed.

The performance of the system is benchmarked using an in-house developed cell named ``Trident" [1] at the neutron technology development beamline (BL-20) at the CSNS. The cell was fully polarizing using the off-situ SEOP station then transported to the BL-20 for neutron transmission measurement to quantify the polarization of the ^3He gas. Neutron beam measurements yield a ^3He polarization of 77% with over 200 hours of on beam relaxation time.

Combining this newly developed SEOP system with the recently reported cell fabrication station, CSNS is now capable of fully self-sustained production of ^3He NSFs that shall support its future neutron polarization research.

[1] Z. Qin, C. Huang, Z. Buck, W. Kreuzpaintner, S. Amir, A. Salman, F. Ye, J. Zhang, C. Jiang, T. Wang, and X. Tong, Chin. Phys. Lett. **38**, 052801 (2021).

tongxin@ihep.ac.cn

**At last, an *in-situ* polarized ^3He neutron spin filter has been installed
on POLANO at J-PARC**

Takashi INO^{1,2}, Manabu OHKAWARA³, Naokatsu KANEKO^{1,2}, Kouhei HAYASHI^{1,2},
Tetsuya YOKOO^{1,2}, Shinichi ITOH^{1,2}, Yoichi IKEDA³, Masaki FUJITA³

¹1-1 Oho (KEK, Institute of Materials Structure Science, Tsukuba, Japan)

²2-4 Shirakata (J-PARC Center, Materials and Life Science Division, Tokai-mura, Japan)

³2-1-1 Katahira (Tohoku University, Institute for Materials Research, Sendai, Japan)

An *in-situ* polarized ^3He neutron spin filter (NSF) for incident neutron beam polarization has been installed recently on POLANO - Polarized Neutron Spectrometer - at Materials and Life Science Experimental Facility, J-PARC [1]. POLANO is an inelastic neutron scattering instrument that enables polarization analysis of inelastic scattering experiments to investigate dynamical properties of multiple degrees of freedom [2]. Incident neutrons up to 100 meV are to be polarized with the newly installed *in-situ* ^3He NSF, and scattering neutrons up to 40 meV can be spin-analyzed by $m = 5.5$ supermirrors. The commissioning of the ^3He NSF is now underway, and the first polarized neutron beam will soon be delivered on POLANO.



[1] T. Ino, M. Ohkawara, K. Ohoyama, T. Yokoo, S. Itoh, Y. Nambu, M. Fujita, H. Kira, H. Hayashida, K. Hiroi, K. Sakai, T. Oku, and K. Kakurai, J. Phys.: Conf. Ser. **862**, 012011 (2017).

[2] T. Yokoo, S. Itoh, N. Kaneko, M. Fujita, T. Ino, M. Ohkawara, K. Ohoyama, and M. Sakaguchi, AIP Conference Proceedings **1969**, 050001 (2018).

takashi.ino@kek.jp

The Larmor phase correction of MIEZE

Fankang LI¹, Georg EHLERS¹

¹ Neutron Technologies Division, Oak Ridge National Laboratory, Oak Ridge, TN, USA

Modulation of Intensity Emerging from Zero Effort (MIEZE) is a neutron resonant spin echo technique which allows one to measure the time correlation functions in materials by modulating the neutron beam using radio-frequency (RF) neutron spin flippers. The technique avoids neutron spin manipulation between the sample and the detector, and thus could find applications in cases where the sample depolarizes the neutron beam. However, the finite sample size creates a variance in the neutron path length between the locations where scattering and detection happens, which causes the aberrations in Larmor phase. Such aberrations greatly limit the contrast in the intensity modulation in particular towards long correlation times or large scattering angles. We propose two approaches to correct such aberrations, which will enable us to extend those detection limits to longer times and larger angles. One approach involves the physical tilting of the RF flippers in the primary spectrometer with respect to the beam direction [1] and the other approach involves two magnetic Wollaston prisms in addition to the two RF flippers [2]. Both approaches can shape the wave front of the intensity modulation at the sample position to compensate for the path variance from the sample and the detector. The simulation results indicate that both approaches enable one to operate a MIEZE instrument at much increased RF frequencies, thus improving the effective energy resolution of the technique.

[1] R. Dadisman, G. Ehlers and F. Li, Large Angle MIEZE with Extended Fourier Time, <https://arxiv.org/abs/2105.00604>

[2] F. Li, The Linear Phase Correction of MIEZE with Magnetic Wollaston Prisms, <https://arxiv.org/abs/2105.00605>

E-mail of the corresponding author: frankli@ornl.gov

A cylindrical miniaturised polarisation analysis device (MiniPAD)

Ran TANG^{1,2}, Henrik GABOLD¹, Robert GEORGII^{1,2}, Peter BÖNI¹

¹Physik-Department, Technische Universität München (TUM), 85748 Garching, Germany

²Heinz Maier-Leibnitz Zentrum (MLZ), 85748 Garching, Germany

Spherical neutron polarimetry (SNP) has been systematically developed and applied over the last decades since the Cryogenic Polarisation Analysis Device (CryoPAD) presented by Tasset et al. in 1989 [1-3]. This technique gives access to all nine components in the polarisation matrix and therefore allows solving the Blume-Maleyev equations describing the spin evolution in the neutron magnetic scattering [4,5]. The biggest advantage of SNP over conventional polarisation analysis methods is its ability to separate nuclear and magnetic contributions even in the presence of finite nuclear-magnetic interference terms. Hence, the magnetic properties, e.g. magnetoelectricity, non-collinear magnetic structures and different types of magnetic domains in antiferromagnetic structures, can be finely determined. Inspired by the previous devices [6,7], the MiniPAD is designed to have a very compact form with the precession coils bent into a cylindrical shape around the sample, allowing scattering angles up to 140°. Thanks to its size, it is simple to handle and can be easily inserted into a standard cryostat. We would like to report on the latest development of MiniPAD including the newest measurements and the subsequent optimisations.

[1] F. Tasset et al., Journal of Applied Physics **63**, 3606 (1988).

[2] F. Tasset, Physica B: Condensed Matter, **156–157**, 627-630 (1989).

[3] F. Tasset et al., Physica B: Condensed Matter, **267–268**, 69-74 (1999).

[4] M. Blume, Phys. Rev. **130**, 1670 (1963).

[5] S.V. Maleyev et al., Soviet Phys.-Solid State (English Transl.), **4** (1963).

[6] M. Janoschek et al., Physica B: Condensed Matter, **397**, 125-130 (2007).

[7] J. Kindervater et al., Phys. Rev. B, **89**, 180408(R) (2014).

E-mail of the corresponding author: Ran.Tang@frm2.tum.de

Progress on ^3He NSF cell filling station and magnetic holding field for polarized neutron scattering experiments at China Spallation Neutron Source

Amir SYED MOHD^{1,2}, Zecong QIN^{1,2}, Chuyi HUANG^{1,2}, Zack BUCK^{1,2}, Junpei ZHANG^{1,2}, Ahmed SALMAN^{1,2}, Fan YE, Wolfgang KREUZPAINTNER^{1,2}, Tianhao WANG^{1,2}, Xin TONG^{1,2}

¹Institute of High Energy Physics, Chinese Academy of Sciences (CAS), Beijing 100049, China

²Spallation Neutron Source Science Center, Dongguan, 523803, China

Polarized neutrons are unique probe for the investigation of magnetic properties in the materials. Polarized neutron scattering experiments require control of neutron polarization and its polarization analysis. Owing to its spin dependent strong absorption and negligible scattering cross sections with neutrons, polarized ^3He gas in a suitable glass cell is used as a wide band neutron spin filter (NSF) at most of the neutron sources. Recently, CSNS has started successfully producing ^3He NSF cells and has developed related techniques on site.

^3He glass cells and tubing for NSF applications are blown in-house in a dedicated lab area. Filling station equipped with gas purifiers and residual gas analyzer (RGA) is used for filling the mixture of high purity $^3\text{He}/\text{N}_2$ gases and K/Rb alkali metals in the cell [1]. ^3He gas up to 3 bar can be sealed in the glass cell using liquid N_2 bath. ^3He filled cells, to be used for NSF applications, are polarized using Spin Exchange Optical Pumping (SEOP) method [2]. Polarized ^3He cell can be used for NSF applications either in-situ [3] or off-situ conditions at the polarized neutron scattering instruments (beamlines). Life time of ^3He cell is very sensitive to the magnetic field inhomogeneity. So, off-situ (^3He cell not being continuously pumped at the beamline) use of ^3He NSF cells must be transported and kept in homogeneous magnetic field environment avoiding any interference with stray magnetic field.

In this poster I will be introducing our newly built filling station and shielded solenoid based homogeneous magnetic field cavity to hold ^3He polarization. The cell was transported to the test beamline (BL-20) at CSNS in the magnetic holding field to check its performance. Obtained results will be discussed in the poster.

[1] Zecong Qin et. al., Chin. Phys. Lett., **38**, 052801 (2021).

[2] Chuyi Huang et. al., Chin Phys. Lett. (submitted).

[3] Junpei Zhang et. al., to be submitted

E-mail of the corresponding author: tongxin@ihep.ac.cn


Novel type polarization analysis using multi-analyzer setup @ PUMA, FRM II

Avishek MAITY^{1,2}, Steffen SCHWESIG¹, Jitae PARK², Jürgen NEUHAUS², Götz ECKOLD¹

¹Institute for Physical Chemistry, University of Göttingen, Göttingen, Germany

²Heinz Maier-Leibnitz Zentrum (MLZ), Technical University of Munich, Garching, Germany

The thermal triple-axis-spectrometer PUMA at the neutron research reactor FRM II (MLZ) is one of the most robust and yet extremely flexible instruments worldwide of its kind. To meet the ever-growing demands of the scientific community worldwide, PUMA delivers a good number of unique features in addition to its “*normal triple axis*” setup. Multiplexing using eleven arbitrarily configurable analyzer-detector channels of the multi-analyzer-multi-detector setup is one of such available features. In particular, single shot kinetic experiments are well suited as the setup allows the measurements of an entire ($\mathbf{Q}, \omega$)-scan within a time scale even less than a minute as a function of any external stimulant [1]. Moreover, the same setup can be very efficiently used for polarization experiments. By directing the spatially separated different spin-states of the scattered neutrons into the different analyzer channels, the spin flip (SF) and the non-spin flip (NSF) components can be simultaneously determined [2], and to best of our knowledge none of the conventional existing neutron instruments collects both spin-states at the same time. Especially in case of kinetic time-resolved experiments, where both spin states need to be registered synchronously at the same state of the sample, this set up is of absolute necessity. To allow an easy and efficient operation of this sophisticated polarization setup and provide support for subsequent data analysis, we have also developed GUI based MAX-PA software. I will present the current status of this novel type polarization analysis setup at PUMA, including results from the pilot experiments [3].

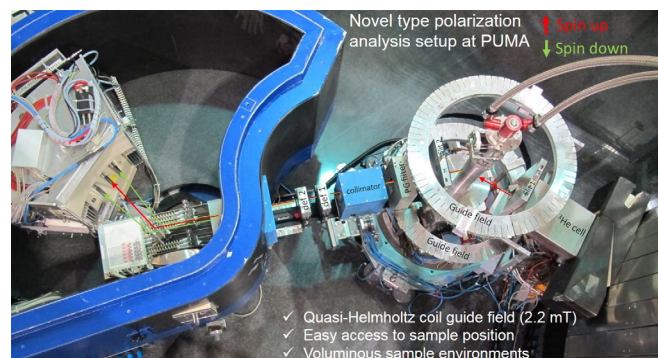

[1] O. Sobolev et al., NIMA, **772**, 63–71 (2015).

[2] S. Schwesig et al., NIMA, **877**, 124-30 (2018).

[3] A. Maity et al., Phys. Status Solidi B, **257**, 1900704 (2020)

E-mail of the corresponding author: avishek.maity@frm2.tum.de

Development of a compact wide-angle neutron spin-echo device

Eric DEES¹, Rob DALGLIESH², Jak DOSKOW¹, Steve KUHN¹, Sam MCKAY¹, Steve PARNELL³, Roger PYNN^{1,4}, Jiazhou SHEN¹

¹Indiana University, Center for Exploration of Energy and Matter, Bloomington, USA

²ISIS Pulsed Neutron and Muon Source, Rutherford Appleton Laboratory, Chilton, Oxon, OX11 0QX, UK

³Faculty of Applied Sciences, Delft University of Technology, Mekelweg 15, 2629 JB Delft, The Netherlands

⁴Neutron Science Division, Oak Ridge National Laboratory, Oak Ridge, Tennessee, U.S.A.

Neutron Spin Echo (NSE) is well established as a high energy resolution technique. However, most NSE instruments accept only a narrow range of scattering angles from the sample, limiting their application in short length-scale materials and increasing measurement times. We present a design and prototype of a compact, modular NSE device with a $\sim 10^\circ$ angular acceptance. A key obstacle in wide-angle NSE is the maintenance of a constant field integral as a function of scattering angle, which we address by changing the field shape to approximate a circle centered on the sample position. The precession field region is well defined using high-temperature superconducting (YBCO) films as Meissner screens while the angular dependence of the magnetic field integral is cancelled by shaped pole caps on the superconducting magnets that provide the precession field. This half-meter long device can achieve a ~ 1 ns spin echo time for cold neutrons. The device includes two magnetic Wollaston prisms that can accomplish linear field-integral corrections. In addition, the inclusion of these prisms allows the device to be used easily for spin-echo code of scattering angles for applications such as SESANS, SEMSANS, Larmor diffraction and phonon focusing. We have designed the device so that all components can have their magnetic fields either vertical or horizontal, allowing for the creation of spin textured beams, including orbital angular momentum states.

E-mail of the corresponding author: ericdees@iu.edu

Simulation and optimization of a polarizing bender for Flexx at MLZ

J. Xu^{1*}, T. Keller^{2,3}, A. Ostermann¹, M. Skoulatos¹, R. Georgii¹

¹Heinz Maier-Leibnitz Zentrum (MLZ), Technische Universität München, 85748 Garching, Germany

²Max-Planck-Institut für Festkörperforschung, Heisenbergstrasse 1, 70569 Stuttgart, Germany

³Max Planck Society Outstation at the Forschungsneutronenquelle Heinz Maier-Leibnitz (FRM-II), Garching, Germany

The cold neutron triple-axis spectrometer Flexx at the BER2 reactor in Berlin will be transferred to the FRM2 reactor in Munich. The original polarizing solid state S-bender in the neutron guide is not suitable for the guide system at FRM2 and a new bender after the monochromator is needed. To design and optimize the bender, we performed Monte Carlo ray tracing simulations using the McStas software and compared several polarizing benders. We explored the methods to improve the performance of the transmission C-bender for a larger wavelength range and proposed a transmission C-bender with the two remnant polarizing collimators, which shows a high performance.

*E-mail: jianhui.xu@frm2.tum.de

Demonstration of contextuality in neutrons and entangled neutron scattering

Steve KUHN, Dave V. BAXTER, Eric DEES, Abu IRFAN, Shufan LU, Sam McKAY, Gerardo ORTIZ, Roger PYNN, Jiazhou SHEN, W. Mike SNOW, Vincent VANGELISTA

¹Indiana University Department of Physics, Bloomington, Indiana USA

²Center for Exploration of Energy and Matter, Indiana University, Bloomington, Indiana USA

³ Quantum Science and Engineering Center, Indiana University, Bloomington, Indiana USA

The non-locality of physical reality is a well-known and rigorously tested consequence of quantum mechanics. *Contextuality*, a generalization of non-locality, essentially states that the measurements of quantum systems do not reveal pre-existing values: the observed result depends on the *context*, the set of all compatible (simultaneously measurable) observables [1]. Entanglement is the cause of the nonclassical correlations that are responsible for contextuality, as well as many other phenomena in complex materials, such as superconductivity and quantum spin liquids. Confirmation of contextuality implies confirmation of a mode-entangled (intraparticle entangled) neutron beam.

We have demonstrated contextuality in a bipartite-entangled (spin and path) and tripartite (spin, path, and energy) neutron beam using magnetic Wollaston prisms and radio-frequency flippers at both a continuous reactor source and a pulsed spallation source [2,3]. Analogous to the violation of the Bell inequality, we constructed the Clauser-Horne-Shimony-Holt (CHSH) contextuality witness and observed the maximal violation of the classical bound of the CHSH inequality. Maximal entanglement was verified down to path separations below 100 nm, even when the wavepackets of the two paths significantly overlapped.

We expect these entangled beams to be sensitive to samples with entanglement at similar length scales to the separation of the two paths. An ongoing theoretical investigation has already shown the existence of unique scattering signatures with entangled samples in idealized models [4].

[1] S. Kochen and E. P. Specker, Journal of Mathematics and Mechanics, **17**, 59 (1967).

[2] J. Shen et al., Nature Communications, **11**, 930 (2019).

[3] S. Kuhn et al., Physical Review Research [Accepted; in production]

[4] Abu Irfan et al., arXiv:2008.04328 (2020)

E-mail of the corresponding author: samckay@iu.edu

Spin textured neutron beams

Sam McKAY^{1,2,3}, Fankang LI⁴, Eric DEES^{1,2,3}, Steve KUHN^{1,2,3}, Jiazhou SHEN^{1,2,3}, Vinnie VANGELISTA^{1,2,3}, Quan THEIN^{1,2,3}, Abu IRFAN^{1,2,3}, David V. BAXTER^{1,2,3}, Mike SNOW^{1,2,3}, Gerardo ORTIZ^{1,2,3}, Roger PYNN^{1,2,3,4}

¹Indiana University Department of Physics, Bloomington, USA

²Center for Exploration of Energy and Matter, Indiana University, Bloomington, USA

³ Quantum Science and Engineering Center, Indiana University, Bloomington, USA

⁴Neutron Technologies Division, Oak Ridge National Laboratory, Oak Ridge, USA

The technique of spin echo modulated small angle neutron scattering (SEMSANS) was suggested several years ago and has been implemented at polarized beam lines both at reactor and pulsed neutron sources [1]. The method uses inclined neutron spin flippers to create a well-defined spatial modulation of the neutron polarization which, when analyzed, yields a pattern of intensity stripes on a position sensitive neutron detector. A scattering sample blurs these stripes, and the degree of blurring yields direct information about the real-space correlation function for the scattering entities in the sample. One method that we have successfully used to produce such a striped intensity pattern involves the use of superconducting magnetic Wollaston prisms. Using McStas simulations and analytic calculations, we show that various combinations and orientations of Wollaston prisms can be used to prepare more complex spatial spin structures, including “checkerboards” and vortex lattices that carry orbital angular momentum (OAM). We show that it is possible to set up an OAM echo experiment in which the full neutron polarization is retrieved when no scattering sample is used. We discuss potential uses for spatially textured beams.

[1] F. Li, et al., Scientific Reports, **9**, 8563 (2019)

E-mail of the corresponding author: samckay@iu.edu

Neutron polarimetry using a polarized ^3He cell for the aCORN experiment

Benjamin SCHAFER¹, William BYRON⁴, Wangchun CHEN^{2,3}, Brian COLLETT¹,
Maynard Scott DEWEY², Thomas GENTILE², Md HASSAN^{2,3}, Gordon JONES¹, Alexander
KOMIVES⁵, Fred WIETFELT⁴

¹Hamilton College, Clinton, NY 13323, USA

²National Institute of Standards and Technology, Gaithersburg, MD 20899, USA

³University of Maryland, College Park, MD 20742, USA

⁴Tulane University, New Orleans, LA 70118, USA

⁵DePauw University, Greencastle, IN 46135, USA

The neutron polarization of the unpolarized NG-C beamline at the NIST Center for Neutron Research was measured as part of the aCORN neutron beta decay experiment. Neutron transmission through a polarized ^3He spin filter cell was recorded while adiabatic fast passage (AFP) nuclear magnetic resonance (NMR) reversed the polarization direction of the ^3He in an eight-step sequence to account for drifts. The dependence of the neutron transmission on the spin filter direction was used to calculate the neutron polarization. The time dependent transmission was fit to a model which included the neutron spectrum, and ^3He polarization losses from spin relaxation and AFP-NMR. The method, analysis, and result of $|P_n| \leq 4 \times 10^{-4}$ with 90% confidence will be presented.

[1] B.C. Schafer, W.A. Byron, W.C. Chen, B. Collett, M.S. Dewey, T.R. Gentile, Md.T. Hassan, G.L. Jones, A. Komives, F.E. Wietfeldt, Nuclear Inst. And Methods in Physics Research A, **988**, 164862 (2021).

E-mail of the corresponding author: schafer@g.harvard.edu

**A new phase-correction method using complete ellipsoidal focusing mirrors
for neutron resonance spin-echo spectroscopy: Double-focusing method**

Fumiaki FUNAMA¹, Seiji TASAKI¹, Masahiro HINO², Tatsuro ODA², Hitoshi ENDO³

¹Department of Nuclear Engineering, Kyoto University, Kyoto, Japan

²Institute for Integrated Radiation and Nuclear Science, Kyoto University, Kumatori, Japan

³Institute of Materials Structure Science / J-PARC Center, High Energy Accelerator Research Organization (KEK), Tokai, Japan

Neutron resonance spin-echo (NRSE) spectroscopy is a technique for measuring intermediate scattering functions of samples using resonance spin flippers (RSFs) [1]. NRSE geometries with focusing mirrors have been proposed in previous studies [2, 3]. NRSE spectrometers with focusing mirrors enable experiments with a high energy resolution and signal-to-noise ratio simultaneously. Only a limited circumference of a complete ellipsoidal mirror to reflect the neutron beam was used in previous studies. Therefore, the neutron spin phase was aligned by tilting the RSFs which are set to be perpendicular to the diagonal of the right triangle determined by the semi-major and semi-minor axes of the ellipse. The effect of this tilt was numerically evaluated [3]. This tilt increased the MIEZE contrast in an experiment [4] using developed ellipsoidal focusing supermirrors [5]. However, the utilization of larger divergent beams using the entire circumference of an ellipsoidal focusing mirror is impossible via this tilt method because the RSFs can only be tilted in one direction. Thus, a new phase-correction method is required to conduct NRSE experiments using a complete ellipsoidal focusing mirror.

We propose a double-focusing method in which two identical ellipsoidal mirrors are arranged in series [6]. This arrangement enables us to correct the path length differences for large divergent beams using a complete ellipsoidal focusing mirror. In this study, we evaluated the effectiveness of this geometry both analytically and numerically. A Fourier time of 1 μ s is achievable using this method.

[1] R. Gähler, et al., Z. Phys. B, **65**, 269 (1987).

[2] M. Bleuel, et al., in: F. Mezei, et al., (Eds.), Neutron Spin Echo Spectroscopy, Springer, Future Developments in Resonance Spin Echo, 176 (2002).

[3] T. Weber, et al., Nucl. Instrum. Methods Phys. Res. A, **713**, 71 (2013).

[4] F. Funama, et al., JPS Conf. Proc., **33**, 011088 (2021).

[5] T. Hosobata, et al., JPS Conf. Proc., **22**, 011010 (2018).

[6] F. Funama, et al., Nucl. Instrum. Methods Phys. Res. A, **1010**, 165480 (2021).

E-mail of the corresponding author: funama.fumiaki.26e@st.kyoto-u.ac.jp

An introduction of the TOF-MIEZE spectrometer at J-PARC MLF BL06

Tatsuro ODA¹, Masahiro HINO¹, Fumiaki FUNAMA²,
Hitoshi ENDO³, Hidetoshi OHSHITA³, Tomohiro SEYA³, Yoshiji YASU³

¹Institute for Integrated Radiation and Nuclear Science, Kyoto University, Kumatori, Japan

²Department of Nuclear Engineering, Kyoto University, Kyoto, Japan

³Institute of Materials Structure Science / J-PARC Center, High Energy Accelerator Research Organization (KEK), Tokai, Japan

We present an introduction of the neutron spin-echo spectrometer at BL06 [1] at Materials and Life Science Experimental Facility (MLF), Japan Proton Accelerator Research Complex (J-PARC). The beamline has two spin-echo instruments using RF spin flippers: NRSE (neutron resonance spin-echo) and MIEZE (Modulation of intensity with zero effort [2]). We have tested features of MIEZE technique using time-of-flight of pulsed neutrons (TOF-MIEZE) [3]. This spectroscopy was applied to a long-range magnetic order in MnSi in a small angle scattering geometry [4]. The fine wavelength resolution of the pulse beam allows us to analyze the spin dynamics in a precise region of interest in (Q_x, Q_y) space. Such measurements can provide information for interpreting a microscopic model of transformation of the magnetic structure.

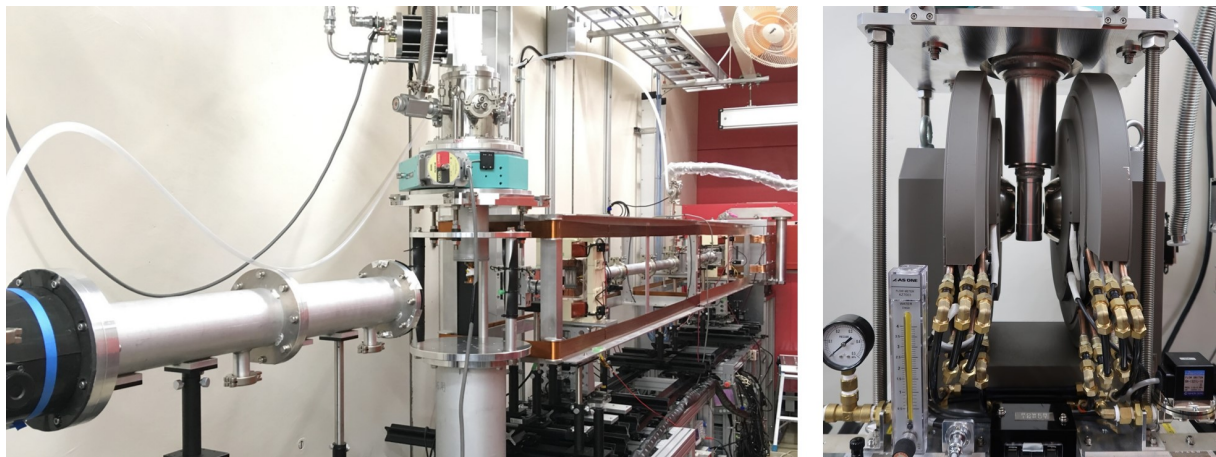


Figure: (left) MIEZE spectrometer at BL06. (right) Newly installed magnet and cold head.

[1] H. Endo, T. Oda, M. Hino, T. Hosobata, *Physica B* **564**, 91 (2019).

[2] R. Golub, R. Gähler, T. Keller, *Physica B* **180&181**, 899 (1992).

[3] T. Oda, M. Hino, H. Endo, H. Seto, Y. Kawabata, *Phys. Rev. Applied* **14**, 054032 (2020).

[4] T. Nakajima, T. Oda, M. Hino, H. Endo, K. Ohishi, K. Kakurai, A. Kikkawa, Y. Taguchi, Y. Tokura, T. Arima, *Phys. Rev. Research* **2**, 043393 (2020).

E-mail of the corresponding author: t_oda@rri.kyoto-u.ac.jp

Development of a large beam high efficiency radio-frequency neutron spin flipper for the polychromatic reflectometer CANDOR

Wangchun CHEN¹, Ross ERWIN¹, Peter TSAI¹, Md. T. HASSAN^{1,2}, Nancy HADAD¹, Charles MAJKRZAK¹

¹National Institute of Standards and Technology, Gaithersburg, Maryland 20899, USA

²Department of Materials Science & Engineering, University of Maryland, College Park, Maryland 20742, USA

The capability for performing longitudinal polarization analysis is important in studies of magnetic thin films and multilayers and is being developed for both specular and off-specular reflectivity measurements on the polychromatic reflectometer CANDOR at the National Institute of Standards and Technology Center for Neutron Research (NCNR). A critical component to such a capability is a large beam high efficiency radio-frequency (RF) neutron spin flipper. We report the design, simulation, and experimental characterization and optimization of the flipper. Unlike a conventional RF flipper, three permanent magnet guide field sections with air gaps are employed to provide a linear field gradient along the beam propagation direction over a large cross-sectional area. An RF oscillator based on coupling the resonant coil of a Hartley oscillator to the excitation coil was developed and provided a higher current, and thereby a larger RF amplitude, as compared to a conventional RF power amplifier. In addition, a neutron guide insert is necessary to be placed inside the RF coil to prevent loss of the intensity of the incident beam. An experimental means using two opaque ³He neutron spin filters was developed to allow for measurements of the flipping probability of the flipper at very high precision (10⁻⁴). The RF spin flipper (together with the two opaque ³He NSF's) has yielded a spatially uniform flipping ratio as high as 853(55) over a 6 cm by 15 cm ⁵⁸Ni-coated neutron guide with a flipping probability of 0.9999(2).

[1] W.C. Chen *et al.*, Rev. Sci. Instrum., **in press**.

E-mail of the corresponding author: wcchen@nist.gov

Status of the ^3He Program at the NCNR

Shannon Watson¹, Hannah Burrall¹, Wangchun Chen¹, Ross Erwin¹, Thomas Gentile¹

¹ National Institute of Standards and Technology, Gaithersburg, Maryland 20899, USA.

^3He neutron spin filters (NSFs) continue to be an integral part of the NIST Center for Neutron Research (NCNR) as the program continues to improve NSF performance on current instruments, such as the Small Angle Neutron Scattering (SANS) and Thermal Axis Spectrometer (TAS) instruments. The implementation of a Ge180 toroid cell has produced significant data on the Multi-Angle Crystal Spectrometer (MACS). These results are due to further improvements in polarized neutronic performance, improved cell lifetimes, neutron spin transport, and minimization of ^3He polarization loss occurred during the adiabatic fast passage (AFP) NMR based ^3He polarization inversion. The use of NSFs at the NCNR have been expanded to the Very Small Angle Neutron Scattering (VSANS) instrument followed by the Chromatic Analysis Neutron Diffractometer Or Reflectometer (CANDOR) and a new magnetostatic cavity for each.

E-mail of the corresponding author: swatson@nist.gov

Polarization Analysis Capability on vSANS at NCNR

Hannah Burrall¹, Shannon Watson¹, Kathryn Krycka¹, Wangchun Chen¹

¹National Institute of Standards and Technology, Gaithersburg, Maryland 20899, USA.

Polarization analysis capability using a ^3He neutron spin filter (NSF) as a spin analyzer has been developed on the very small-angle neutron scattering (vSANS) instrument at the National Institute of Standards and Technology Center for Neutron Research (NCNR). The polarized beam apparatus consists of a double-V supermirror polarizer, a radio-frequency (RF) spin flipper, and a ^3He analyzer. A ^3He analyzer cell is polarized offline by spin-exchange optical pumping and stored in a magnetically shielded solenoid that provides a homogeneous magnetic field along the neutron beam axis. Neutron spin flipping of the scattered beam is accomplished by inverting the ^3He polarization using the adiabatic fast passage nuclear magnetic resonance technique. Key features of practical applications for a ^3He NSF in polarization analysis on vSANS are large angular coverage, long ^3He polarization storage times even in the presence of stray fields from strong sample magnetic fields, and versatility of the sample field desired for an experiment.

We will present significant improvements in spin-analyzed SANS capabilities. The recently achieved high ^3He polarizations, together with a double-V supermirror cavity polarizer and a home-designed RF flipper allow us to achieve a flipping ratio as high as 100 with a neutron transmission of 50 % for the desired spin state of the ^3He analyzer. We have significantly improved the relaxation times of the ^3He analyzer up to 350 h even when the solenoid is placed close to a 1.6 T sample magnet, which has been achieved with an improved design of the magnetically shielded solenoid. The capability is fully integrated with a variety of sample field configurations to accommodate user's needs. The new polarization analysis capability on vSANS is creating opportunities for studies of hard matter investigations such as magnetic nanoparticle assemblies and magnetic nanowires.

E-mail of the corresponding author: hannah.burrall@nist.gov

Conference Participants

The following lists includes the names of those who registered for the conference by July 26, 2021 at 10:00 AM EST and answered “yes” to be included in the participant list during registration.

	Last Name	First Name	Organization
1	Adawi	Hind	Kent State University
2	Arai	Masatoshi	ESS
3	Babcock	Earl	JCNS at the MLZ
4	Balz	Christian	ISIS Neutron and Muon Source
5	Biniskos	Nikolaos	Forschungszentrum Jülich GmbH
6	Borchers	Julie	National Institute of Standards & Technology (NIST)
7	Briber	Robert	University of Maryland/NIST
8	Buck	Zachary	NIST - Materials Measurement laboratory
9	Burrall	Hannah	National Institute of Standards & Technology (NIST)
10	Chen	Wangchun	National Institute of Standards & Technology (NIST)
11	Crow	Lowell	Oak Ridge National Laboratory
12	Dalglish	Robert	ISIS Neutron and Muon Source /
13	Dally	Rebecca	National Institute of Standards & Technology (NIST)
14	Davis	Abigail	Oak Ridge National Laboratory
15	Dees	Eric	Indiana University Bloomington
16	Disch	Sabrina	Universität zu Köln
17	Durniak	Celine	The European Spallation Source
18	Faraone	Antonio	National Institute of Standards & Technology (NIST)
19	Fogh	Ellen	École Polytechnique Fédérale de Lausanne
20	Franz	Christian	Jülich Centre for Neutron Science
21	Fujita	Masaki	Institute for Materials Research, Tohoku University
22	Funama	Fumiaki	Kyoto University
23	Garlea	Ovidiu	Oak Ridge National Lab
24	Garvey	Christopher	Technische Universität München
25	Gaudet	Jonathan	NIST Center for Neutron Research
26	Gentile	Thomas	NIST - Physical Measurement Laboratory
27	Georgii	Robert	MLZ, TU München
28	Glavic	Artur	Paul Scherrer Institut
29	Gorkov	Dmitry	Institute of Physics II, University of Cologne, Germany / FRM2
30	Graham	Jennifer	ILL/University of Birmingham
31	Gutter	Alexander	National Institute of Standards & Technology (NIST)
32	Huber	Michael	NIST - Physical Measurement Laboratory

33	Ijiri	Yumi	Oberlin College
34	Ino	Takashi	KEK
35	Ioffe	Alexander	JCNS at MLZ, Munich
36	Jochum	Johanna	Research Neutron Reactor Heinz Maier-Leibnitz (MLZ)
37	Kakurai	Kazuhisa	RIKEN CEMS
38	Kibalin	Iurii	LLB, CEA-Saclay
39	Kinane	Christy	ISIS Neutron and Muon Source
40	Konik	Petr	JCNS at MLZ, Munich
41	Kreuzpaintner	Wolfgang	Spallation Neutron Source Science Center, Dongguan 523803, China
42	Kuhn	Steve	Indiana University Bloomington
43	Kurumaji	Takashi	The University of Tokyo
44	Lamichhane	Tej Nath	Oak Ridge National Lab
45	Le	Duc	Science and Technology Facilities Council
46	Lee	Wai Tung	European Spallation Source
47	Leiner	Jonathan	Heinz Maier-Leibnitz Zentrum (MLZ), Technical University Munich, 85748 Garching, Germany
48	Li	Fankang	Oak Ridge National Laboratory
49	Liu	Yaohua	Oak Ridge National Laboratory
50	Lussier	Jean-Guy	Kent State University
51	Lynn	Jeffrey	National Institute of Standards & Technology (NIST)
52	Maity	Avishek	Heinz Maier-Leibnitz Zentrum (FRM II), Technical University of Munich, 85748 Garching, Germany
53	Manning	Andrew	ANSTO
54	Mattauch	Stefan	JCNS
55	McKay	Sam	Indiana University
56	Nejati	Ammar	Forschungszentrum Jülich, Jülich Centre for Neutron Science JCNS at MLZ, Garching, Germany
57	Nemkovskiy	Kirill	ISIS Neutron and Muon Source
58	Oda	Tatsuro	Kyoto University
59	Oku	Takayuki	Japan Atomic Energy Agency
60	Pardo	Miguel	Instituto de Nanociencia y Materiales de Aragón
61	Park	Jitae	MLZ, TU München
62	Parnell	Steven	TU Delft
63	Paul	Amitesh	Guangdong Technion-Israel Institute of Technology, Shantou 515063, Guangdong, China
64	Plumb	Kemp	Brown University
65	Pynn	Roger	Indiana University Bloomington
66	Quintero	Diana	Universitet i Stavanger
67	Rai	Venus	v.raai@fz-juelich.de

68	Ratcliff	William	National Institute of Standards & Technology (NIST)
69	Salazar Alvarez	Germán	Uppsala University
70	Schafer	Benjamin	Harvard University
71	Schmalzl	Karin	JCNS at ILL, Grenoble, France
72	Schroeder	Almut	Kent State University
73	Singh	Deepak	University of Missouri
74	Skoulatos	Markos	TU Munich
75	Smith	Gregory	ISIS Neutron and Muon Source
76	Stellhorn	Annika	Forschungszentrum Juelich GmbH, JCNS-2, Wilhelm-Johnen-Strasse, 52428 Juelich GERMANY
77	Stewart	Ross	STFC
78	Su	Yixi	Forschungszentrum Jülich, Jülich Centre for Neutron Science JCNS at MLZ, Garching, Germany
79	Syed Mohd	Amir	China Spallation Neutron Source (CSNS)
80	Tang	Ran	Heinz Maier-Leibnitz Zentrum (FRM II), Technical University of Munich, 85748 Garching, Germany
81	Tong	Xin	China Spallation Neutron Source
82	Tosado	Jacob Alexander	Oak Ridge National Laboratory
83	Voigt	Jörg	Forschungszentrum Jülich GmbH
84	Wang	Tianhao	China Spallation Neutron Source
85	Watson	Shannon	National Institute of Standards & Technology (NIST)
86	Xie	Wu	DESY
87	Xu	Jianhui	Heinz Maier-Leibnitz Zentrum (MLZ), Technische University Munich, 85748 Garching, Germany
88	Yang	Detian	Physics and Astronomy Department, University of Nebraska-Lincoln
89	Yano	Shinichiro	NSRRC
90	Ye	Qiang	University of Maryland - College Park
91	Zhang	Junpei	Institute of High Energy Physics of China
92	Zhang	Fengqi	TU Delft
93	Zhao	Yang	University of Maryland / NIST
94	Zhernenkov	Kirill	Jülich Centre for Neutron Science JCNS, Forschungszentrum Jülich GmbH